Mail.XML 14.0A Technical Specification

FAST

October 21, 2016

FAST-14.0A-R35 Edition 2 Change 0

Prepared by

United States Postal Service

Release Version Support

This document contains information pertaining to Mail.XML release version 14.0A and the following USPS FAST Releases:

- Release 27 January 2014
- Release 28 July 2014
- Release 30 January 2015
- Release 31 May 2015
- Release 32 January 2016
- Release 34 September 2016
- Release 35 January 2017

Technical Support from the USPS Help Desk and Tier 2 Support:

The USPS provides Mail.XML technical support for mailers/vendors and support is only specific to the business rules it pertains to implementation of business transactions, error codes/descriptions and exception handling with the Mail.XML implementations.

The USPS does not provide nor it is equipped to provide technical support for software development tools or IDEs (Integrated Development Environments) like Visual Studio, and software development related activities as they pertain to different technology specific programming environments for different companies, such as .Net, Java, Visual Basic, Power Builder, C, C++ etc.

The Mailer/Vendor is responsible for obtaining technical support and assistance directly from the IDE vendor such as Microsoft, IBM or Sun/Oracle for software development related help needs.

Trademarks

The following trademarks are owned by the United States Postal Service:

ACS®, CASS™, CASS Certified™, Certified Mail™, DMM®, FAST®, First-Class™, First-Class Mail®, Full-Service ACS™, IM®, IMb™, IMb Tracing™, Intelligent Mail®, OneCode ACS®, OneCode Solution®, PLANET Code®, *PostalOne!*®, POSTNET™, Postal Service™, Priority Mail®, Registered Mail™, RIBBS™, Standard Mail®, USPS Marketable Mail®, The Postal Service®, United States Postal Service®, USPS®, USPS.COM®, ZIP®, ZIP Code™, ZIP + 4® and ZIP+4™.

IDEAlliance and Mail.dat are registered trademarks of the International Digital Enterprise Alliance, Inc. (IDEAlliance).

Sun, Sun Microsystems, and Java are trademarks or registered trademarks of Sun Microsystems, Inc.

Microsoft, Microsoft Windows, and Microsoft Internet Explorer are registered trademarks of Microsoft Corporation.

All other trademarks used are the property of their respective owners.

Table of Contents

Table of Contents i

Document Change History xiii

1. Postal Service Mail.XML Technical Specification 1

1.1 Program Overview 1
1.2 General XML and Web Services Information 1
1.3 Web Service 2
1.4 About Schema Modularization 2
1.5 What Schemas Cover FAST Functionality? 3
1.6 USPS® Limitation Rule on Transaction Requests 3
1.7 USPS Asynchronous Transaction rule (24 Hour Rule) with Tracking IDs 3
1.8 Roadmap of Mail.XML 3
1.9 Purpose 5
1.10 Intended Audience 5
1.11 About This Document 5
1.12 How to Read Data Structure 6
1.13 Issue Resolution 6
1.14 Environments Supported by USPS 6
1.15 *PostalOne!* WSDL Information 6
1.16 Type of WSDLs 7
1.16.1 Consuming Message-Type WSDLs: 7
1.17 Exceptions 7

2. *PostalOne!* – FAST Mail.XML Web Services 8

2.1 Overview 8
2.2 Access to *PostalOne!* - FAST Web Services 8
2.3 *PostalOne!* - FAST Mail.XML Web Services Supported Messages 8
2.4 FAST Workflows for Mail.XML 8
2.4.1 Create One-Time Appointment (Single Entity Scheduling) 8
2.4.2 Manage One Time Appointment (Single Entity Scheduling) 9
2.4.3 Updating a Recurring Appointment Instance (Single Entity Scheduling) 9
2.4.4 Retrieving CSA Data 9
2.4.5 Partner Appointment Query 9
2.4.6 Scheduler wants to update only logistics information 9
2.4.7 Receiving Closeout Information 10
2.4.8 One-Time Appointment and Joint Scheduling 10
2.4.9 Standalone content and Joint Scheduling 10
2.4.10 Recurring Appointments and Joint Scheduling (Pure Periodicals) 11
2.4.11 MessageRetrieval Request/Response 12
2.4.12 Create a Parcel Return Service Appointment 12

_Toc403991029

Copyright © 2016 USPS®. All Rights Reserved.

2.4.13 Update a Parcel Return Service Appointment 12
2.5 Mail.dat Transportation Updates for Recurring Appointments 12
2.6 Data Structure: AllDeliveryApptCloseoutRequest 13
3. Mail.XML 14.0A Messages - FAST Message and Data Structures 14
3.1 DeliveryApptShellCreateRequest 14
3.2 DeliveryApptShellCreateResponse 15
3.3 DeliveryApptShellUpdateRequest 15
3.4 DeliveryApptShellUpdateResponse 16
3.5 DeliveryApptShellCancelRequest 17
3.6 DeliveryApptShellCancelResponse 18
3.7 DeliveryContentCreateRequest 19
3.8 DeliveryContentCreateResponse 19
3.9 DeliveryContentUpdateRequest 20
3.10 DeliveryContentUpdateResponse 21
3.11 DeliveryContentQueryRequest 21
3.12 DeliveryContentQueryResponse 22
3.13 DeliveryContentCancelRequest 23
3.14 DeliveryContentCancelResponse 24
3.15 RecurringApptQueryRequest 26
3.16 RecurringApptQueryResponse 26
3.17 ConsigneeGoodsReceipt 27
3.18 ConsigneeGoodsReceiptDelivery 27
3.19 DeliveryApptCancelCreateRequest 29
3.20 DeliveryApptCancelCreateResponse 29
3.21 DeliveryApptCreateRequest 30
3.22 DeliveryApptCreateResponse 31
3.23 DeliveryApptUpdate 32
3.24 DeliveryApptUpdateRequest 32
3.25 DeliveryApptUpdateResponse 34
3.26 DeliveryApptQueryRequest 34
3.27 DeliveryApptQueryResponse 36
3.28 DeliveryApptCancelRequest 37
3.29 DeliveryApptCancelResponse 38
3.30 DeliveryReApptRequest 38
3.31 PartnerApptQueryRequest 39
3.32 PartnerApptQueryResponse 40
3.33 UnscheduledConsigneeGoodsReceipt 41
3.34 AllDeliveryApptCloseoutRequest 41
3.35 AllApptCloseoutResponse 42

Copyright © 2016 USPS®. All Rights Reserved.

3.36 AllApptCloseoutNotification 43
3.37 AllApptCloseoutDelivery 44
3.38 CustomerSupplierAgreementQueryRequest 45
3.39 CustomerSupplierAgreementQueryResponse 46
3.40 StaleContentQueryRequest 47
3.41 StaleContentQueryResponse 48
3.42 StaleContentNotification 49
3.43 StaleContentDelivery 50
3.44 USPSDeliveryContentUpdatedQueryRequest 50
3.45 USPSDeliveryContentUpdatedQueryResponse 51
3.46 USPSDeliveryContentUpdatedNotification 52
3.47 USPSDeliveryContentUpdatedDelivery 53
3.48 PartnerContentAssignmentRequest 54
3.49 PartnerContentAssignmentResponse 55

4. Additional information 57

4.1 Additional Rules/Constraints 57
4.1.1 Delivery Appointment Query Response 59
4.1.2 Delivery Appointment Create Acceptance Response 59
4.1.3 Delivery Appointment Create Rejection Response 59
4.1.4 Delivery Appointment Update Acceptance Response 60
4.1.5 Delivery Appointment Update Rejection Response 60
4.1.6 Delivery Appointment Cancel Create Acceptance Response 60
4.1.7 Delivery Content Accept Response 60
4.1.8 Delivery Content Reject Response 60
4.1.9 Delivery Content Cancel Response 60
4.1.10 Delivery Appointment Shell Accept Response 60
4.1.11 Delivery Appointment Shell Reject Response 60
4.1.12 Delivery Appointment Shell Cancel Response 60
4.1.13 Delivery Content Query Response 60
4.1.14 Recurring Appointment Query Response 61
4.1.15 Partner Appointment Query Response 61

4.2 Business Rules 61
4.2.1 New Business Rules 61
4.2.2 Existing Business Rules 62
4.2.3 Detail Info Block 69

4.3 Multistop Support 69
4.3.1 FAST Online Application 69
4.3.2 Web Services 69

4.4 Error Codes/Return Values 69

4.5 Drop Entry Point Warning Codes and Descriptions 82

4.6 Fault Codes 86

4.7 Support Mailer SubmitterTrackingID on MailXML 14.0A Messages 87

Copyright © 2016 USPS®. All Rights Reserved.

4.7.1 Business Rules/ Assumptions: ... 87
4.7.2 Possible Scenarios for using and identifying duplicate requests: ... 88
4.8 Web Service Additional Constraints ... 89
4.9 Message Response Retrieval Request Processing ... 89
4.10 SchedulerContent ID ... 90
4.11 Closeout Messages ... 90
4.11.1 How Closeout Data for MailOwner and MailPreparer are Disseminated ... 90
4.12 Identifying Mail Owner and Mail Preparer in Appointment Messages ... 90
4.13 Identifying Mail Owner and Mail Preparer in Content Messages ... 90
4.14 Appointment Shell Cancellation Messages ... 91
4.15 *PostalOne!* - FAST Web Services Authentication: ... 91

5. Appendix A - Mail.XML 14.0A Complex Types ... 93
5.1 Complex Type: ActualBedLoadType ... 93
5.2 Complex Type: actualPalletType ... 93
5.3 Complex Type: addressType ... 93
5.4 Complex Type: allDeliveryApptCloseoutAcceptType ... 94
5.5 Complex Type: apptBlockGoodsType ... 94
5.6 Complex Type: apptBlockUnscheduledGoodsType ... 96
5.7 Complex Type: apptBlockRequestType ... 96
5.8 Complex Type: apptBlockUpdateType ... 97
5.9 Complex Type: apptInfoType ... 97
5.10 Complex Type: availableSlotType ... 97
5.11 Complex Type: availableHourType ... 98
5.12 Complex Type: basicReturnInfoType ... 98
5.13 Complex Type: bedloadUnitType ... 98
5.14 Complex Type: bedloadHandlingUnitType ... 99
5.15 Attribute Type: CancelCreateMsgHeaderInfo ... 99
5.16 Complex Type: carrierType ... 100
5.17 Complex Type: containerErrorWarningBlockType ... 100
5.18 Complex Type: contentCancelType ... 100
5.19 Complex Type: contentDetailInfoType ... 101
5.20 Complex Type: contentDetailInfoUpdateType ... 101
5.21 Complex Type: contentUSPSSummaryType ... 102
5.22 Complex Type: commonContactType ... 103
5.23 Complex Type: consigneeFacilityType ... 104
5.24 Complex Type: ContactIDType ... 104
5.25 Attribute Type: contentAssignmentRequestMsgHeaderInfo ... 105
5.26 Complex Type: csaInfoType ... 105
5.27 Complex Type: csaDispatchType ... 105

Copyright © 2016 USPS®. All Rights Reserved.

5.28 Attribute Type: CustomerSupplierAgreementQueryMsgHeaderInfo 106
5.29 Complex Type: deliveryApptAcceptType 106
5.30 Complex Type: deliveryApptUpdateAcceptType 107
5.31 Complex Type: deliveryApptShellAcceptType 107
5.32 Complex Type: deliveryApptShellRejectType 108
5.33 Complex Type: deliveryApptUpdateRejectType 108
5.34 Complex Type: deliveryContentUpdatedType 109
5.35 Complex Type: DeliveryContentAcceptType 109
5.36 Complex Type: DeliveryContentRejectType 110
5.37 Complex Type: DeliveryContentUpdateAcceptType 110
5.38 Complex Type: DeliveryContentUpdateRejectType 111
5.39 Attribute Type: DeliveryContentHeaderInfo 111
5.40 Attribute Type: DeliveryContentUpdateHeaderInfo 111
5.41 Attribute Type: DeliveryContentQueryMsgHeaderInfo 112
5.42 Attribute Type: DeliveryContentHeaderInfoCancel 112
5.43 Complex Type: DeliverySummaryType 112
5.44 ComplexType: detailInfoType 113
5.45 Complex Type: eFileSamplingTimeType 113
5.46 Complex Type: GPSCoordinates 113
5.47 Attribute Type: LargeTransactionDividerGroupOptionalType 114
5.48 ComplexType: MailDatSummaryType 114
5.49 Attribute Type: MailXMLHeaderInfo 115
5.50 ComplexType: OneTimeApptType 115
5.51 ComplexType: OptionalApptType 115
5.52 ComplexType: palletUnitType 116
5.53 ComplexType: palletPresortType 116
5.54 Complex Type: partnerContentAssignmentType 116
5.55 Complex Type: partnerApptBlockType 117
5.56 Attribute Type: PartnerApptRequestHeaderInfo 117
5.57 Attribute Type: PickupRequestHeaderInfo 117
5.58 Attribute Type: PickupResponseHeaderInfo 118
5.59 Complex Type: pickupApptBlockRequestType 118
5.60 Complex Type: pickupApptBlockResponseType 118
5.61 Complex Type: queryErrorType 119
5.62 Complex Type: recurringApptType 119
5.63 Complex Type: recurringApptBlockType 119
5.64 Complex Type: recurringApptType 120
5.65 Attribute Type: RecurringApptQueryRequestHeaderInfo 120
5.66 Attribute Type: RecurringApptQueryResponseHeaderInfo 121

Copyright © 2016 USPS®. All Rights Reserved.

5.67 Attribute Type: RequestMsgHeaderInfo 121
5.68 Attribute Type: ResponseMsgHeaderInfo 122
5.69 Attribute Type: ResponseApptUpdateMsgHeaderInfo 122
5.70 Complex Type: ReturnInfoType 123
5.71 Complex Type: optReturnInfoType 123
5.72 Complex Type: slotAvailabilityType 123
5.73 Complex Type: StaleContentNotificationElementType 124
5.74 Attribute Type: StatusRequestMsgHeaderInfo 124
5.75 Attribute Type: StatusRequestByTimeMsgHeaderInfo 124
5.76 Complex Type: participantIDType 124
5.77 Complex Type: SubmittingSoftwareType 125
5.78 Complex Type: trayHandlingUnitType 125
5.79 Complex Type: trailerInfoType 126
5.80 Complex Type: trailerType 126
5.81 Attribute Type: UnscheduledResponseMsgHeaderInfo 126
5.82 Complex Type: USPSDeliveryContentUpdatedNotificationMsgHeaderInfo 127
5.83 Complex Type: USPSSummaryType 127
5.84 Complex Type: USPSContainerInfoType 128
5.85 Complex Type: uspsDetailType 129
5.86 Complex Type: uspsClosedBySVType 129

6. Appendix B - Mail.XML 14.0A Simple Types 130
6.1 simpleType: actionCodeType 130
6.2 simpleType: addressCorrectionMoveType 130
6.3 simpleType: additionalInHomeRangeType 130
6.4 simpleType: adjustmentStatusType 130
6.5 simpleType: adjustmentType 130
6.6 simpleType: agencyCostCodeType 130
6.7 simpleType: apptMethodType 130
6.8 simpleType: apptStateType 131
6.9 simpleType: apptStatusType 131
6.10 simpleType: apptTypeType 131
6.11 simpleType: barcodeRateType 131
6.12 simpleType: billReasonCodeType 131
6.13 simpleType: bundleDetailLevelType 131
6.14 simpleType: bundleRecordStatusType 132
6.15 simpleType: bundleStatusType 132
6.16 simpleType: canadaAdMailOnlyType 132
6.17 simpleType: chargeableBundleLevelType 132
6.18 simpleType: chargeableContainerType 133

Copyright © 2016 USPS®. All Rights Reserved.

6.19 simpleType: chargeableContainerLevelType 133
6.20 simpleType: chargeableEntryLevelType 133
6.21 simpleType: classNotificationType 133
6.22 simpleType: closeoutIrregularitiesType 133
6.23 simpleType: communicationRoleType 134
6.24 simpleType: componentWeightSourceType 134
6.25 simpleType: componentWeightStatusType 134
6.26 simpleType: consigneeContentIDType 134
6.27 simpleType: containerBundleStatusType 134
6.28 simpleType: IMtbType 135
6.29 simpleType: IMpbType 135
6.30 simpleType: containerAcceptanceDateType 135
6.31 simpleType: cccLevelType 135
6.32 simpleType: containerGrossWeightType 135
6.33 simpleType: containerHeightType 135
6.34 simpleType: containerLevelType 135
6.35 simpleType: containerPickupDateType 137
6.36 simpleType: containerPickupTimeType 138
6.37 simpleType: containerShipDateType 138
6.38 simpleType: containerShipTimeType 138
6.39 simpleType: contactType 138
6.40 simpleType: containerHeightSourceType 138
6.41 simpleType: CQTdatabaseIDType 138
6.42 simpleType: creditDebitIndicator 138
6.43 simpleType: CRIDType 138
6.44 simpleType: cRIDStatusType 139
6.45 simpleType: csaTemplateType 139
6.46 simpleType: csaStatusType 139
6.47 simpleType: databaseContainerIDType 139
6.48 simpleType: dayFrequencyType 139
6.49 simpleType: daysOfWeekType 139
6.50 simpleType: DirectOrMixedCategoryType 140
6.51 simpleType: dec18-8 140
6.52 simpleType: deliverabilityCodeType 140
6.53 simpleType: electronicFileType 140
6.54 simpleType: emailType 140
6.55 simpleType: enclosedByType 140
6.56 simpleType: entryDiscountType 141
6.57 simpleType: entryFacilityType 141

Copyright © 2016 USPS®. All Rights Reserved.

6.58 simpleType: entryPointEDPostalCodeType 141
6.59 simpleType: entryPointEDFacilityTypeType 141
6.60 simpleType: entryPointADLocaleKeyType 141
6.61 simpleType: entryPointADPostalCodeType 141
6.62 simpleType: es3 141
6.63 simpleType: es4 141
6.64 simpleType: es5 142
6.65 simpleType: exemptionCodeType 142
6.66 simpleType: fASTSchedulerIDType 142
6.67 simpleType: feeNotificationType 142
6.68 simpleType: flatRateIndicatorType 142
6.69 simpleType: formType 142
6.70 simpleType: fullServiceComplianceIndicatorType 143
6.71 simpleType: fspiType 143
6.72 simpleType: gPSSystemType 143
6.73 simpleType: IDType 143
6.74 simpleType: IMcbType 143
6.75 simpleType: iMBType 143
6.76 simpleType: iMBarcodeIDType 143
6.77 simpleType: iMBSerialNumber6Type 144
6.78 simpleType: iMBSerialNumber9Type 144
6.79 simpleType: iMBUpperSerializationType 144
6.80 simpleType: iMBLowerSerializationType 144
6.81 simpleType: incentiveTypeType 144
6.82 simpleType: includedInOtherDocType 144
6.83 simpleType: internalDateType 144
6.84 simpleType: internationalPSPartType 144
6.85 simpleType: internationalZoneType 145
6.86 simpleType: internationalPSPartSectionType 145
6.87 simpleType: internationalPriceGroupType 145
6.88 simpleType: inCountyOutCountyIndicatorType 145
6.89 simpleType: jobIDType 146
6.90 simpleType: localeKeyType 146
6.91 simpleType: inductionStatusType 146
6.92 simpleType: logicalPhysicalBundleIndicatorType 146
6.93 simpleType: logicalPhysicalContainerIndicatorType 146
6.94 simpleType: mailAgreementTypeType 146
6.95 simpleType: mailClassType 146
6.96 simpleType: maildatContainerStatusType 146

Copyright © 2016 USPS®. All Rights Reserved.

6.97 simpleType: mailerID6Type 147
6.98 simpleType: mailerID9Type 147
6.99 simpleType: mailXMLContainerType 147
6.100 simpleType: mailXMLPresentationCategoryType 148
6.101 simpleType: manifestType 148
6.102 simpleType: manifestMailClassType 148
6.103 simpleType: manifestRateLevelType 148
6.104 simpleType: manifestExtraServiceCode 149
6.105 simpleType: mIDStatusType 150
6.106 simpleType: meteredAffixedMethodType 150
6.107 simpleType: monthType 150
6.108 simpleType: moveUpdateMethodType 150
6.109 simpleType: MPUIDType 150
6.110 simpleType: ns02 150
6.111 simpleType: ns03 150
6.112 simpleType: ns04 151
6.113 simpleType: ns05 151
6.114 simpleType: ns06 151
6.115 simpleType: ns09 151
6.116 simpleType: ns10 151
6.117 simpleType: ns11 151
6.118 simpleType: ns22 151
6.119 simpleType: n01 151
6.120 simpleType: n02 151
6.121 simpleType: n03 151
6.122 simpleType: n05 152
6.123 simpleType: n06 152
6.124 simpleType: addressType 152
6.125 simpleType: operatngModeType 152
6.126 simpleType: onePassPlannedOrActualFlagType 152
6.127 simpleType: packageIDType 152
6.128 simpleType: PackageServicesType 152
6.129 simpleType: packagingMethodType 152
6.130 simpleType: palletHandlingUnitType 153
6.131 simpleType: palletType 153
6.132 simpleType: parentContainerRefIDType 153
6.133 simpleType: percentageType 153
6.134 simpleType: periodicalPriceType 153
6.135 simpleType: permitTypeType 154

Copyright © 2016 USPS®. All Rights Reserved.

6.136 simpleType: phoneNumberType 154
6.137 simpleType: pickupOrDeliveryType 154
6.138 simpleType: planetCodeType 154
6.139 simpleType: postageGroupingIDType 154
6.140 simpleType: postagePaymentMethodType 154
6.141 simpleType: postageStatementLineNumber1Type 154
6.142 simpleType: postageStatementLineNumber2Type 155
6.143 simpleType: postageStatementLineNumber3Type 155
6.144 simpleType: postageStatementStatusType 156
6.145 simpleType: priceType 156
6.146 simpleType: primarySecondaryIndicatorType 156
6.147 simpleType: processingCategoryType 156
6.148 simpleType: processingCodeType 157
6.149 simpleType: qualificationReportClassType 157
6.150 simpleType: rateCategoryType 157
6.151 simpleType: rateLevelType 160
6.152 simpleType: rateLevelIndicatorType 160
6.153 simpleType: rateType 160
6.154 simpleType: reasonCodeType 161
6.155 simpleType: recurringStatusType 161
6.156 simpleType: reservationNumberType 161
6.157 simpleType: roleType 162
6.158 simpleType: responsibleTransportationPartyType 162
6.159 simpleType: RoutingZipCodeType 162
6.160 simpleType: s01 163
6.161 simpleType: s02 163
6.162 simpleType: s03 163
6.163 simpleType: s04 163
6.164 simpleType: s05 163
6.165 simpleType: s06 163
6.166 simpleType: s07 163
6.167 simpleType: s08 164
6.168 simpleType: s09 164
6.169 simpleType: s10 164
6.170 simpleType: s11 164
6.171 simpleType: s12 164
6.172 simpleType: s15 164
6.173 simpleType: s16 164
6.174 simpleType: s18 165

Copyright © 2016 USPS®. All Rights Reserved.

6.175 simpleType: s20 ... 165
6.176 simpleType: s22 ... 165
6.177 simpleType: s25 ... 165
6.178 simpleType: s28 ... 165
6.179 simpleType: s30 ... 165
6.180 simpleType: s37 ... 165
6.181 simpleType: s40 ... 165
6.182 simpleType: s45 ... 166
6.183 simpleType: s50 ... 166
6.184 simpleType: s60 ... 166
6.185 simpleType: s64 ... 166
6.186 simpleType: s66 ... 166
6.187 simpleType: s80 ... 166
6.188 simpleType: s256 ... 166
6.189 simpleType: s260 ... 167
6.190 simpleType: sackingBasisType ... 167
6.191 simpleType: scheduledInductionDateType ... 167
6.192 simpleType: scheduledInductionTimeType ... 167
6.193 simpleType: scheduledInHomeDateType ... 167
6.194 simpleType: serialNumberSevenOrEleven ... 167
6.195 simpleType: serialNumberTenOrFourteen ... 167
6.196 simpleType: serviceLevelIndicatorType ... 167
6.197 simpleType: serviceCodeType ... 168
6.198 simpleType: ServiceTypeCodeType ... 168
6.199 simpleType: sortationLevelType ... 168
6.200 simpleType: serviceSubCodeType ... 169
6.201 simpleType: standardFlatTypeType ... 169
6.202 simpleType: stateCode ... 169
6.203 simpleType: statusType ... 170
6.204 simpleType: stopDesignatorType ... 171
6.205 simpleType: surchargeType ... 171
6.206 simpleType: totalWeightType ... 171
6.207 simpleType: trailerLengthType ... 171
6.208 simpleType: transportationMethodType ... 171
6.209 simpleType: transportationModeType ... 171
6.210 simpleType: transShipBoLNumberType ... 171
6.211 simpleType: trayType ... 172
6.212 simpleType: trayTypeIndicatorType ... 172
6.213 simpleType: truckDispatchNumberType ... 172

Copyright © 2016 USPS®. All Rights Reserved.

6.214 simpleType: unitLoadType 172
6.215 simpleType: uOMType 172
6.216 simpleType: uniqueContainerIDType 174
6.217 simpleType: userInformationLine1Type 174
6.218 simpleType: userInformationLine2Type 174
6.219 simpleType: userLicenseCodeType 174
6.220 simpleType: uspsPickupType 174
6.221 simpleType: verificationLocationType 174
6.222 simpleType: wastedPieceIndicatorType 174
6.223 simpleType: weekFrequencyType 175
6.224 simpleType: weightBreakType 175
6.225 simpleType: yesNo 175
6.226 simpleType: zipCodeThreeOrFiveDigit 175
6.227 simpleType: zoneICType 175
6.228 simpleType: onePassOrTwoPassType 176
6.229 simpleType: USPSPriceIncentiveType 176
6.230 simpleType: ContentOfMailType 176
6.231 simpleType: uspsPackageUniqueCharacteristicType 176
6.232 simpleType: StandardFlatTypeType 176
6.233 simpleType: MarketingOrFulfillmentType 176
6.234 simpleType: MLOCRRateType 176
6.235 simpleType: closeoutResolutionType 177
6.236 simpleType: valueAddedServiceType 177
6.237 simpleType: IMcbInfoType 177

7. Appendix C - WSDLs and XSDs 178

8. Change History Archive 179

8.1 184
8.2 serviceCodeType 184
8.3 palletType 184
8.4 palletHandlingUnitType 184
8.5 USPSContainerInfoType 184

INDEX ..... A

Copyright © 2016 USPS®. All Rights Reserved.

Document Change History

FAST-14.0A-R35 Edition 2 Change 0:

Date	Section	Title	Description
10/21/2016	All	All	Updated Title Page and footers
10/21/2016	1.8	Roadmap of Mail.XML	Added R35 and denoted retirement of Mail.XML 12.0A and 12.0B
10/21/2016	4.4	Error Codes/Return Values	Added new PRS error messages: 3590, 3591, 3592; updated Standard Mail references to USPS Marketable Mail: 3064, 4018, 4019, 4020, 4021
10/21/2016	6	Appendix B	Updated Standard Mail references to USPS Marketable Mail

Copyright © 2016 USPS®. All Rights Reserved.

1. Postal Service Mail.XML Technical Specification

1.1 Program Overview

The *PostalOne!*® system is an electronic suite of services being developed for business mailers by the United States Postal Service® to significantly improve the mailing process. The system takes advantage of the advances in technology and leverages them to significantly improve and simplify the mailing experience.

One of the ways in which the system enables customers to electronically send detailed information to *PostalOne!* is using the mailing industry's standardized Mail.XML™ format. Mail.XML is an XML-based IDEAlliance® specification for web services. Web services use simple HTTP(s) protocol to communicate data over the Internet, bypassing technology-specific restrictions and avoiding network-related security rules. See the IDEAlliance Mail.XML specifications at http://www.idealliance.org.

All business functions supported by the USPS as part of the Mail.XML implementation are based upon SOA (Services Oriented Architecture). With this architecture, mailer's software manages the data transactions for query, create, update, and cancel business functions as well as subscription model. Additionally, mailers' software is able to receive synchronous and asynchronous transactions through Web Services protocol from the USPS in support of the just-in-time communication architecture.

The Postal Service implementation of Mail.XML is a complement to Mail.dat. Mailers using Mail.dat can continue to use it as a database, but can use Mail.XML for communication and automation of business to business processing. Mail.XML allows business function-specific communication and faster change management processes with little to no impact to other service providers. For example, you can add optional fields or new messages without requiring software in the mailing supply chain to change. This is a core improvement area for the Mail.dat® specification.

Mail.XML allows the support of electronic documentation and end-to-end mailing supply chain business process management for a multitude of business processes. Mail.XML includes qualification reports, container and bundle reports, spoilage, eDropShip, containerization nesting, postage statements, postage adjustments, postage status query information, piece detail, piece ranging, and many other business process related communications. Mail.XML also provides the ability to electronically access USPS full-service data and to perform business functions related to full-service. Mail.XML allows create, update, and cancel transactions for the Cast of Characters (brokering of information) messages. Mail.XML supports copalletization, mixed mailing, manifest mailing, and business processes specific to MLOCR and continuous mailing environments.

One fundamental difference in the Mail.dat file and in Mail.XML messages is information content. For example, for qualification reports and postage statements Mail.dat calculates from the raw data in several Mail.dat files the copies and pieces at each price level in the qualification report and the postage statements. This sometimes leads to round-off differences compared to qualification reports and postage statements calculated by the mailer using the same Mail.dat file. In Mail.XML, the mailer provides the numbers of copies and pieces for each price level directly and there is less round-off error.

The Postal Service Mail.XML Technical Specifications, 2014 is separated based on subject matter into the following volumes:

Postal Service Mail.XML Technical Specification for Postage Payment & Reporting (eDoc)

Postal Service Mail.XML Technical Specification for Appointment Scheduling (FAST)

Postal Service Mail.XML Technical Specification for Profiles & Full-Service Feedback (MID-CRID)

Postal Service Mail.XML Technical Specification for Postage Payment and Reporting (eDoc)

This document describes the messages for the FAST system for appointment and content management.

1.2 General XML and Web Services Information

XML

XML stands for eXtensible Markup Language and it is designed to transport and store data. For general information on XML, please visit the XML Tutorial at w3schools.com.

XSD

Copyright © 2016 USPS®. All Rights Reserved.

An XSD is the XML Schema that describes the structure of an XML document. For general information on XSD, please visit the XML Schema Tutorial at w3schools.com.

1.3 Web Service

A Web Service is a feature that converts your software into internet-based software and publishes its functions/message to the users of the internet. For general information on Web Services, please visit the following tutorials at www.w3schools.com:

- Web Services Tutorial
- WSDL Tutorial
- SOAP Tutorial

1.4 About Schema Modularization

Mail.XML messages will be grouped into 6 sets:

- Transportation Messages (focus of this guide)
- Mailing Messages
- Data Distribution Messages
- Identification Messages
- Supply Chain Messages
- System Messages

The underlying schemas have been modularized to reflect these distinct message sets. Additionally, three “shared” or “common” schemas have been developed and they are:

1. One stores simple Mail.XML Mailing Message Specification type definitions that can be shared across message sets.
2. A second common module is made up of common elements and complex types that are shared across two or more message sets.
3. The final common module is made up of system messages and the attributes, elements and complex types that are unique to these messages.

Mail.XML schema modules are designed to stand alone, separated by business functions, enabling those interested in one or more message sets to develop and validate just those message sets without the requirement to address the entire Mail.XML specification. Each module will validate by itself or in combination with all other message sets when the entire Mail.XML Specification is considered. In addition, each module will be versioned separately.

Version numbers are contained within the namespace designation. Modules will be documented individually as well.

The following Mail.XML XSD modules/namespaces have been developed:

- **mailxml_tm.xsd**: This module contains all the transportation (or FAST) messages with their attributes, elements and complex types that are unique to these messages. **Namespace=mailxml_tm**
- **mailxml_mm .xsd**: This module contains all the mailing messages (eDoc) with their attributes, elements and complex types that are unique to these messages. **Namespace=mailxml_mm**
- **mailxml_dd.xsd**: This module contains all the data distribution messages with their attributes, elements and complex types that are unique to these messages. **Namespace=mailxml_dd**
- **mailxml_id.xsd**: This module contains all the identification messages (CRID, MID etc.) with their attributes, elements and complex types that are unique to these messages. **Namespace=mailxml_id**
- **mailxml_sc xsd**: This module contains all the supply chain messages (Cross functional container based and other Mail.dat/Mail.XML update functions) with their attributes, elements and complex types that are unique to these messages. **Namespace=mailxml_sc**

Copyright © 2016 USPS®. All Rights Reserved.

- **mailxml.xsd**: This module contains all the system messages with their attributes, elements and complex types that are unique to these messages. Note that in order for the MessageResponseRetrievalResponse to work all the other message modules are included by the system.xsd. **Namespace=mailxml**
- **mailxml_defs**.xsd: This module contains all the common definitions of attributes, elements and complex types that are used across one or more message types. **Namespace=mailxml_defs**
- **mailxml_base.xsd**: This module contains all the simple types that are used everywhere in the mailxml. These are simple types that are associated with every element of each message. **Namespace=mailxml_base**

1.5 What Schemas Cover FAST Functionality?

With the break-down of XSD into multiple schemas, the FAST functionality will be covered by mailxml_tm.xsd module.

In addition to the above modules, mailxml_base.xsd and mailxml_defs are common/shared XSD that will be referred by each of these individual FASTspecific modules.

Lastly mailxml.xsd module will be the source XSD that will connect all messages to their system level attributes. For example, MessageResponseRetrievalReponse is shared attribute/complex type associated to almost every single Mail.XML message regardless of whether it is a Data Distribution functionality or FAST or eDoc functionality. The other examples are DeliveryResponse, NotificationResponse, Fault, etc.

1.6 USPS® Limitation Rule on Transaction Requests

The Postal Service recommends that USPS Mail.XML customers update their Mail.XML software to query the USPS *PostalOne!*/FAST systems no more than seven times per hour. Similarly, USPS customers are required to set up their web services pull software to query the *PostalOne!* servers to no more than 200 times in a given 24 hour period for their eDoc, FAST, or Full Service related data queries. This change is required on the customer's end and will greatly assist in avoiding subsequent performance issues with different Mail.XML business transactions that can hinder quality of service, while at the same time allowing many opportunities to query necessary postal data. Similarly, in order to improve overall experience for all customers it is absolutely necessary that customers program their software to query the USPS systems for different transactions at different times, i.e., configure some queries to occur at odd times, e.g., FAST queries and configure other queries, e.g., eDoc and Data distribution to occur at even times.

1.7 USPS Asynchronous Transaction rule (24 Hour Rule) with Tracking IDs

USPS will start making a tracking ID (an Id generated in case there is a delay in giving a response back to the customer) stale after 24 hours of its generation. The customer needs to restart the transaction after 24 hours on non-response from the *PostalOne!* system for any of their FAST Mail.XML transactions.

1.8 Roadmap of Mail.XML

The table below shows versions of Mail.XML supported in each release.

July 2014 **Release 28**	**January 2015** **Release 30**	**May 2015** **Release 31**	**January 2016** **Release 32**	**January 2017** **Release 35**
Mail.XML 10.0 Mail.XML 12.0A Mail.XML 12.0B Mail.XML 14.0A	Mail.XML 10.0 Mail.XML 12.0A Mail.XML 12.0B Mail.XML 14.0A Mail.XML 16.0**	Mail.XML 10.0* Mail.XML 12.0A Mail.XML 12.0B Mail.XML 14.0A Mail.XML 16.0	Mail.XML 12.0A Mail.XML 12.0B Mail.XML 14.0A Mail.XML 16.0	Mail.XML 12.0A* Mail.XML 12.0B* Mail.XML 14.0A Mail.XML 16.0

Note: *The version(s) flagged with single asterisk (*) are version(s) being retired with the release date.*

Note: *The version(s) flagged with double asterisk (**) are new version(s) which are planned for implementation with the release date.*

The table below lists all Mail.XML FAST related messages supported in 14.0A and 16.0

Copyright © 2016 USPS®. All Rights Reserved.

Message Name	Mail.XML 14.0A	Mail.XML 16.0
AllApptCloseoutResponse	X	X
AllDeliveryApptCloseoutRequest	X	X
ConsigneeGoodsReceipt	X	X
CustomerSupplierAgreementQuery Request	X	X
CustomerSupplierAgreementQuery Response	X	X
DeliveryApptCancelCreateRequest	X	X
DeliveryApptCancelCreateResponse	X	X
DeliveryApptCancelRequest	X	X
DeliveryApptCancelResponse	X	X
DeliveryApptCreateRequest	X	X
DeliveryApptCreateResponse	X	X
DeliveryApptQueryRequest	X	X
DeliveryApptQueryResponse	X	X
DeliveryApptShellCancelRequest	X	X
DeliveryApptShellCancelResponse	X	X
DeliveryApptShellCreateRequest	X	X
DeliveryApptShellCreateResponse	X	X
DeliveryApptShellUpdateRequest	X	X
DeliveryApptShellUpdateResponse	X	X
DeliveryApptUpdateRequest	X	X
DeliveryApptUpdateResponse	X	X
DeliveryContentCancelRequest	X	X
DeliveryContentCancelResponse	X	X
DeliveryContentCreateRequest	X	X
DeliveryContentCreateResponse	X	X
DeliveryContentQueryRequest	X	X
DeliveryContentQueryResponse	X	X
DeliveryContentUpdateRequest	X	X
DeliveryContentUpdateResponse	X	X
MessageResponseRetrievalRequest	X	X
MessageResponseRetrievalResponse	X	X
PartnerApptQueryRequest	X	X
PartnerApptQueryResponse	X	X
RecurringApptQueryRequest	X	X
RecurringApptQueryResponse	X	X
UnscheduledConsigneeGoodsReceipt	X	X
StaleContentDelivery	X	X
StaleContentNotification	X	X
StateContentQueryRequest	X	X
StateContentQueryResponse	X	X
USPSDeliveryContentUpdatedDelivery	X	X
USPSDeliveryContentUpdatedNotification	X	X
USPSDeliveryContentUpdatedQueryRequest	X	X
USPSDeliveryContentUpdatedQueryResponse	X	X
PartnerContentAssignmentRequest	X	X
PartnerContentAssignmentResponse	X	X
AllApptCloseoutDelivery	X	X

Copyright © 2016 USPS®. All Rights Reserved.

AllApptCloseoutNotification	X	X

1.9 Purpose

The purpose of this Technical Specification is to supplement the IDEAlliance Mail.XML specification and to provide Mail.XML users with specific information regarding the USPS FAST implementation.

Facility Access and Shipment Tracking (FAST) is a USPS appointment scheduling system utilized by large volume customers to provide advanced notification (logistics and mail content) of mail induction. FAST appointments are required for drop shipments as well as full-service customer-transported origin entry mailings. Mailers can provide the logistics information and content high-level summary data via on-line FAST website and can use a combination of online FAST web site functionality or pure web service or web services with reference to the Mail.dat container information within the *PostalOne!* system to provide logistics as well as detail content information including the IM container barcodes to the FAST system. Those details are available in the FAST drop shipment and origin entry User guides available if users log in at https://fast.usps.com/fast/fastApp/resources/documentsDownload.action

This document focuses on the pure web services and web services in conjunction with reference to Mail.dat data available in the *PostalOne!* system.

Additionally, FAST leverages USPS enterprise systems to incorporate facility information, customer information, address information, and drop ship discounts processed at a corresponding USPS facility. While scheduling, FAST validates the advanced notification information provided by mailers against the "facility profile." Key operational validation questions include:

- Is the facility open and staffed to handle drop shipments?
- Does this facility accept/process the drop shipment discounted mail that is planned for induction?
- Does the volume of mail planned for induction exceed the facility's capacity?

Once the advance notification information is validated in FAST, this data is vital to the USPS for facility planning, dock utilization, yard management, and other operational activities.

PostalOne! FAST Web Services allow customers to leverage Mail.XML to integrate with FAST electronically. Messaging and business rules specific to FAST will be described in the following sections.

1.10 Intended Audience

The intended audience for this specification is technical programmers and technical managers. Prior knowledge of XML language, Mail.XML and Mail.dat functionalities will greatly improve the understanding of this document. The majority of the codes used in the Mail.XML base XSD come from the Mail.dat specification. The USPS recommends Mail.XML users to read Postal Service Mail.dat Technical Specification to better understand Mail.XML structure and functionalities.

1.11 About This Document

The data structure tables of FAST messages in Section 3 references many complex types. USPS recommends reviewing all complex types provided in the Appendix B to fully understand the structure of the FAST messages.

In the data structure table of FAST messages in Section 3 under the acceptable values column, actual simple type names are used for some of the elements. Review all simple types listed in Appendix B to fully understand the acceptable values that are validated by *PostalOne!* system. Appendix B shows the simple types for 14.0A. Note: The simple types listed here are consistent across all other USPS Mail.XML guides such as eDoc, Data Distribution.

In the Appendix B - each of the simple type uses codes are listed. In this version of the specification, the descriptions of those codes have been added for clarification. For more information, see the Postal Service Mail.dat Technical Specification document located on RIBBS® at: http://ribbs.usps.gov/index.cfm?page=intellmailguides

In the data structure tables of this document described in Section 5 through 8, some field names may contain spaces for readability purposes because the names of those fields are lengthy. In Mail.XML, spaces are not allowed in the element names. For example: "SubmittingParty" is the element name but in the data table it may have been written as Submitting Party". If you are using this document to code your software then use the latest version of Mail.XML XSD located on RIBBS® to fully understand the name of the elements, structure of every block and the structure of messages to minimize the impact of incorrect coding.

Copyright © 2016 USPS®. All Rights Reserved.

1.12 How to Read Data Structure

There are three possibilities for every element listed in the data structure table of each message. These possibilities are REQUIRED, OPTIONAL, and CONDITIONALLY REQUIRED. The Required option means that mailer/preparer or sender of the message must provide data for the element. The Optional option means the sender of the message has a choice to include the data or omit it from submission. The third option of Conditionally Required means that if certain condition is met then the sender of the message must provide data for that particular element; for example - EntryPointEDPostalCode is conditionally required if EntryPointEDFacilityType is populated in the ContainerUpdateRequest message.

In addition to the above options, there are instances where the main block is marked as REQUIRED but the elements within the block are OPTIONAL or vice versa. This means that the sender of the message must include the block when sending the message but can omit all elements within the block. A good example is the 'SubmittingParty' block which is a REQUIRED block but all elements within this block are OPTIONAL.

1.13 Issue Resolution

All issues identified in the USPS software that may not correspond with the business rules identified in this specification and require work-arounds are listed on critical issues list on the RIBBS Intelligent Mail site under Latest News. The current *PostalOne!* Critical Issues list is found at Intelligent Mail on the Latest News tab at:

http://ribbs.usps.gov/intelligentmail_latestnews/documents/tech_guides/PostalOneCriticalIssueExtCustomers.pdf

1.14 Environments Supported by USPS

The USPS supports a test and production environment

- **Testing Environment for Mailers (TEM)**: This environment is used for software approval processes for all mailers prior to moving into the production environment. Mailers must work with the *PostalOne!* Help Desk to start the approval process for their software, and must be approved in the TEM environment, prior to sending Mail.XML data transactions in the Production environment. The TEM environment for Mail.XML basic testing capabilities is available and will be available for all future releases. For more information regarding TEM, see the *Test Environment for Mailers: Checklist and Troubleshooting Guide*
- **Production Environment**: This Production environment will be used by all of those customers who have been approved by USPS to start sending messages and transactions. These customers will be approved because of performing required tests in the TEM environment. Customers will only receive production support for message types that they have completed testing in the TEM environment and for which they have received approval.

1.15 *PostalOne!* WSDL Information

All web services transactions that are made with the USPS should comply with the WSDL specification, which are posted on RIBBS® and can be downloaded from the following location:
http://ribbs.usps.gov/intelligentmail_guides/documents/tech_guides/xmlspec/wsdls/wsdls.htm

A web services request must include a valid and active USPS User ID and Password as defined in the UserAuthenticationInfo.xsd file that is provided as part of the WSDL files. A typical web service message construct defined is as follows:

```
<wsdl:message name="DeliveryApptContentUpdateRequest">

    <wsdl:part name="authInfo" element="auth:AuthenticationInfo"/>
    <wsdl:part name="apptContentUpdate" element="tns:apptContentUpdate"/>

</wsdl:message>
```

With the following:

XSD-typed WSDL:

```
<wsdl:message name="DeliveryApptContentUpdateRequest">

    <wsdl:part element="uspsmxml: DeliveryApptContentUpdateRequest"
    name="DeliveryApptContentUpdateRequest"/>

</wsdl:message>
```

USPS will validate and authenticate the user information before processing the request. An error message will be returned in response to the web service request for invalid user information.

Copyright © 2016 USPS®. All Rights Reserved.

1.16 Type of WSDLs

There are two types of WSDLs, the Message-Type WSDL and the String-Type WSDL. The USPS only supports the Message-Type WSDL. The following is basic information on the Message-Type WSDL types to help customers understand the Message Type WSDLs.

1.16.1 Consuming Message-Type WSDLs:

The message-type eliminates the need to manually register each service and message type. With this method, a customer can use an automated tool that can set up their environment without manually registering each service. However, this approach requires updates to WSDLs every time a new Mail.XML version is released. In other words, it is tightly coupled with the Mail.XML Specification Version. The USPS is transitioning to this type of Message WSDLs to remove manual editing and registering of messages.

The customer must use message-type URL to consume the services. These URLs are provided in the WSDL and XSDs section of this document.

1.17 Exceptions

Following is the list of exceptions identified by USPS.

Mail.XML Version	Exception Description
Recurring Contents	For recurring appointments, the schedulers update the Mail.dat with the recurring appointments and the *PostalOne!* system queries the *PostalOne!* Mail.dat database and pulls all the relevant information on content (i.e. container barcodes, class, shape, sort levels etc.), fills the USPSSummary block, and sends to the FAST system. Exception When the scheduler is updating content for recurring appointments through Mail.dat 09-1 updates, the *PostalOne!* system will populate AB, Z, and AP in the Pallets block, which is part of the USPSSummary block, and send to FAST when it finds AH, AI and AL CSM sort levels respectively. This specific solution is a workaround only for First-Class Mail pallets until the IDEAlliance fixes the specification and the USPS implements that fix in a later *PostalOne!*/FAST release
All	Mailers have the option to either provide a Mail.dat Summary block (when eDoc is submitted through Mail.dat to *PostalOne!*) OR an USPSSummary block to provide content information to the FAST system. The USPS is requesting that Mailers provide the Mail.dat Summary block, besides the USPS Summary block, each time an appointment's content is provided through a create or update transaction to help with easy location of containers within Mail.dat. This Mail.dat Summary block is 'not' required; if it is available, we request that mailers provide this block to the *PostalOne!*/FAST systems at all times in conjunction with the USPS Summary block for faster processing of data.

Copyright © 2016 USPS®. All Rights Reserved.

2. *PostalOne!* – FAST Mail.XML Web Services

2.1 Overview

The USPS requires appointment scheduling for drop shipped mail at USPS facilities for better resource planning and service performance. The USPS FAST (Facilities Access and Shipment Tracking) system is the business process engine that provides mailers with the capabilities to schedule appointments.

2.2 Access to *PostalOne!* - FAST Web Services

To gain initial access to FAST, a mail owner or mailing agent must request a business account and request the FAST service through the Business Customer Gateway. The gateway performs all authentication and authorization services for FAST and *PostalOne!* systems.

Briefly for those customers registering for FAST Web Services, in order to complete the registration process, the company for which the customer registers, must be assigned to a *PostalOne!* FAST hierarchy. If the company for which a customer is applying for access is not currently using FAST, the user must create a new corporation to allow the company to serve as the headquarters/corporate office in the new gateway system. If a user needs to associate the company to an existing corporation in *PostalOne!* FAST, the existing corporation using that corporation's Customer Registration ID (CRID) must be located to be assigned to a *PostalOne!* FAST hierarchy. The FAST application will take over the hierarchy process from the *PostalOne! system*.

For detailed information on gaining access to FAST, refer to section 3.6 of Facility Access & Shipment Tracking (FAST), *PostalOne!* Hierarchy of User Access to Electronic Mailing Information & Reports Guide posted on the Rapid Information Bulletin Board System – RIBBS - http://ribbs.usps.gov/index.cfm?page=intellmailguides.

Utilizing the IDEAlliance Mail.XML Specification and *Postal One!*/FAST Web Services, where the *PostalOne!* system works as the data exchange gateway for the appointment transactions and passes the appointment and container detail information, including IM Container barcode, class, shape, piece count, weight, zone skipping, mail owner information and many other content characteristics to the FAST system and all messages to and from the customer pass through the *PostalOne!* system. The *PostalOne!* system can also be leveraged in this usage scenario to pull existing content (container detail) information from a previously provided Mail.dat job sent by a customer or business partner of a customer. The customer can either send all the content details directly to FAST through the *PostalOne!*/FAST Web Services mechanism or can request the *PostalOne!* system to query and provide all or part of the content details to FAST through the *PostalOne!* FAST Web Services mechanism.

The Full-Service program requires customers to use the IDEAlliance Mail.XML messages and *PostalOne!*/FAST Web Services to create and/or update appointments within the FAST system for one-time appointments. One-time appointments created through the online FAST application **must be updated electronically** through Mail.XML with the Intelligent Mail Container Barcode (IMcb) to receive full-service discounts.

2.3 *PostalOne!* - FAST Mail.XML Web Services Supported Messages

Mail.XML versions 14.0A and 16.0 are currently supported.

The next section lists the workflow for most common messages that will be supported.

2.4 FAST Workflows for Mail.XML

This section lists most common messages associated with the FAST workflow. This is not a complete list, but provides basic information regarding FAST messages

2.4.1 Create One-Time Appointment (Single Entity Scheduling)

For Origin and Destination Entry Transporter /Mail Owner /Mail preparer

To determine Slot Availability

Submit – DeliveryApptQueryRequest

→Receive – DeliveryApptQueryResponse

Transporter /Mail Owner /Mail preparer

To create appointment based on Slot Availability

Submit – DeliveryApptCreateRequest

→Receive -- DeliveryApptCreateResponse

Copyright © 2016 USPS®. All Rights Reserved.

Input - Appointment ID in eDoc and PS Form 8125/8017 (If using Mail.XML, customer does not need to update the eDocumentation, i.e., Mail.dat container summary data) (Documentation updates are only supported for recurring appointments and are not supported for one-time appointments.)

2.4.2 Manage One Time Appointment (Single Entity Scheduling)

For Origin and Destination Entry Transporter /Mail Owner /Mail preparer

Submit – DeliveryApptUpdateRequest

→Receive – DeliveryApptUpdateResponse

1. **Cancel One time Appointment (Single Entity Scheduling) – For Origin and Destination Entry**

Transporter /Mail Owner /Mail preparer

Submit – DeliveryApptCancelRequest

4. →Receive – DeliveryApptUpdateResponse with ConfirmationID

2.4.3 Updating a Recurring Appointment Instance (Single Entity Scheduling)

For Origin and Destination Entry Transporter /Mail Owner /Mail preparer

1. Submit – DeliveryApptUpdateRequest with ConsigneeID=12345RMMDD (MMDD is the Month and Date of the Appointment)

5. →Receive – DeliveryApptUpdateResponse

Input – Appointment ID in eDoc and PS Form8125/8017 (If using Mail.XML, customer does not need to update this)

NOTE: 12345 is the recurring appointment sequence

2.4.4 Retrieving CSA Data

Scenario#1 Request CSA by CSAID

Submit – CSAQueryRequest

→Receive – CSAQueryResponse Based on CSAID

Scenario#2 Request CSA by CRID

Submit – CSAQueryRequest

→Receive – CSAQueryResponse with All CSAs associated to CRID

2.4.5 Partner Appointment Query

Scenario#1 - Scheduler delegates a third party to query data for one time appointment

Submit – PartnerApptQueryRequest with Submitting Party data = Third Party and HeaderInfo = Scheduler Info

→Receive – PartnerApptQueryResponse with all information of appointment

Scenario#2 – Mail Owner delegates a third party to query data for one time appointment

Mail Owner

Submit – PartnerApptQueryRequest
with Submitting Party data = Third Party and HeaderInfo=Mail Owner Info
→Receive – PartnerApptQueryResponse with information pertaining to Mail Owner only

Scenario#3 - Mail Preparer delegates a third party to query data for one time appointment

Mail Preparer

Submit – PartnerApptQueryRequest
with Submitting Party data = Third Party and HeaderInfo = Mail Preparer Info
→Receive – PartnerApptQueryResponse with information pertaining to Mail Preparer only

2.4.6 Scheduler wants to update only logistics information

(No change in content and single entity scheduling)

Scheduler:

Copyright © 2016 USPS®. All Rights Reserved.

Submit – DeliveryApptShellUpdateRequest
→Receive – DeliveryApptShellUpdateResponse

2.4.7 Receiving Closeout Information

USPS Closesout Appointment

FAST generates ConsigneeGoodsReceipt for Scheduled Appointments and sends it to the *PostalOne! system.*
FAST generates UnscheduledConsigneeGoodsReceipt for Unscheduled Appointments and sends it to the *PostalOne! system.*

Submit – AllApptCloseoutRequest

→Receive – All ConsigneeGoodsReceipt and UnscheduledConsigneeGoodsReceipt for all appointments via AllApptCloseoutResponse

2.4.8 One-Time Appointment and Joint Scheduling

Scenario #1: Create Process

Transporter

Manages only logistics
Submit – Transporter submits DeliveryApptShellCreateRequest
→Receive – Transporter receives DeliveryApptShellCreateResponse with Appointment ID
Transporter provides Appointment ID /Consignee ID to Mail Owner1/Mail Owner2 and Mail Preparer2

Mail Owner1

Submit -- DeliveryContentCreateRequest with Appointment ID
→Receive –DeliveryContentCreateResponse

Mail Owner2

Submit – DeliveryContentCreateRequest with Appointment ID
→ Receive –DeliveryContentCreateResponse

Mail Preparer1

Submit –DeliveryContentCreateRequest with ConsigneeAppointment ID

→Receive –DeliveryContentCreateResponse

Transporter

Transporter wants to understand contents associated to appointment

Submit –DeliveryContentQueryRequest

→Receive –DeliveryContentQueryResponse with all details of appointments

NOTE: FAST sends notification via emails to Transporter with each update to appointment

Scenario#2: Update Process

Mail Owner1

Submit –DeliveryContentUpdateRequest

→Receive –DeliveryContentUpdateResponse

NOTE: FAST sends notification via emails to Transporter of updated content information.

Scenario#3: Cancel Process

Mail Preparer1 - wants to cancel

Submit –DeliveryContentCancelRequest

→Receive –DeliveryContentCancelResponse

NOTE: FAST sends notification via emails to Transporter of cancellation.

2.4.9 Standalone content and Joint Scheduling

Copyright © 2016 USPS®. All Rights Reserved.

Scenario #1: Transporter uses FAST online to link Content to a new or existing appointment.

Mail Owner1

Submit – DeliveryContentCreateRequest specifying Transporter and Induction Date
→Receive -- DeliveryContentCreateResponse

NOTE: FAST sends notification via email to Transporter

Scenario #2: Transporter uses Mail.XML to link Content.

Mail Owner/Mail Preparer creates content while identifying the transporter

Submit –DeliveryContentCreateRequest specifying Transporter and Induction facility

→Receive DeliveryContentCreateResponse

Mail Owner/Mail Preparer provides FAST ContentID to Transporter – Transporter links content to the appointment

Submit –DeliveryApptCreateRequest with FAST ContentID
→Receive DeliveryApptCreateResponse

NOTE: FAST sends email notification to Mail Owner/Mail Preparer of Content Association to Appointment

Submit -- Mail Owner/Mail Preparer submits DeliveryContentQueryRequest to obtain Appointment ID

2.4.10 Recurring Appointments and Joint Scheduling (Pure Periodicals)

Scenario # 1: Pure Periodicals Drop Shipments

Transporter

Submit –DeliveryApptShellCreateRequest
→Receive –DeliveryApptShellCreateResponse

Transporter notifies Mail Owner1 the Recurring Appointment Sequence ID

Mail Owner1

Submit –DeliveryContentCreateRequest with Recurring Appointment Sequence ID

→Receive –DeliveryContentCreateResponse

NOTE: FAST auto approves Recurring Appointments.

Mail Owner2

Submit –DeliveryContentCreateRequest with Recurring Appointment Sequence ID

→Receive –receives DeliveryContentCreateResponse

Transporter

Submit –RecurringApptQueryRequest using the Recurring Appt Sequence ID
→Receive – Transporter receives RecurringApptQueryResponse with all details of the recurring appointments

- FAST creates instances 21 days in advance of effective start date
- Transporter uses DeliveryApptUpdateRequest to update instances and receives DeliveryApptUpdateResponse (See 2.4.3 - Updating a Recurring Appointment Instance)

Scenario # 2: Recurring Appointments and Joint Scheduling (USPS Marketable Mail/Packaged Services/ Mixed Mail Class)

Transporter

Submit –DeliveryApptShellCreateRequest
→Receive –DeliveryApptShellCreateResponse

Transporter notifies Mail Owner1 Recurring Appt Sequence ID

USPS /FAST

Copyright © 2016 USPS®. All Rights Reserved.

- Notification is sent to facility for review and approval.
- USPS Facility approves Recurring Appointments.
- Notification is sent to Transporter/ Mail Owner/ Mail Preparer of approval.

Transporter

- Transporter uses DeliveryAppUpdateRequest to update instances and receives DeliveryApptUpdateResponse (See 2.4.3 - Updating a Recurring Appointment Instance)

Scenario # 3: (Additional Mail Preparer added to an active recurring appointment) Mail Preparer1

Submits --DeliveryContentCreateRequest with Recurring Appointment Sequence ID

→Receives – DeliveryContentCreateResponse

USPS/FAST

- Notification is sent to facility for review and approval.
- USPS Facility approves Recurring Appointments.
- Notification is sent to Transporter/ Mail Owner/ Mail Preparer of approval.

Transporter

- Transporter uses DeliveryApptUpdateRequest to update instances and receives DeliveryApptUpdateResponse (See 2.4.3 - Updating a Recurring Appointment Instance)
- FAST creates instances 14 days in advance of effective start date

2.4.11 MessageRetrieval Request/Response

a. **Transporter /Mail Owner /Mail Preparer**

   Submit – Any FAST messages

b. ***PostalOne!*** *system*

   The PostalOne! system generates TrackingID

c. **Transporter /Mail Owner /Mail Preparer**

   Submit --MessageRetrievalRequest for TrackingID
   →Receive – MessageRetrievalResponse for the corresponding message

2.4.12 Create a Parcel Return Service Appointment

Transporter

Submit – DeliveryApptShellCreateRequest, with Comment field set to “APPTTYPPRS”

→Receive – DeliveryApptShellCreateResponse

2.4.13 Update a Parcel Return Service Appointment

Transporter

Submit – DeliveryApptShellUpdateRequest, with Comment field set to “APPTTYPPRS” and AppointmentID = the AppointmentID received in the DeliveryApptShellCreateResponse

→Receive – DeliveryApptShellUpdateResponse

2.5 Mail.dat Transportation Updates for Recurring Appointments

For recurring appointments, customers have an option to provide their contents for Full-Service compliance to FAST system through *PostalOne!* Mail.dat Transportation updates. Mail.dat Transportation updates are only available for eDoc filed through Mail.dat and for the recurring appointments that were created through Mail.XML.

1. Customers must provide all of the following fields in Mail.dat CSM file:
   a. SequenceID. This is a 6-byte field and is composed of five numeric values followed by hard letter ‘R’, which signify recurring appointments e.g. 23567R

Copyright © 2016 USPS®. All Rights Reserved.

b. ‘Reservation Number' field. This is the FAST appointment ID (Consignee Appointment ID) which customer receives when they schedule appointment through FAST online or through Mail.XML using DeliveryApptCreateRequest or DeliveryApptShellCreateRequest.

c. ‘Scheduled Induction Date' field. This is the planned appointment date that was scheduled by the customer through FAST online or Mail.XML at the time of appointment creation.

d. 'FAST Content ID' field. This is associated with the recurring appointment in the FAST system. The FAST Content ID is a nine digit numeric field, which can be obtained either through the FAST online system or via Mail.XML through the RecurringApptQueryRequest. Similar to the FAST Recurring Sequence, the FAST Content ID is static.

2. The appointment information needs to match the actual delivery of mail. Once received by the *PostalOne!* system, this IMcb and presort data is sent to the FAST system. If FAST rejects the transaction, the error is not reported back to the *PostalOne!* system or to the customer. The customer must log on to FAST online system to verify if the contents have been successfully associated with the recurring appointment.

2.6 Data Structure: AllDeliveryApptCloseoutRequest

Field	Format	Acceptable Values	Business Rules	Comment
AllDeliveryApptCloseoutRequest				
StatusRequestByTimeMsgHeaderInfoBegins			Attributes block	
SchedulerID	String, 12 characters		Required	
SchedulerCorpID	String, 12 characters		Required	
CreatorSchedulerCorpID	String, 12 characters		Required	
CreatorSchedulerID	String, 12 characters		Optional	
Start	Datetime	YYYY-MM-DDTHH:MM:SS	Optional	
End	Datetime	YYYY-MM-DDTHH:MM:SS	Optional	
StatusRequestByTimeMsgHeaderInfo ends				
SubmittingParty	mailxml:participantIDType		Required block; Identifies the customer submitting the message	Refer to ‘participantIDType’ complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Identifies the software submitting the message	Refer to ‘SubmittingSoftware ‘ complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

3. Mail.XML 14.0A Messages - FAST Message and Data Structures

This section lists the details of all messages that have been either changed from the previous supported versions or have been newly added to the list of supported messages.

3.1 DeliveryApptShellCreateRequest

The purpose of this message is to allow creation of Recurring appointment Shell or One-time Appointment Shells without the actual content associated with the appointment. Parcel Return Service appointments can be created using a custom String in the Comment field (see below).

Mail.XML 14.0A - DeliveryApptShellCreateRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptShellCreateRequest BEGINS				
RequestMsgHeaderInfo	requestMsgHeaderInfo attribute block		Attributes block	Refer to Appendix A for details on this attribute
SubmittingParty	mailxml:participantIDType		Required block; Identifies the customer submitting the message	Refer to 'participantIDType' complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Identifies the software submitting the message	Refer to 'submittingSoftwareType' complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	mailxml: ConsigneeFacility Type		Required	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This is a Boolean type simple type
MailClass	mailxml: MailClassType	Refer to 'mailClassType' simple type	Required 1 to many allowed	Refer to 'Appendix B'
Choice Block BEGINS			Either RecurringAppt block data or OneTImeAppt block is required	
RecurringAppt	mailxml:RecuringApptType		Required	Refer to 'RecurringApptType' complex type in Appendix A
OneTimeAppt	mailxml: OneTimeApptType		Required	Refer to 'OneTimeApptType' complex type in Appendix A
Choice Block ENDS				
TrailerInfo	mailxml: TrailerInfo Type		Optional	Refer to 'TrailerInfo' complex type in Appendix A
Comment	String, 256 characters		Optional	Set to 'APPTTYPPRS' to create a Parcel Return Service

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptShellCreateRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
				appointment
ValueAddedService	String		Optional	Refer to this simple type in Appendix B
DeliveryApptShellCreateRequest ENDS				

3.2 DeliveryApptShellCreateResponse

This is a response message for DeliveryApptShellCreateRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Mail.XML 14.0A - DeliveryApptShellCreateResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptShellCreateResponse message BEGINS				
TrackingID	String 20	-	OPTIONAL Tracking ID allows users to re-query using this ID	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either Accept block or Reject block is returned.	
DeliveryApptShellCreateAccept	mailxml: DeliveryApptShellAcceptType		Required	Refer to 'DeliveryApptShellAcceptType' complex type in Appendix A
DeliveryApptShellCreateReject	mailxml: DeliveryApptShellRejectType		Required	Refer to 'DeliveryApptShellRejectType' complex type in Appendix A
Choice Block ENDS				
DeliveryApptShellCreateResponse message ENDS				

3.3 DeliveryApptShellUpdateRequest

The purpose of this message is to allow FAST users to update the existing Recurring or One Time appointment shells or appointment logistics information. Parcel Return Service appointments can be updated using a custom String in the Comment field (see below).

Mail.XML 14.0A - DeliveryApptShellUpdateRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptShellUpdate Request BEGINS				
RequestMsgHeaderInfo	requestMsgHeaderInfo attribute block		Attributes block	Refer to Appendix A for details on this attribute

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptShellUpdateRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
SubmittingParty	mailxml:participantID Type		Required block; Identifies the customer submitting the message	Refer to 'participantIDType' complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Identifies the software submitting the message	Refer to 'submittingSoftwareType' complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	mailxml: ConsigneeFacility Type		Required	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship
MailClass	mailxml: MailClassType	Refer to 'mailClassType' simple type	Required 1 to many allowed	Refer to 'Appendix B'
Choice Block BEGINS			Either RecurringAppt block data or OneTImeAppt block is required	
RecurringAppt	mailxml:RecuringAppt Type		Required	Refer to 'RecurringApptType' complex type in Appendix A
OneTimeAppt	mailxml: OneTimeApptType		Required	Refer to 'OneTimeApptType' complex type in Appendix A
Choice Block ENDS				
TrailerInfo	mailxml: TrailerInfo Type		Optional	Refer to 'TrailerInfo' complex type in Appendix A
Comment	String, 256 characters		Optional	Set to 'APPTTYPPRS' to create a Parcel Return Service appointment
ValueAddedService	String		Optional	Refer to this simple type in Appendix B
DeliveryApptShellUpdate Request ENDS				

3.4 DeliveryApptShellUpdateResponse

This is a response message for DeliveryApptShellUpdateRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptShellUpdateResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptShellUpdateResponse message BEGINS				
TrackingID	String 20	-	OPTIONAL Tracking ID allows users to re-query using this ID	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either Accept block or Reject block is returned.	
DeliveryApptShellAccept	mailxml: DeliveryApptShellAcceptType		Required	Refer to 'DeliveryApptShellAcceptType' complex type in Appendix A
DeliveryApptShellReject	mailxml: DeliveryApptShellRejectType		Required	Refer to 'DeliveryApptShellRejectType' complex type in Appendix A
Choice Block ENDS				
DeliveryApptShellUpdateResponse message ENDS				

3.5 DeliveryApptShellCancelRequest

The purpose of this message is to allow FAST users to cancel an existing appointment shell, which could be one-time, or recurring shell appointment. The user must send all required fields data in a message to cancel an appointment shell.

Mail.XML 14.0A - DeliveryApptShellCancelRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptShellCancelRequest BEGINS				
RequestMsgHeaderInfo Begins	requestMsgHeaderInfo attribute block		Attributes block	Refer to Appendix A for details on this attribute
SubmittingParty	mailxml:participantIDType		Required block; Identifies the customer submitting the message	Refer to 'participantIDType' complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Required Identifies the software submitting the message	Refer to 'submittingSoftwareType' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship
ReturnInfo	optReturnInfoType		Required	Refer to this complex

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptShellCancelRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
	complex type			type in Appendix A
DeliveryApptShellCancelRequest ENDS				

3.6 DeliveryApptShellCancelResponse

This is a response message for DeliveryApptShellCancelRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Mail.XML 14.0A - DeliveryApptShellCancelResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptShellCancelResponse message BEGINS				
TrackingID	String 20	-	OPTIONAL Tracking ID allows users to re-query using this ID	-
Choice Block BEGINS			Either Accept block or Reject block is returned.	
DeliveryApptCancelAccept Block BEGINS				
ResponseMsgHeaderInfo	ResponseMsgHeaderInfo attribute block		Attributes block	Refer to Appendix A for details on this attribute
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship
DeliveryApptCancelAccept Block ENDS				
DeliveryApptCancelReject Block BEGINS				
ResponseMsgHeaderInfo	ResponseMsgHeaderInfo attribute block		Attributes block	Refer to Appendix A for details on this attribute
Sequence Block BEGINS				
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship
ReturnInfo	ReturnInfoType complex type		Required	Refer to this complex type in Appendix A
Sequence Block ENDS				
DeliveryApptCancelReject Block ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptShellCancelResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
Choice Block ENDS				
DeliveryApptShellCancelResponse message ENDS				

3.7 DeliveryContentCreateRequest

The purpose of this message is to allow the FAST user to create a content detail for their shipment. The user must submit this message with all required data elements filled with actual and correct data.
Please be aware that mailers must create eInduction contents separate from non eInduction contents, else every barcode (IMcb) pallet identified under the eInduction content will be marked for eInduction processing and will be expected to have eDocs and unique IMcbs.

Mail.XML 14.0A - DeliveryContentCreateRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentCreateRequest BEGINS				
DeliveryContentHeaderInfo	DeliveryContentHeaderInfo attribute block		Attributes block	Refer to this attribute block in Appendix A
SubmittingParty	mailxml:participantIDType		Required block; Identifies the customer submitting the message	Refer to 'participantIDType' complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Required Identifies the software submitting the message	Refer to 'SubmittingSoftware ' complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	mailxml: ConsigneeFacilityType		Optional	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship
ContentDetailInfo	ContentDetailInfoType complex type		Required 1 to many allowed	Refer to 'ContentDetailInfo' complex type in Appendix A
DeliveryContentCreateRequest ENDS				

3.8 DeliveryContentCreateResponse

This is a response message for DeliveryContentCreateRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Mail.XML 14.0A - DeliveryContentCreateResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryContentCreateResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentCreateResponseBEGINS				
TrackingID	String 20	-	Tracking ID provide users with the flexibility to requery the message.	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either accept or reject block is returned.	
DeliveryContentAccept	DeliveryContentAcceptType complex type	-	Required when the DeliveryContentCreateRequest message has been accepted	Refer to this complex type in Appendix A
DeliveryContentReject	DeliveryContentRejectType complex type	-	Required when DeliveryContentCreateRequest is rejected	Refer to this complex type in Appendix A
Choice Block ENDS				
DeliveryContentCreateResponseENDS				

3.9 DeliveryContentUpdateRequest

The purpose of this message is to provide the ability to update FAST content. Additionally, Intelligent Mail Barcodes may be added/updated/removed from MLOCR Origin Entry content up to 5 days past the appointment date/time. Drop ship content and other content information can be updated past the Consignee Editable Threshold.

Please be aware that mailers must create eInduction contents separate from non eInduction contents, else every barcode (IMcb) pallet identified under the eInduction content will be marked for eInduction processing and will be expected to have eDocs and unique IMcbs.

Mail.XML 14.0A - DeliveryContentUpdateRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentUpdateRequest BEGINS				
DeliveryContentUpdateHeaderInfo attribute block	DeliveryContentUpdateHeaderInfo attribute block		Attributes block	Refer to this attribute block in Appendix A
SubmittingParty	mailxml:participantIDType		Required block; Identifies the customer submitting the message	Refer to ‘participantIDType’ complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Required Identifies the software submitting the message	Refer to ‘SubmittingSoftware ‘ complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	mailxml: ConsigneeFacilityType		Optional	Refer to ‘ConsigneeFacility’ complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This field allows mailers to specify

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryContentUpdateRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
				whether the mail is origin entered or drop ship
ContentDetailInfoUpdate	ContentDetailInfoUpdateType complex type		Required 1 to many allowed	Refer to this complex type in Appendix A
DeliveryContentUpdateRequest ENDS				

3.10 DeliveryContentUpdateResponse

This is a response message for DeliveryContentUpdateRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Mail.XML 14.0A - DeliveryContentUpdateResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentUpdateResponse BEGINS				
TrackingID	String 20	-	Tracking ID provide users with the flexibility to requery the message.	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either accept or reject block is returned.	
DeliveryContentUpdateAccept	DeliveryContentUpdateAcceptType complex type	-	Required when the DeliveryContentCreateRequest message has been accepted	Refer to this complex type in Appendix A
DeliveryContentUpdateReject	DeliveryContentUpdateRejectType complex type	-	Required when DeliveryContentCreateRequest is rejected	Refer to this complex type in Appendix A
Choice Block ENDS				
DeliveryContentUpdateResponse ENDS				

3.11 DeliveryContentQueryRequest

The purpose of this message is to query the existing Delivery Content data. The user should provide all required field elements to be able to pull the data.

Mail.XML 14.0A - DeliveryContentQueryRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentQueryRequest BEGINS				
DeliveryContentQueryMsgHeaderInfo attribute block	DeliveryContentQueryMsgHeaderInfo attribute block		Attributes block	Refer to this attribute block in Appendix A
SubmittingParty	mailxml:participantID		Required block;	Refer to

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryContentQueryRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
	Type		Identifies the customer submitting the message	'participantIDType' complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Required. Identifies the software submitting the message	Refer to 'SubmittingSoftware ' complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	ConsigneeFacilityType complex type		Optional	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	yesNo simple type	Either Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship
DeliveryContentQuery Request ENDS				

3.12 DeliveryContentQueryResponse

This is a response message for DeliveryContentQueryRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Query Results Block and Query Error Block. If the query request is successful then a data is returned through Query Result block and if an error is occurred then a Query Error block is returned.

Mail.XML 14.0A - DeliveryContentQueryResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentQuery Response BEGINS				
DeliveryContentQuery MsgHeaderInfo	DeliveryContentQuery MsgHeaderInfo attribute block		Attributes block	Refer to this attribute block in Appendix A
TrackingID	String 20	-	Tracking ID provide users with the flexibility to requery the message.	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either QueryResult or QueryError block is returned.	
QueryResult block BEGINS			Required block when data is found and sent back to the requestor	
ConsigneeFacility	mailxml: ConsigneeFacilityType		Optional	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Either Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryContentQueryResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ContentDetailInfoUpdate	ContentDetailInfoUpdateType complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
QueryResult block ENDS				
QueryError Block BEGINS			Required block when error occurs	
ReturnInfo	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
QueryError block ENDS				
Choice Block ENDS				
DeliveryContentQueryResponse ENDS				

3.13 DeliveryContentCancelRequest

The purpose of this message is to allow FAST users to cancel a FAST Content data. The user should send all required field elements in the message to be able to successfully cancel the existing content data.

Mail.XML 14.0A - DeliveryContentCancelRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentCancelRequest BEGINS				
Attribute block BEGINS				
SchedulerID	String 12	-	Optional	-
SchedulerCorpID	String 12	-	Optional	-
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
Attribute Block ENDS				
SubmittingParty	mailxml:participantIDType		Required block; Identifies the customer submitting the message	Refer to ‘participantIDType’ complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Required. Identifies the software submitting the message	Refer to ‘SubmittingSoftware ‘ complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This field allows mailers to specify whether the mail is origin entered or drop ship
ContentCancel	contentCancelType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
DeliveryContentCancelRequest ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

3.14 DeliveryContentCancelResponse

This is a response message for DeliveryContentCancelRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Mail.XML 14.0A - DeliveryContentCancelResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentCancelResponse BEGINS				
TrackingID	String 20	-	Tracking ID provide users with the flexibility to requery the message.	-
Choice Block BEGINS			Either accept or reject block is returned.	
DeliveryContentCancelAccept Block BEGINS			Required block when request message is accepted	
DeliveryContentHeaderInfoCancel Attribute block	DeliveryContentHeaderInfoCancel attribute block	-	Attribute block	Refer to this attribute in Appendix A
Sequence Block BEGINS			Required. 1 to many allowed	
DestinationEntry	Mailxml_base:yesNo	Yes or No allowed	-	This field allows mailers to specify whether the mail is origin entered or drop ship
ContentCancel	contentCancelType complex type	-	Required	Refer to this complex type in Appendix A
Sequence Block ENDS				
DeliveryContentCancelAccept Block ENDS				
DeliveryContentCancelReject Block BEGINS				
DeliveryContentHeaderInfoCancel Attribute block	DeliveryContentHeaderInfoCancel attribute block	-	Attribute block	Refer to this attribute in Appendix A
Sequence block BEGINS			Required 1 to many allowed	
DestinationEntry	Mailxml_base:yesNo	Yes or No allowed	-	This field allows mailers to specify whether the mail is origin entered or drop ship
ContentCancel	contentCancelType complex type	-	Required	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
Sequence Block ENDS				
DeliveryContentCanc				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryContentCancelResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
elReject Block ENDS				
Choice Block ENDS				
DeliveryContentCancelResponse ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

3.15 RecurringApptQueryRequest

This message provides the ability to query in FAST:

- Active and pending drop ship recurring appointments based on status
- Active First-Class DMU/BMEU verified customer transported appointments

Mail.XML 14.0A - RecurringApptQueryRequest				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
RecurringApptQueryRequest BEGINS				
RecurringApptQueryRequestHeaderInfo	RecurringApptQueryRequestHeaderInfo attribute block	-	Attributes block	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Required	Refer to this attribute block in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Required. Identifies the software submitting the message	Refer to this attribute block in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	ConsigneeFacilityType complex type		Optional 0 to many allowed	Refer to this attribute block in Appendix A
RecurringApptQueryRequest ENDS				

3.16 RecurringApptQueryResponse

This purpose of this message is to provide the ability to query in FAST for the recurring appointment information by sequence for both drop ship and active origin entry DMU/BMEU verified customer transported appointments

Mail.XML 14.0A - RecurringApptQueryResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
RecurringApptQueryResponse BEGINS				
TrackingID	String 20	-	Optional Tracking ID allow users to requery a message without constructing a whole request message.	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either QueryResults or QueryError block is returned.	
QueryResults begins			Required	
RecurringApptBlock	RecurringApptBlockT		Required	Refer to this complex

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - RecurringApptQueryResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
	ype complex type		1 to many allowed	type in Appendix A
ReturnInfo	basicReturnInfoType complex type		Optional	Refer to this complex type in Appendix A
QueryResults ends				
QueryError	returnInfoType complex type		Required	Refer to this complex type in Appendix A
Choice Block ENDS				
RecurringApptQueryResponse BEGINS				

3.17 ConsigneeGoodsReceipt

This message provides the ability to send closeout information to *PostalOne!* - The visibility data for scheduled appointments from FAST.

Mail.XML 14.0A - ConsigneeGoodsReceipt				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ConsigneeGoodsReceipt BEGINS				
ResponseMsgHeaderInfo Attribute block	ResponseMsgHeaderInfo Attribute block		Attributes block	Refer to this attribute in Appendix A
ApptBlockGoodsReceipt	apptBlockGoodsType complex type	-	Required	Refer to this complex type in Appendix A
DetailInfo	DetailInfo Type complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	TrailerInfo Type complex type		Optional	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type		Optional	Refer to this complex type in Appendix A
ConsigneeGoodsReceipt ENDS				

3.18 ConsigneeGoodsReceiptDelivery

The user must be subscribed to automatically receive the ConsigeeGoodsReceipt data pushed from USPS servers to customers server.

Mail.XML 14.0A - ConsigneeGoodsReceiptDelivery				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ConsigneeGoodsReceiptDelivery BEGINS				
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
DataRecipient Block BEGINS			Optional Block. If provided then user must provide both CRID and Role	

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - ConsigneeGoodsReceiptDelivery				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
			elements data.	
CRID	CRIDType simple type	-	Required when block data is provided.	Refer to this simple type in Appendix B
Role	roleType simple type	-	Required when block data is provided.	Refer to this simple type in Appendix B
DataRecipient Block ENDS				
Choice Block BEGINS			Required	
Sequence Block # 1 BEGINS			Either UserLicenseCode and MaildatJobID is required OR customergroupID and MailingGroupID is required	
UserLicenseCode	userLicenseCodeTyp e complex type	-	Required	Refer to this complex type in Appendix A
MaildatJobID	jobIDType complex type	-	Required	Refer to this complex type in Appendix A
Sequence Block # 1 ENDS				
Sequence Block # 2 BEGINS				
CustomerGroupID	String 25	-	Required	-
MailingGroupID	nonNegativeInteger	-	Required	-
Sequence Block # 2 ENDS				
PushMessageID	String 25	-	Optional	-
Sequence Block # 3 BEGINS				
ApptBlockGoodsRece ipt	apptBlockGoodsType complex type	-	Required	Refer to this complex type in Appendix A
DetailInfo	DetailInfo Type complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	TrailerInfo Type complex type		Optional	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type		Optional	Refer to this complex type in Appendix A
Sequence Block # 3 ENDS				
ConsigneeGoodsRec eiptDelivery ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

3.19 DeliveryApptCancelCreateRequest

This message provides the ability in FAST to cancel one or multiple appointments and create an appointment in one transaction. The main reason for this message is to release containers from one appointment (cancelled) and assign to a new appointment when the threshold to make changes or cancel appointments has been surpassed.

Mail.XML 14.0A - DeliveryApptCancelCreateRequest				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptCancelCreateRequest BEGINS				
CancelCreateMsg HeaderInfo	CancelCreateMsg HeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
SubmitterTracking ID	String 20		Required	
DestinationEntry	yesNo simple type	Yes or No	Required	This field allows mailers to specify whether the mailing is origin entered or drop ship.
ApptCancel Block BEGINS			Required. 1 to many allowed	
ConsigneeApptID (as Attribute)	String 12	-	Required	-
ReturnInfo	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
ApptCancel Block ENDS				
ApptBlock	apptBlockRequest Type complex type	-	Required	Refer to this complex type in Appendix A
DetailInfo	DetailInfo Type complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	TrailerInfo Type complex type		Optional	Refer to this complex type in Appendix A
DeliveryApptCancelCreateRequest ENDS				

3.20 DeliveryApptCancelCreateResponse

Mail.XML 14.0A - DeliveryApptCancelCreateResponse				
Field	Format	Acceptable Values	Business Rules	Comment

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptCancelCreateResponse				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptCancelCreateResponse BEGINS				
TrackingID	String 20	-	Optional	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS	-	-	Required 1 to many	-
ReturnInfo	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
ApptCancel block BEGINS	-	-	Required	-
ConsigneeApptID (as Attribute)	String 12	-	Required	-
ApptCancel block ENDS				
Choice Block ENDS				
Choice Block BEGINS			Required Choice block	-
DeliveryApptAccept	deliveryApptAcceptType complex type	-	Required	Refer to this complex type in Appendix A
DeliveryApptReject	deliveryApptRejectType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
DeliveryApptCancelCreateResponse ENDS				

3.21 DeliveryApptCreateRequest

This message is intended to be used when one business entity is going to schedule the appointment. This message provides the ability to create in FAST:

- Drop ship appointments for all Mail Classes
- Customer Transported origin entry appointments (First-Class Mail, USPS Marketable Mail Mail, Periodicals, and Package Services).
- Appointments for all mail classes - both Origin Entry and Destination Entry
- One time and recurring appointments

Please be aware that mailers must create eInduction contents separate from non eInduction contents, else every barcode (IMcb) pallet identified under the eInduction content will be marked for eInduction processing and will be expected to have eDocs and unique IMcbs.

Mail.XML 14.0A - DeliveryApptCreateRequest

Copyright © 2016 USPS®. All Rights Reserved.

Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptCreateRequest BEGINS				
RequestMsgHeaderInfo	RequestMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
DestinationEntry	yesNo simple type	-	Required	This field allows mailers to specify whether mail is origin entry or drop ship mail.
Choice Block BEGINS			Required. Either recurringAppt block or oneTimeAppt block is required	
RecurringAppt	recurringApptType complex type	-	Required	Refer to this complex type in Appendix A
oneTimeApp	oneTimeApptType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
DetailInfo	DetailInfo Type complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	TrailerInfo Type complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeFacility	consigneeacilityType complex type	-	Required	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
ValueAddedService	String		Optional	Refer to this simple type in Appendix B
DeliveryApptCreateRequest ENDS				

3.22 DeliveryApptCreateResponse

This is a response message for DeliveryApptCreateRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptCreateResponse				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptCreateResponse BEGINS				
TrackingID	String 20	-	Optional	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Required choice block either Accept or Reject block will be returned.	-
DeliveryApptCreateAccept	deliveryApptAcceptType complex type	-	Required	Refer to this complex type in Appendix A
DeliveryApptCreateReject	deliveryApptRejectType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
DeliveryApptCreateResponse ENDS				

3.23 DeliveryApptUpdate

Mail.XML 14.0A - DeliveryApptUpdate				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptUpdate BEGINS				
ResponseApptUpdateMsgHeaderInfo	ResponseApptUpdateMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
ApptBlockUpdate	apptBlockUpdateType complex type		Required	Refer to this complex type in Appendix A
DetailInfo	DetailInfoType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	trailerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
DeliveryApptUpdate ENDS				

3.24 DeliveryApptUpdateRequest

This message provides the ability to update in FAST:

- Drop ship appointments for all mail classes

Copyright © 2016 USPS®. All Rights Reserved.

- Customer Transported Origin Entry appointments (First-Class Mail, USPS Marketable Mail, Periodicals, and Package Services).
- One time and recurring appointments

Please be aware that mailers must create eInduction contents separate from non eInduction contents, else every barcode (IMcb) pallet identified under the eInduction content will be marked for eInduction processing and will be expected to have eDocs and unique IMcbs.

Mail.XML 14.0A - DeliveryApptUpdateRequest				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptUpdateRequest BEGINS				
ResponseApptUpdateMsgHeaderInfo	ResponseApptUpdateMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
DestinationEntry	yesNo simple type	Either Yes or No	Required	This allows mailers to specify whether the mailing is origin entered or drop ship.
Choice Block BEGINS			Required. Either recurringAppt block or oneTimeAppt block is required	
RecurringAppt	recurringApptType complex type	-	Required	Refer to this complex type in Appendix A
oneTimeApp	oneTimeApptType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
DetailInfo	DetailInfo Type complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	TrailerInfo Type complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeFacility	consigneeacilityType complex type	-	Required	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
ETA	dateTime	YYYY-MM-DDTHH:MM:SS	Optional	-

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptUpdateRequest				
Field	Format	Acceptable Values	Business Rules	Comment
ValueAddedService	String		Optional	Refer to this simple type in Appendix B
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
DeliveryApptUpdateRequest ENDS				

3.25 DeliveryApptUpdateResponse

This is a response message for DeliveryApptUpdateRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. Accept Block and Reject Block. When a request message is accepted – the Accept block is returned with relevant data and when a request message is rejected then a Reject block is returned with error code and description to help user/mailer to correct the issue and resend the request.

Mail.XML 14.0A - DeliveryApptUpdateResponse				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptUpdateResponse BEGINS				
TrackingID	String 20	-	Optional	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Required choice block; either accept or reject block is returned.	-
DeliveryApptUpdateAccept	deliveryApptUpdateAcceptType complex type	-	Required	Refer to this complex type in Appendix A
DeliveryApptCreateReject	deliveryApptUpdateRejectType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
DeliveryApptUpdateResponse ENDS				

3.26 DeliveryApptQueryRequest

This message provides the ability to query in FAST:

- The availability of slots for drop ship appointments
- The availability of slots at 10 minute interval (based on hours of operation) for Origin Entry appointments (First-Class Mail, USPS Marketable Mail, Periodicals, and Package Services)
- The availability of slots for one time and recurring appointments

Mail.XML 14.0A - DeliveryApptQueryRequest

Copyright © 2016 USPS®. All Rights Reserved.

Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptQueryRequest BEGINS				
RequestMsgHeaderInfo	RequestMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
DestinationEntry	yesNo simple type	Either Yes or No	Required	This field allows mailers to specify whether the mailing is origin entered or drop ship.
Choice Block BEGINS			Required. one of the following block is required: recurringAppt block or oneTimeAppt block or SlotAvailability block	
RecurringAppt	recurringApptType complex type	-	Required	Refer to this complex type in Appendix A
oneTimeApp	oneTimeApptType complex type	-	Required	Refer to this complex type in Appendix A
SlotAvailability	slotAvailabilityType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
DetailInfo	DetailInfo Type complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	TrailerInfo Type complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeFacility	consigneeFacility Type complex type	-	Required	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
DeliveryApptQueryRequest ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

3.27 DeliveryApptQueryResponse

This is a response message for DeliveryApptQueryRequest, which is sent by USPS to requestor servers. This message has two major blocks i.e. QueryResult and QueryError. When a request message is accepted – the QueryResult is returned with relevant data and when a request message results in error then a QueryError is returned with error code and description to help user/mailer to correct the issue and resend the request.

Mail.XML 14.0A - DeliveryApptQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptQueryResponse BEGINS				
RequestMsgHeaderInfo	RequestMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
TrackingID	String 20	-	Optional	-
SubmitterTrackingID	String 20		Required	
QueryResult block BEGINS			Required block	-
DestinationEntry	yesNo simple type	Either Yes or No	Required	This field allows mailers to specify whether the mailing is origin entered or drop ship.
Choice Block BEGINS			Required. one of the following blocks is returned: recurringAppt or oneTimeAppt or SlotAvailability block	-
RecurringAppt	recurringApptType complex type	-	Required	Refer to this complex type in Appendix A
OneTimeAppt	oneTimeApptType complex type	-	Required	Refer to this complex type in Appendix A
SlotAvailability	slotAvailabilityType complex type	-	Required	Refer to this complex type in Appendix A
Choice block ENDS				
DetailInfo	DetailInfoType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
trailerInfo	trailerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeFacility	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
AvailableSlot	availableSlotType complex type	-	Optional	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryApptQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
QueryResult block ENDS				
QueryError block BEGINS				
ReturnInfo	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
QueryError block ENDS				
DeliveryApptQueryResponse ENDS				

3.28 DeliveryApptCancelRequest

This message provides the ability to cancel appointments in FAST:

- Drop ship appointments for all mail classes
- Customer Transported Origin Entry appointments (First-Class Mail, USPS Marketable Mail, Periodicals, and Package Services).
- One time and recurring appointments

Mail.XML 14.0A - DeliveryApptCancelRequest				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryApptCancelRequest				
ResponseMsgHeaderInfo	ResponseMsgHeaderInfo attribute block	-	Attributes block	Refer to this attribute block in Appendix A
SubmittingParty	mailxml:participantIDType		Required block; Identifies the customer submitting the message	Refer to 'participantIDType' complex type in Appendix A
SubmittingSoftware	mailxml:submittingSoftwareType		Required. Identifies the software submitting the message	Refer to 'SubmittingSoftware ' complex type in Appendix A
SubmitterTrackingID	String 20		Required	
DestinationEntry	yesNo	Either Yes or No	-	Allows mailers to specify the mail as origin entered or drop ship.
ReturnInfo	optReturnInfoType		Optional	Refer to this complex type in Appendix D

Copyright © 2016 USPS®. All Rights Reserved.

3.29 DeliveryApptCancelResponse

This message provides the ability to cancel in FAST:

For cancellation, acceptance or rejection information in the ReturnInfo Block

Mail.XML 14.0A - DeliveryApptCancelResponse				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptCancelResponse BEGINS				
TrackingID	String 20	-	Optional	Allow users to use it for re-query
SubmitterTrackingID	String 20		Required	
DeliveryApptCancelAccept	ResponseMsgHeaderInfo attribute block	-	Either Accept or Reject block	Refer to this attribute block in Appendix A
DeliveryApptCancelReject BEGINS				
ResponseMsgHeaderInfo	ResponseMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
ReturnInfo	mailxml: ReturnInfo Type		Required	Refer to 'ReturnInfo' complex type in Appendix A
DeliveryApptUpdateReject ENDS				
DeliveryApptCancelResponse ENDS				

3.30 DeliveryReApptRequest

Mail.XML 14.0A - DeliveryReApptRequest				
Field	Format	Acceptable Values	Business Rules	Comment
DeliveryReApptRequest BEGINS				
ResponseMsgHeaderInfo	ResponseMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ApptBlock	apptBlockRequestType complex type		Required	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - DeliveryReApptRequest				
Field	Format	Acceptable Values	Business Rules	Comment
DetailInfo	DetailInfoType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	trailerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
ValueAddedService	String		Optional	Refer to this simple type in Appendix B
DeliveryReApptRequest ENDS				

3.31 PartnerApptQueryRequest

This message provides the ability to query the FAST appointment and content information on behalf of partner mailers for drop ship and Origin Entry one-time appointments. Additionally, it provides following functionalities:

- Ability to identify business entities by CRID
- Ability to flag contents as being Full-Service contents
- Ability to query Origin Entry contents on drop ship appointments
- PartnerApptQueryRequest can utilize either ConsigneeApptID or the date range.
- PartnerApptQueryRequest will not require the ConsigneeApptID element.
- The FAST system shall require and limit one week of date range at a time for the PartnerApptQueryRequest to allow partners to query their data whether they are the owner, preparer, or content creator of the content.

Mail.XML 14.0A - PartnerApptQueryRequest				
Field	Format	Acceptable Values	Business Rules	Comment
PartnerApptQueryRequest BEGINS				
PartnerApptRequestHeaderInfo	PartnerApptRequestHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
PartnerApptQueryRequest ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

3.32 PartnerApptQueryResponse

This message is in response to PartnerApptQueryRequest. Based on the profile of submitter , the appropriate appointment information is returned back to submitter. If none information is available or an error has occurred during the date retrieval process then QueryError block is returned.

Mail.XML 14.0A - PartnerApptQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
PartnerApptQueryResponse BEGINS				
PartnerApptRequestHeaderInfo	PartnerApptRequestHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
TrackingID	String 20	-	Optional. Allows the requestor to requery the message using tracking id if a data is not returned in timely manner or an error has occurred during the transaction exchange.	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS	-	-	Either Query Result or QueryError block will be returned.	-
QueryResults Block BEGINS	-	-	-	-
Sequence Block BEGINS	-	-	Optional but 0 to many allowed	-
ApptBlock	partnerApptBlockType complex type	-	Required	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
QueryResult Block ENDS				
QueryError Block BEGINS				
ReturnInfo	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
QueryError Block ENDS				
Choice Block ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - PartnerApptQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
PartnerApptQueryResponse ENDS				

3.33 UnscheduledConsigneeGoodsReceipt

This message provides the ability to request in FAST the visibility data for unscheduled one time appointments for Drop Shipments only

Mail.XML 14.0A - UnscheduledConsigneeGoodsReceipt				
Field	Format	Acceptable Values	Business Rules	Comment
UnscheduledConsigneeGoodsReceipt BEGINS				
UnscheduledResponseMsgHeaderInfo	UnscheduledResponseMsgHeaderInfo Attribute Block	-	Attributes block	Refer to this attribute block in Appendix A
ApptBlockUnscheduledGoodsReceipt	apptBlockUnscheduledGoodsType complex type	-	Required	Refer to this complex type in Appendix A
DetailInfo	detailInfoType complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	trailerInfoType complex type		Optional	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type		Optional	Refer to this complex type in Appendix A
UnscheduledConsigneeGoodsReceipt ENDS				

3.34 AllDeliveryApptCloseoutRequest

This message provides the ability to request for closeout information

- AllDeliveryApptCloseoutRequest can now be used by any business entity, (i.e., Scheduler, Owner, or Preparer of mail) to get their closeout data from FAST if they were identified as a Scheduler, Preparer, or Owner as part of the appointment scheduling process. On Mail.XML v14.0A messages, the *PostalOne!* system will only look at the CRID or SchedulerID in the SubmittingParty block for authorization of data and closeout response.
- On Mail.XML v14.0A '*AllDeliveryApptCloseoutRequest*' Message processing has been enhanced to support LTB(Large Transaction Block) on the Closeout Response. The *PostalOne!* system will receive '*ConsigneeGoodsReceipt*' receipts and '*UnscheduledConsigneeGoodsReceipt*' from FAST. The *PostalOne!* system will retrieve '*ConsigneeGoodsReceipt*' and '*UnscheduledConsigneeGoodsReceipt*' based CRID or SchedulerID provided on the SubmittingParty block. To comply with the mailxml_tm xsd definition, the *PostalOne!* system will add two new elements to the response, trackingID and LargeTransactionDividerResult to handle large amounts of closeout data. The LargeTransactionDividerResult element will have one or more tracking IDs based on the amount of data. If there is more than one, mailer will have to parse out the other tracking IDs and use MessageResponseRetrievalRequest to retrieve the other responses.
- Mail.XML v14.0A 'AllDeliveryApptCloseoutRequest' with Date Range (Start, End) provided on the request will match date range provided with 'ScheduledAppt' to retrieve 'ConsigneeGoodsReceipt', and 'ActualTruckArrival'

Copyright © 2016 USPS®. All Rights Reserved.

to retrieve 'UnscheduledConsigneeGoodsReceipt' . If the Start and End date parameters are not provided, the system will provide all of the available and unrequested data.

Mail.XML 14.0A - AllDeliveryApptCloseoutRequest				
Field	Format	Acceptable Values	Business Rules	Comment
AllDeliveryApptCloseoutRequest BEGINS				
StatusRequestByTimeMsgHeaderInfo	StatusRequestByTimeMsgHeaderInfo attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
AllDeliveryApptCloseoutRequest ENDS				

3.35 AllApptCloseoutResponse

Mail.XML 14.0A - AllApptCloseoutResponse				
Field	Format	Acceptable Values	Business Rules	Comment
AllApptCloseoutResponse BEGINS				
LargeTransactionDividerGroupOptionalType	LargeTransactionDividerGroupOptionalType attribute block	-	Required attribute block	Refer to this attribute block in Appendix A
TrackingID	String 20	-	Optional	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either AllDeliveryApptCloseoutAccept or AllDeliveryApptCloseoutReject block is returned	-
AllDeliveryApptCloseoutAccept block BEGINS			Required block	-
StatusRequestMsgHeaderInfo	StatusRequestMsgHeaderInfo attribute block	-	Required attribute block	Refer to this attribute block in Appendix A
Sequence Block BEGINS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - AllApptCloseoutResponse				
Field	Format	Acceptable Values	Business Rules	Comment
ConsigneeGoods Receipt	This is an element block	-	Optional 0 to many allowed	Refer to "ConsigneeGoods Receipt" message in Section 5 for details.
UnscheduledCons igeeGoodsReceipt	This is an element block	-	Optional 0 to many allowed	Refer to "UnscheduledCon signeeGoodsRece ipt" message in Section 5 for details.
Sequence Block ENDS				
AllDeliveryApptCl oseoutAccept block ENDS				
AllDeliveryApptCl oseoutReject block BEGINS				
StatusRequestMs gHeaderInfo	StatusRequestMs gHeaderInfo attribute block	-	Required attribute block	Refer to this attribute block in Appendix A
ReturnInfo	basicReturnInfo complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
AllDeliveryApptCl oseoutReject block ENDS				
AllApptCloseoutR esponse ENDS				

3.36 AllApptCloseoutNotification

This is an automatic notification from USPS to customers informing them that the closeout data is ready to be picked up.

Mail.XML 14.0A - AllApptCloseoutNotification				
Field	Format	Acceptable Values	Business Rules	Comment
AllApptCloseoutN otification BEGINS				
SubmittingParty	participantIDType complex type	-	Optional	Refer to this complex type in Appendix A
SubmittingSoftwar e	submittingSoftwar eType complex type	-	Optional	Refer to this complex type in Appendix A
CRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - AllApptCloseoutNotification				
Field	Format	Acceptable Values	Business Rules	Comment
PushMessageID	String 25	-	Optional	-
Choice block BEGINS			Optional Choice Block. If data is provided then either Sequence Block # 1 or #2 data is sent to mailers.	
Sequence Block # 1 BEGINS				
UserLicenseCode	userLicensceCodeType simple type	-	Required	Refer to this simple type in Appendix B
MaildatJobID	jobIDType simple type	-	Required	Refer to this simple type in Appendix B
Sequence Block # 1 ENDS				
Sequence Block # 2 BEGINS				
CustomerGroupID	String 25	-	Optional	-
MailingGroupID	nonNegativeInteger	-	Required	-
Sequence Block # 2 ENDS				
Choice block ENDS				
NotificationDate	Date	-	Required	-
AllApptCloseoutNotification ENDS				

3.37 AllApptCloseoutDelivery

This is an automatic Delivery from USPS to customers with all of the closeout data.

Mail.XML 14.0A - AllApptCloseoutDelivery				
Field	Format	Acceptable Values	Business Rules	Comment
AllApptCloseoutDelivery BEGINS				
LargeTransactionDividerGroupOptionalType	LargeTransactionDividerGroupOptionalType attribute	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type	-	Optional	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Optional	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - AllApptCloseoutDelivery				
Field	Format	Acceptable Values	Business Rules	Comment
DataRecipient Block BEGINS			Optional. If provided – it should contain CRID and Role data	
CRID	CRIDType simple type	-	Required	Refer to this simple type in Appendix B
Role	roleType simple type	-	Required	Refer to this simple type in Appendix B
DataRecipient Block ENDS				
Choice block BEGINS			Optional Choice Block. If data is provided then either Sequence Block # 1 or #2 data is sent to mailers.	
Sequence Block # 1 BEGINS				
UserLicenseCode	userLicensceCodeType simple type	-	Required	Refer to this simple type in Appendix B
MaildatJobID	jobIDType simple type	-	Required	Refer to this simple type in Appendix B
Sequence Block # 1 ENDS				
Sequence Block # 2 BEGINS				
CustomerGroupID	String 25	-	Optional	-
MailingGroupID	nonNegativeInteger	-	Required	-
Sequence Block # 2 ENDS				
Choice block ENDS				
PushMessageID	String 25	-	Optional	-
FullServiceAllApptCloseoutAccept	allDeliveryApptCloseoutAcceptType complex type	-	Required 1 to many allowed.	Refer to this complex type in Appendix A
AllApptCloseoutDelivery ENDS				

3.38 CustomerSupplierAgreementQueryRequest

This message provides the ability to query in FAST :

- Customer / Supplier Agreements via Web Services when a CRID or CSA ID is provided
- For valid requests, FAST will provide the appropriate CSA data, else an error would be generated. This request could result in one or more CSA responses

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - CustomerSupplierAgreementQueryRequest				
Field	Format	Acceptable Values	Business Rules	Comment
CustomerSupplier AgreementQuery Request BEGINS				
CustomerSupplier AgreementQuery MsgHeaderInfo	CustomerSupplier AgreementQuery MsgHeaderInfo attribute block		Required attribute block	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Required block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftwar e	submittingSoftwar eType complex type		Required. Identifies the software submitting the message	Refer to this complex type in Appendix A
SubmitterTracking ID	String 20		Required	
CustomerSupplier AgreementQuery Request ENDS				

3.39 CustomerSupplierAgreementQueryResponse

This is a response message to CustomerSupplierAgremeentQueryRequest message which will contain all CSA information associated either to CSA ID or all CSAs associated with the CRID

Mail.XML 14.0A - CustomerSupplierAgreementQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
CustomerSupplier AgreementQuery Response BEGINS				
CustomerSupplier AgreementQuery MsgHeaderInfo	CustomerSupplier AgreementQuery MsgHeaderInfo Attribute block		Attributes block	Refer to this attribute block in Appendix A
TrackingID	String 20	-	Optional. Provides requestor with the ability to requery the message without constructing the actual query request message	-
SubmitterTracking ID	String 20		Required	

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - CustomerSupplierAgreementQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
Choice Block BEGINS			Either QueryResult or QueryError block is returns	
QueryResults begins			Required	
CSAInfo	csaInfoType complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A
QueryResults ends				
QueryError	QueryErrorType complex type		Required	Refer to this complex type in Appendix A
Choice Block ENDS				
CustomerSupplier AgreementQuery Response ENDS				

3.40 StaleContentQueryRequest

The purpose of this message is to allow FAST users to query the *PostalOne!*/FAST systems to determine stand-alone contents which exist without appointment linkage after a certain period.

Mail.XML 14.0A - StaleContentQueryRequest				
Field	Format	Acceptable Values	Business Rules	Comment
StaleContentQueryRequest BEGINS				
DeliveryContentQueryMsgHeaderInfo	DeliveryContentQueryMsgHeaderInfo attribute block		Required attribute block	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Required block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Required. Identifies the software submitting the message	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - StaleContentQueryRequest				
Field	Format	Acceptable Values	Business Rules	Comment
DestinationEntry	Mailxml_base:yesNo	Only yes or no allowed	Required	Allows mailers to specify the mail as origin entered or drop ship.
NumberOfDaysStale	Numeric String 2	-	Optional	Allow users to query based on number of days stale rather than query the whole PO! database for FAST stale content data
StaleContentQueryRequest ENDS				

3.41 StaleContentQueryResponse

This is a response message to StaleContentQueryRequest message. This message returns content details if any stale content is available to return to the content creator. If an error occurs or no record is returned out of the request message then a QueryError block is returned.

Mail.XML 14.0A - StaleContentQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
StaleContentQueryResponse BEGINS				
DeliveryContentQueryMsgHeaderInfo	DeliveryContentQueryMsgHeaderInfo attribute block		Required attribute block	Refer to this attribute block in Appendix A
TrackingID	String 20	-	Optional. Allow the user to retrieve the data without requery the message by providing the trackingID in MRRR message.	-
SubmitterTrackingID	String 20		Required	
Choice Block BEGINS			Either QueryResult or QueryError block is returned	
QueryResult block BEGINS				
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only yes or no allowed	Required	Allows mailers to specify the mail as origin entered or drop ship.

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - StaleContentQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
ContentDetailInfo	contentDetailInfoType complex type	-	Required 1 to many	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
QueryResult Block ENDS				
QueryError Block	QueryErrorType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
StaleContentQueryResponse ENDS				

3.42 StaleContentNotification

This is an automatic message sent by USPS to the customer's server notifying them that Stale Content exists for them to review and take appropriate action. If user has also subscribed to StaleContentDelivery message then they will get the details of the stale content, else the user needs to construct StaleQueryRequest message to pull the data.

Mail.XML 14.0A - StaleContentNotification				
Field	Format	Acceptable Values	Business Rules	Comment
StaleContentNotification BEGINS				
DeliveryContentHeaderInfo	DeliveryContentHeaderInfo attribute block		Required attribute block	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Optional block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Optional. Identifies the software submitting the message	Refer to this complex type in Appendix A
PushMessageID	String 25	-	Optional	-
NotificationDate	Date	-	Required	-
StaleContentNotificationElement	staleContentNotificationElementType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
StaleContentQueryNotification ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

3.43 StaleContentDelivery

This is an automatic message sent from USPS to customer's server with the actual stale content detail data, which exists in the FAST system without an appointment.

Mail.XML 14.0A - StaleContentDelivery				
Field	Format	Acceptable Values	Business Rules	Comment
StaleContentDelivery BEGINS				
DeliveryContentHeaderInfo	DeliveryContentHeaderInfo attribute block		Required attribute block	Refer to this attribute block in Appendix A
LargeTransactionDividerGroupOptionalType	LargeTransactionDividerGroupOptionalType attribute block	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Optional block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Optional. Identifies the software submitting the message	Refer to this complex type in Appendix A
DataRecipient block BEGINS			Optional Block. If provided then it must include both CRID and role.	
CRID	CRIDType simple type	-	Required	Refer to this complex type in Appendix A
Role	roleType simple type		Required	Refer to this complex type in Appendix A
DataRecipient block ENDS				
PushMessageID	String 25	-	Optional	-
DeliverySummary	deliverySummaryType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
StaleContentDelivery ENDS				

3.44 USPSDeliveryContentUpdatedQueryRequest

The purpose of this message is to allow schedulers to query the USPS Delivery content that has been updated by content providers on the Schedulers appointments.

Mail.XML 14.0A - USPSDeliveryContentUpdatedQueryRequest				
Field	Format	Acceptable Values	Business Rules	Comment
USPSDeliveryContentUpdatedQueryRequest BEGINS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - USPSDeliveryContentUpdatedQueryRequest				
Field	Format	Acceptable Values	Business Rules	Comment
MailXMLHeaderInfo	MailXMLHeaderInfo attribute		Required attribute block	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Required block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Required. Identifies the software submitting the message	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
DestinationEntry	yesNo simple type	Yes or No	Required	Allows mailers to specify whether mail is origin entered or drop ship.
USPSDeliveryContentUpdatedQueryParameters	DeliveryContentQueryMsgHeaderInfo Attribute block	-	Required 1 to many allowed	Refer to this attribute block in Appendix A
USPSDeliveryContentUpdatedQueryRequest ENDS				

3.45 USPSDeliveryContentUpdatedQueryResponse

This message is in response to USPSDeliveryContentUpdateQueryRequest message where actual delivery content data is sent back to the requestor when content with updated information data is found in the FAST system else QueryError result block is sent back with Error code and error description.

Mail.XML 14.0A - USPSDeliveryContentUpdatedQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
USPSDeliveryContentUpdatedQueryResponse BEGINS				
MailXMLHeaderInfo	MailXMLHeaderInfo attribute		Required attribute block	Refer to this attribute block in Appendix A
TrackingID	String 20	-	Optional. This allows the users to retrieve the data without requery by using this ID in the MRRR message.	-
SubmitterTrackingID	String 20		Required	

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - USPSDeliveryContentUpdatedQueryResponse				
Field	Format	Acceptable Values	Business Rules	Comment
canlChoice Block BEGINS				
QueryResult block BEGINS				
LargeTransactionDividerGroupOptionalType	LargeTransactionDividerGroupOptionalType attribute	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Required block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Required. Identifies the software submitting the message	Refer to this complex type in Appendix A
DeliveryContentUpdated	deliveryContentUpdatedType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
QueryResult block ENDS				
QueryError Block BEGINS				
ReturnInfo	basicReturnInfoType complex type	-	Required	Refer to this complex type in Appendix A
QueryError block ENDS				
Choice block ENDS				
USPSDeliveryContentUpdatedQueryResponse ENDS				

3.46 USPSDeliveryContentUpdatedNotification

This is an automatic message sent by USPS to the customer's server notifying them of the availability of DeliveryContenUpdated data for them to review and take appropriate action. If user has also subscribed to Delivery message then they will get the details of the updated content, by content provider, else the user needs to construct QueryRequest message to pull the data. User shall usually subscribe to either Notification OR Delivery messages (recommended).

Mail.XML 14.0A - USPSDeliveryContentUpdatedNotification				
Field	Format	Acceptable Values	Business Rules	Comment
USPSDeliveryContentUpdatedNotification BEGINS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - USPSDeliveryContentUpdatedNotification				
Field	Format	Acceptable Values	Business Rules	Comment
SubmittingParty	participantIDType complex type		Optional block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Optional. Identifies the software submitting the message	Refer to this complex type in Appendix A
DataRecipient block BEGINS			Optional block. If provided then both CRID and Role are required.	
CRID	CRIDType simple type		Required	Refer to this simple type in Appendix B
Role	roleType simple type		Required	Refer to this simple type in Appendix B
Data Recipient block ENDS				
PushMessageID	String 25	-	Optional	-
NotificationDate	Date	-	Required	-
NotificationSummary	USPSDeliveryContentUpdatedNotificationMsgHeaderInfo attribute	-	Required 1 to many allowed	Refer to the attribute block in Appendix A. The notification summary basically provides the deliveryContentQueryMsgHeaderInfo information.
USPSDeliveryContentUpdatedNotification ENDS				

3.47 USPSDeliveryContentUpdatedDelivery

This is an automatic message sent from USPS to customer's server with the actual delivery content detail data updated by the content provider. The idea is to let the Scheduler know that the content of their appointment has changed, e.g., pallet count, weight etc.

Mail.XML 14.0A - USPSDeliveryContentUpdatedDelivery				
Field	Format	Acceptable Values	Business Rules	Comment
USPSDeliveryContentUpdatedDelivery BEGINS				
LargeTransactionDividerGroupOptionalType	LargeTransactionDividerGroupOptionalType attribute	-	Required	Refer to this attribute block in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - USPSDeliveryContentUpdatedDelivery				
Field	Format	Acceptable Values	Business Rules	Comment
SubmittingParty	participantIDType complex type		Optional block; Identifies the customer submitting the message	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type		Optional. Identifies the software submitting the message	Refer to this complex type in Appendix A
DataRecipient block BEGINS			Optional block. If provided then both CRID and Role are required.	
CRID	CRIDType simple type		Required	Refer to this simple type in Appendix B
Role	roleType simple type		Required	Refer to this simple type in Appendix B
Data Recipient block ENDS				
PushMessageID	String 25	-	Optional	-
DeliveryContentUpdated	deliveryContentUpdatedType complex type	-	Required 1 to many allowed	Refer to the attribute block in Appendix A.
USPSDeliveryContentUpdatedDelivery ENDS				

3.48 PartnerContentAssignmentRequest

This message allows the Mail Owner, Mail Preparer, Consolidator, and Scheduler to assign the content of the mail to another business entity. For example, content is created by Consolidator A and assigned to LTL B. The LTL B then assigns the content to LTL C through this message.

Mail.XML 14.0A - PartnerContentAssignmentRequest				
Field	Format	Acceptable Values	Business Rules	Comment
PartnerContentAssignmentRequest BEGINS				
ContentAssignmentRequestMsgHeaderInfo	ContentAssignmentRequestMsgHeaderInfo attribute	-	Required	Refer to this attribute block in Appendix A
SubmittingParty	participantIDType complex type		Required block; Identifies the customer submitting the message	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - PartnerContentAssignmentRequest				
Field	Format	Acceptable Values	Business Rules	Comment
SubmittingSoftware	submittingSoftwareType complex type		Required block; Identifies the software submitting the message	Refer to this complex type in Appendix A
SubmitterTrackingID	String 20		Required	
CurrentPartnerOwner	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
PartnerContentAssignedTo	partnerContentAssignmentType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
PartnerContentAssignmentRequest ENDS				

3.49 PartnerContentAssignmentResponse

This message is in response to PartnerContentAssignementRequest message. If Request message is accepted – the accept block is returned else reject block is returned in this message.

Mail.XML 14.0A - PartnerContentAssignmentResponse				
Field	Format	Acceptable Values	Business Rules	Comment
PartnerContentAssignmentResponse BEGINS				
TrackingID	String 20	-	Optional element; This allows the users to retrieve the data without requery by using this ID in the MRRR message.	-
SubmitterTrackingID	String 20		Required	
Ca Choice Block BEGINS	-	-	Either accept or reject block is returned.	-
PartnerContentAssignmentAccepted block BEGINS	-	-	Required 1 to many allowed	-
PartnerIdentifier	participantIDType complex type		Required	Refer to this complex type in Appendix A
ConsigneeContentID	String 12	-	Required 1 to many allowed	-
DestinationEntry	yesNo	Yes or No	Required	Allows mailers to specify whether the mail is origin entered or drop ship.

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - PartnerContentAssignmentResponse				
Field	Format	Acceptable Values	Business Rules	Comment
PartnerContentAssignmentAcceptedblock ENDS				
PartnerContentAssignmentRejected	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
PartnerContentAssignmentResponse ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

4. Additional information

4.1 Additional Rules/Constraints

The following section outlines the specific rules and constraints for USPS implementation. For additional details regarding the calculations used for Appointment Rating, online supported functionality vs. Web Services supported functionality, etc., please refer to the *FAST User Guide*.

- A mailer must submit an appointment using the facility's local time (taking time zone and daylight savings into consideration) and FAST will respond using the same logic.
- A mailer can make use of two new files, the BMEU Entry and CET (Critical Entry Time) files, to identify the Locale Key of a BMEU office and the Critical Entry times at a plant by class and shape respectively. These files are in conjunction with the address file's facility name and Zip Code. These files are available under http://fast.usps.com -> Resources -> Drop Ship Product File Download section.
- The following outlines the list of possible values for Appointment Types, Mail Classes, Processing Categories, Presort Levels, and Rate Types for the Delivery Appointment Query Request, Delivery Appointment Create Request and Delivery Appointment Update Request. Also included in the Presort list is a breakdown of whether the content tied to that Presort is treated as Working or Cross Dock content for volume availability calculations.

Appointment Type (apptTypeType)		
Code	**Description**	**Supported?**
1	Pallet	Yes
2	DropAndPick	Yes
3	Speedline	Yes
4	Bedload	Yes

Mail Class (mailClassType)		
Code	**Description**	**Supported?**
1	First-Class Mail	Yes
2	Periodicals	Yes
3	USPS Marketable Mail	Yes
4	Packaged Services	Yes
6	USPS Marketable Mail/Periodicals Co-Mailings	Yes*

***NOTE**: * USPS Marketable Mail/Periodicals Co-Mailings content will be processed by FAST as USPS Marketable Mail content. Currently, the PostalOne! system does not support Co-Mailing Class "6" due to postage implications. As a result, the PostalOne! system will not populate Mail Class "6" from Mail.dat files into the internal PostalOne! to FAST XML specification for recurring appointments because files with that mail class of six (6) will fail validation.*

Processing Category (processingCategoryType)		
Code	**Description**	**Supported?**
LT	Letter	Yes
FL	Flat	Yes
CD	Card	Yes*
PF	Parcel, First-Class Mail	Yes
MP	Machineable Parcel	Yes
IR	Irregular Parcel	Yes
OS	Outside Parcel	Yes
CM	Custom Mail	No
NA	Not Flat-Machinable < 6oz	Yes

Copyright © 2016 USPS®. All Rights Reserved.

Processing Category (processingCategoryType)		
Code	**Description**	**Supported?**
NB	Not Flat-Machinable >= 6oz	Yes
NP	Non Machinable Parcels	Yes

***NOTE**: Processing Category of "CD" ("Card") is translated to "LT" ("Letter") for volume availability.*

PreSort Types (containerLevelType)			
Code	**Description**	**Supported?**	**Type**
A	CR-Direct	Yes	Cross Dock
B	Mixed CR in 5 Digit	Yes	Cross Dock
C	Mixed CR in 3 Digit	Yes	Working
D	CR – 5D Scheme	Yes	Cross Dock
E	DPC/3D Scheme	No	N/A
F	RDC/Scheme	No	N/A
G	5 Digit (Auto/Presort)	Yes	Working
H	5 Digit (Merged)	Yes	Working
I	5 Digit (Presort Only)	Yes	Working
J	5 Digit (Barcode Only)	Yes	Working
K	Metro Scheme	Yes	Working
L	Mixed RDC	No	N/A
M	5D Scheme (Presort)	Yes	Cross Dock
N	5D Scheme (Auto/Presort)	Yes	Cross Dock
P	5D Scheme (Barcode)	Yes	Cross Dock
Q	5D Scheme (Merged)	Yes	Cross Dock
R	3 Digit (Auto/Presort)	Yes	Working
S	3 Digit (Barcode)	Yes	Working
T	3 Digit (Presort)	Yes	Working
U	3 Digit (CR/Auto/Presort)	Yes	Working
V	3 Digit Scheme	Yes	Working
W	TBD	No	Working
X	SCF	Yes	Working
Y	Protected SCF	Yes	Working
Z	ADC	Yes	Working
AA	AADC	Yes	Working
AB	Mixed ADC	Yes	Working
AC	Mixed AADC	Yes	Working
AD	ASF	Yes	Working
AE	NDC (BMC before March 2010)	Yes	Working
AF	Protected NDC (Protected BMC before March 2010)	Yes	Working
AG	Mixed NDC (Mixed BMC before March 2010)	Yes	Working
AJ	Single Piece	No	Working
BA	Urban Direct	No	N/A
BB	Rural Direct	No	N/A
BC	Station	No	N/A
BD	City	No	N/A
BE	FSA	No	N/A
BF	DCF	No	N/A
BG	FCP	No	N/A
BH	Province	No	N/A
BI	Residual	No	N/A

Copyright © 2016 USPS®. All Rights Reserved.

PreSort Types (containerLevelType)			
Code	**Description**	**Supported?**	**Type**
BJ	Foreign	No	N/A
BK	Country	No	N/A
BL	Mixed Country	No	N/A
BM	M Bags	No	N/A

Note: *New CSA based sort levels are under consideration for support by the FAST System. e.g., AK, AL, AM, AN, AO, AP, AQ, AR, AS, AT*

Rate Type (rateTypeType)		
Code	**Description**	**Supported?**
B	Bound Printed Matter	Yes
D	Parcel Select	Yes
F	Media	Yes
L	Library	Yes
P	Parcel Post	No**

Note: *** Parcel Post is not supported for drop ship appointments but is supported for Origin Entry appointments.*

Rate Type is required for all Package Services content.

NOTE*: The mailClassType, processingCategoryType, containerLevelType, and RateType fields are all contained in the USPS Summarization block. Each Delivery Appointment Query Request, Delivery Appointment Create Request, Delivery Appointment Update Request, Delivery Content Create Request and Delivery Content Update Request can contain more than one USPS Summary block. If a single USPS Summary block within these messages contains an unsupported or invalid type for any of these fields, the entire message will be rejected. In addition, a Return Code/Description will be returned for each violation.*

Only the following fields will be populated with new data in the response messages. All other information will simply be populated based on what was originally sent in the request message.

4.1.1 Delivery Appointment Query Response

- All available appointment(s) are populated in a one to many Available Hours element in 10-minute intervals in the AvailableSlots block.
- ReturnInfo block containing Drop Entry Warnings if any have occurred
- If no –available date/times are found, the ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.
- ReturnInfo block containing IM container barcodeWarnings if any have occurred

4.1.2 Delivery Appointment Create Acceptance Response

- The ScheduledAppt element in the ApptBlock block is populated.
- The ConsigneeApptID in the ResponseMsgHeaderInfo block is populated.
- The ConsigneeMultiStopID in the ResponseMsgHeaderInfo block is populated if the Appointment is tied to a Multistop.
- ReturnInfo block containing Drop Entry Warnings if any have occurred
- ReturnInfo block containing IMCB Warnings if any have occurred

4.1.3 Delivery Appointment Create Rejection Response

ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.

Copyright © 2016 USPS®. All Rights Reserved.

4.1.4 Delivery Appointment Update Acceptance Response

- The ScheduledAppt element in the ApptBlock block is populated.
- ReturnInfo block containing Drop-Entry Warnings if any have occurred
- ReturnInfo block containing IMCB warnings if applicable

4.1.5 Delivery Appointment Update Rejection Response

- ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.
- A ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated if the Appointment was not cancelled successfully.

4.1.6 Delivery Appointment Cancel Create Acceptance Response

- The ScheduledAppt element in the ApptBlock block is populated.
- The ConsigneeApptID in the ResponseMsgHeaderInfo block is populated.
- ReturnInfo block containing Drop Entry Warnings if any have occurred.
- Delivery Appointment Cancel Create Rejection Response
- ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.
- ReturnInfo block containing IM container barcode warnings if applicable

4.1.7 Delivery Content Accept Response

- The ConsigneeContentID in the ContentUSPSSummaryUpdate block is populated.
- ReturnInfo block containing Drop Entry Warnings if any have occurred.
- ReturnInfo block containing IM container barcode warnings if applicable

4.1.8 Delivery Content Reject Response

The ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.

4.1.9 Delivery Content Cancel Response

If the content cannot be cancelled, the ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.

4.1.10 Delivery Appointment Shell Accept Response

- The PreferredAppt element in the ApptBlock block is populated with the actual appointment date/time of the Scheduled appointment.
- The ConsigneeApptID in the ResponseMsgHeaderInfo block is populated.
- 9-digit numeric ID will be returned for one-time appointment
- 5-digit numeric ID followed by the “R” character will be returned for recurring sequences
- The OptionalAppt field is not returned in the response message.

4.1.11 Delivery Appointment Shell Reject Response

ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.

4.1.12 Delivery Appointment Shell Cancel Response

- A CancelConfirmID is populated if the appointment shell is cancelled.
- If the appointment cannot be cancelled, the ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.

4.1.13 Delivery Content Query Response

- A ContentUSPSSummary block for all active content is populated. See Appendix C – Errata # 89. There is change in USPSSummaryBlock; adding FullServiceIndicator element with acceptable values of ‘Yes’ or ‘No’ (This

Copyright © 2016 USPS®. All Rights Reserved.

change will only impact customers when FAST implements the next version of Mail.XML which may be a post November 2009.)

- If business rule violations occur, the ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.
- 5-digit Scheduler IDs will be returned in place of full Scheduler IDs for all mail preparers and mail owners. A full Scheduler ID will be returned if the Scheduler ID is the same as the requestor's Scheduler ID or the creator's Scheduler ID.

4.1.14 Recurring Appointment Query Response

- A RecurringApptBlk block for each active or pending recurring sequence is populated.
- A USPSSummary block for each active content is populated. See Appendix C – Errata # 89. There is change in USPSSummaryBlock; adding FullServiceIndicator element with acceptable values of 'Yes' or 'No'. (This change will only impact customers when FAST implements the next version of Mail.XML, which may be a post November 2009.)
- If no Recurring Appointment matches are found, the ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.
- 5-digit Scheduler IDs will be returned in place of full Scheduler IDs for all mail preparers and mail owners. A full Scheduler ID will be returned if the Scheduler ID is the same as the requestor's Scheduler ID or the creator's Scheduler ID

4.1.15 Partner Appointment Query Response

Scenarios/Permissions

- **Scheduler** - If the Submitting Party Scheduler ID corresponds to the Scheduler of the appointment, FAST will return all logistics and content information. A partial Scheduler ID (first 5 digits) will be returned for the Scheduler, Mail Owner(s) and Mail Preparers.
- **Mail Preparer** - If the Submitting Party Scheduler ID corresponds to the Mail Preparer of the appointment or within the Mail Preparer's corporation, FAST will return all logistics information and content information for which they are the Mail Preparer. A partial Scheduler ID (first 5 digits) will be returned for the Mail Preparer, Mail Owner(s) and Scheduler.
- **Mail Owner** - If the Submitting Party corresponds to the Mail Owner of the appointment or within the Mail Owner's corporation, FAST will return all logistics information and content information for which they are the Mail Owner. A partial Scheduler ID (first 5 digits) will be returned for the Mail Owner, Scheduler and Mail Preparer.
- An ApptBlk block for each appointment is populated.
- A ContentUSPSSummary block for all active content is populated.
- 5-digit Scheduler IDs will be returned in place of full Scheduler IDs for all mail preparers and mail owners.

Customer / Supplier Agreement Query Response

- A CSAInfo block for each pending, active or inactive Customer / Supplier Agreement is populated.
- If no Customer / Supplier Agreement matches are found, the ReturnInfo block containing one to many ErrorWarning blocks with code/ error description combinations is populated.
- If Customer Supplier Agreement ID (CSAID) is not provided, FAST will return all CSAs associated to the Owner CRID.

4.2 Business Rules

4.2.1 New Business Rules

- Appointment times may be modified from one (1) hour prior to and up to twenty-four (24) hours after the appointment time, but the new appointment time cannot be more than seventy-two (72) hours after the original appointment time. These appointments will be marked as Late Rescheduled on FAST reports.
- Only one modification within this window will be allowed.

Copyright © 2016 USPS®. All Rights Reserved.

4.2.2 Existing Business Rules

- To leverage the Mail Owner field in the DeliveryApptCreateRequest message, the “Mail Owner Identifier" field of the Component Record in Mail.dat must be populated with the 12-character Scheduler ID of the Mail Owner.
- The IDEAlliance specification allows for an unlimited number of USPS Summary blocks to be supplied in the Detail Information block. However, the maximum number of USPS Summary blocks allowed in any given message is 100.
- The IDEAlliance spec allows a Pallets block within a given USPSSummary block to contain both presort counts and non-presort counts. For the USPS implementation, all non-presort counts must be added together and summarized into a single pallets block.

  For example:
- The IDEAlliance spec allows for the following:

  Pallets Block 1: pallet count = 17

  - Presort 1: 5 digit, Count = 4
  - Presort 2: 3 digit, Count = 7
- The USPS implementation requires the pallets to be broken into two pallets blocks:

  Pallets Block 1: Count = 11

  - Presort 1: 5 digit, Count = 4
  - Presort 2: 3 digit, Count = 7

  Pallets Block 2: Count = 6

  No presort records

  ***NOTE**: If the total presort counts do not equal the pallet block count for a pallet block, an error message will be returned.*
- The IDEAlliance specification allows actual piece count to be provided for presort and non-presort counts. FAST will only use the actual piece count for volume if it is provided for all presorts and non-presorts for a given USPSSummary block.
- FAST will use the Actual Piece count for the following USPSSummary block scenario:

  Pallets Block 1: Count = 10

  - Presort 1: 5 digit, Count = 5, Actual Piece Count = 100
  - Presort 2: 3 digit, Count = 5, Actual Piece Count = 100
- FAST will NOT use the Actual Piece count for the following USPSSummary block scenario:

  Pallets Block 1: Count = 10

  - Presort 1: 5 digit, Count = 5, Actual Piece Count = 100
  - Presort 2: 3 digit, Count = 5, Actual Piece Count Not Provided
- FAST will NOT use the Actual Piece count for the following USPSSummary block scenario:
- Pallets Block 1: Count = 5, Actual Piece Count = 100
- Pallets Block 2: Count = 5, Actual Piece Count Not Provided
- The IDEAlliance specification allows multiple UniqueContainerBarcode elements to be included in a single USPS Summary block. The USPS implementation will store all UniqueContainerBarcode elements and will validate for uniqueness. Uniqueness is validated based on a 45-day timeframe. UniqueContainerBarcodes associated to an appointment that was scheduled for 45 days in the past or for an appointment that has been cancelled or rejected are considered valid for re-use. If an appointment is no-showed, all associated UniqueContainerBarcodes are valid again after 12 days (288 hours) for drop ship appointments, and after 5 days (120 hours) for Origin Entry appointments.

Copyright © 2016 USPS®. All Rights Reserved.

- The IDEAlliance specification allows multiple SiblingBarcode elements to be included in a single USPS Summary block. The USPS implementation will store all SiblingBarcode elements and will validate for uniqueness. Uniqueness is validated based on a 45-day timeframe.
- The IDEAlliance specification allows for the SiblingBarcode and the UniqueContainerBarcode to be between 1 and 24 characters. FAST requires that the SiblingBarcode and the UniqueContainerBarcode be 21 characters and begin with “99M”.
- The IDEAlliance specification allows multiple OptionalAppt elements to be included in a single Appointment block. The USPS implementation will only use the first OptionalAppt element and others will be ignored. In addition, the OptionalAppt element will only be supported for the Delivery Appointment Query Request message.
- The Facility Number should be populated with the facility Locale Key (characters 2-7 of the drop site key)
- The VerificationZip4 element in the Mail.dat Summarization block is not required in the IDEAlliance specification. However, it is a required element for the USPS implementation when using the Mail.dat Summarization block because the VerificationZip4 element must be provided in order to retrieve the actual Mail.dat data.
- Before any message is sent that requires the *PostalOne!* system to populate information from Mail.dat data, the Shipper must ensure the Mail.dat data that corresponds to the Appointment is up to date in the *PostalOne!* system prior to sending a Web Services request.
- The Perishable element is a required field in the USPSSummary block. It does not exist in the Mail.dat. The *PostalOne!* system will set the Perishable element value to ‘No’ when the *PostalOne!* system populates an USPSSummary block with Mail.dat data.
- For the Customer Registration Process, the user belonging to a Shipper must identify and verify his/her company’s correct corporate headquarters (HQ) location ZIP (e.g., 22202-6761-000). The FAST system will generate a 12-byte field for that 9 digit Scheduler Corporate ZIP+4, e.g., 222026761000. The last three digits of a Scheduler Corporate ID will always be 000 (three zeroes) unless there is a duplicate record with 000 (in which case it would be incremented to the next value – e.g. 001). This ‘SchedulerCorporateID’ will be provided by the FAST system to all shippers via e-mail and it will be sent to the *PostalOne!* system with every Web Services transaction by the shipper. Each User must also be assigned a ‘SchedulerID’ by the FAST system, which will be used to uniquely identify the scheduler entity. The ‘SchedulerID‘ will be generated in the background and shown to the user on the screen.
- The Scheduler ID will also be e-mailed to the user/Scheduler/Shipper, so Shipper can always ensure the correct ‘SchedulerID’ is always part of every Web Services message that is sent to USPS for identification purposes. The Scheduler entity can be an internal business role within a Shipper’s organization and will be tied to the Shipper’s corporate headquarters for FAST to rate the Shipper’s corporation. The format of the Scheduler ID will be location ZIP+4 format plus three bytes (201486791001). A unique Scheduler ID will be generated in the ZIP+4 format with appended sequence numbers (always three digits and these three digits will never be three zeroes) and communicated to the user via e-mail each time for a given Scheduler entity.

  For example, the FAST system will use the following example format to identify Corp HQ and Scheduler Locations:

  > 222021234000 - Corporate HQ (saved without the hyphen). Shipper MUST **not** use a hyphen (-) when sending the SchedulerCorpID to USPS). The first nine digits will be the Corporate HQ ZIP+4 and the last three digits will be sequence numbers and will always be three zeroes (000).
  >
  > 222021234100 - SchedulerID or Scheduler Entity ID (business role) at a given Shipper location (saved without the hyphen). Shipper MUST **not** use a hyphen (-) when sending the SchedulerID to USPS. The last three digits will be sequence numbers and will never be three zeroes.

- Do not send the same request repeatedly in succession if you did not receive an immediate response. Sending the message repeatedly with the same ShipperApptRequestID for a given SchedulerID will result in an error. If you received a Tracking ID from the *PostalOne!* system, use that Tracking ID to retrieve your message in the first response.
- The DeliveryContent messages can be used by Schedulers, Mail Owners and Mail Preparers to add/update/cancel drop ship content:
- Stand-alone content - FAST shall treat the content as stand-alone content if the ConsigneeApptID is not provided in the request message. Stand-alone contents can be leveraged only for drop ship scenarios.

Copyright © 2016 USPS®. All Rights Reserved.

- One-time content for an existing appointment - FAST shall treat the content as one time content if the ConsigneeApptID provided in the request message is a 9-digit appointment ID.
- Recurring content for an existing recurring sequence - FAST shall treat the content as recurring content if the ConsigneeApptID provided in the request message is a 5-digit recurring sequence ID followed by the character "R".
- The DeliveryContentQuery messages may be used to query content for drop ship and origin-entry appointments.
- The DeliveryApptShellUpdateRequest should be used to update one-time and recurring appointment-level detail for an appointment with associated content, however, it may not be used to update the facility of an appointment if the appointment has associated content. The DeliveryApptShellUpdateRequest may only be used to update the facility for one-time appointments with no associated content and recurring appointments that are pure periodicals that are subject to one or more redirections.
- The DeliveryApptShellCancelRequest may only be used to cancel one-time appointment shells that have no associated content. The DeliveryApptCancelRequest should be used for any appointments that have associated content.
- The DeliveryApptShellCancelRequest may be used to cancel recurring appointments with associated content or recurring appointment shells previously created via Web Services.
- The IDEAlliance specification allows multiple AdvanceMailingID elements to be included in a single USPSSummary block. FAST will only use the first AdvanceMailingID element and others will be ignored.
- The SchedulerContentID in the DeliveryContentCreate, DeliveryContentUpdate and DeliveryContentCancel messages is an ID generated by the Scheduler and should be numeric with no alphabet characters.
- The SchedulerContentID may be populated by the customer with a 12 digit (or less) numeric value. If SchedulerContentID is not populated in a MailDatSummary block, the *PostalOne!* system will populate SchedulerContentID in both the MailDatSummary block and the corresponding USPS Summary block with a *PostalOne!*-generated alphanumeric field consisting of P followed by a sequence of 11 digits or less. The SchedulerContentID will be populated in response messages with this value.
- The FullContentReplacement field in the header of the DeliveryContentUpdateRequest may only be "Yes" if a ConsigneeApptID is provided. If the FullContentReplacement field is "Yes," FAST will cancel all content in an appointment created by the SchedulerID provided. If a ConsigneeContentID is provided in the DeliveryContentUpdateRequest, then the content will be updated and not canceled.
- The TransferAllContent field in the header of the DeliveryApptCancelCreateRequest may only be "Yes" if there is only one appointment that will be cancelled. If the TransferAllContent field is "Yes" FAST will cancel all contents on the appointment
- The IDEAlliance specification allows for MixedLengthTrays to be a valid palletHandlingUnitType for Origin Entry mail. FAST shall convert all MixedLengthTrays to 2' Trays for Origin Entry mail.
- FAST requires either the ConsigneeApptID or the following fields be populated: ScheduledInductionDate and either LogisticsSchedulerCRID or both LogisticsSchedulerID and LogisticsSchedulerCorpID.
- FAST will not support a mix of both origin entry and drop ship contents on the same appointment. If DestinationDiscountIndicator is set to 'Yes', the content will be designated as drop ship, if DestinationDiscountIndicator is set to 'No', the content will be designated as origin entry.
- The ContainsAutoMail field will be used to determine whether letter and flats are automated or not for origin entry content.
- The ContainsAutoMail field will only be used for letters and flats.
- The IDEAlliance specification allows for all enumerations of palletType regardless of the Mail Class. FAST requires that the USPS Marketable Mail, Package Services, Periodicals and USPS Marketable Mail/Periodicals Co-Mailings contents have a palletType of "Pallet". All enumerations of palletType will be accepted for First-Class contents.
- If Customer Supplier Agreement ID (CSAID) is not provided, FAST will return all CSAs associated to the Owner CRID.

Copyright © 2016 USPS®. All Rights Reserved.

- Drop shipment appointments and drop shipment recurring appointments can only be scheduled hourly on the hour (e.g. 10:00:00 or 11:00:00). Origin Entry mailer transported appointments for one time and recurring appointments can only be scheduled in 10 minute intervals (e.g. 10:00:00, 10:10:00 or 10:20:00).
- Contents with Intelligent Mail Container Barcodes may not be added to one time drop ship appointment shells within 24 hours of the appointment date/time.
- Contents with Intelligent Mail Container Barcodes may not be added to one time drop ship pure periodical appointment shells within one hour of the appointment date/time.
- Contents with Intelligent Mail Container Barcodes may not be added to one time origin entry appointment shells within one hour of the appointment date/time.
- Mailers utilizing *PostalOne!* Mail.dat Summary block to create/update content for recurring appointment instances in FAST may provide sibling barcodes without an associated parent barcode. The PartnerApptQueryResponse and DeliveryContentQueryResponse messages will return a “NA” in the UniqueContainerBarcode element for this content.
- Drop ship one time appointments created online can be updated or cancelled via Web Services.
- Drop ship recurring appointment sequences created via Web Services cannot be updated or cancelled online.
- Drop ship recurring appointment sequences created online can be updated or cancelled via Web Services.
- Origin Entry one time appointments created via Web Services can have appointment logistics updated online, but content cannot be updated or be cancelled online.
- Origin Entry one time appointments created online can be updated or cancelled via Web Services.
- Origin Entry recurring appointment sequences created via Web Services appointment logistics can be updated online, but content cannot be updated or cancelled online.
- Origin Entry recurring appointment sequences created online can be updated or cancelled via Web Services.
- Drop ship stand-alone content created or updated via Web Services may be associated to an appointment or rejected online.
- Origin entry stand-alone content created or updated via Web Services may be associated to an appointment or rejected online.
- FAST will support Air Box as a container type.
- The FAST system shall support pallet type appointments for Service HUBs through Mail.XML 14.0A.
- FAST receives recurring appointment data from the *PostalOne!* system when the data is available from Qualification report messages or container update requests.
- FAST will allow scheduling at FSS Sites for FSS Scheme mail (MailDatCode=’E’)
- FAST will support Parcel Select as a mail class, separate from Package Services – to utilize this functionality, users should set MailClass = 4 and RateType = ‘D’ (Parcel Select).
    - To set the Entry Type, populate FacilityType with one of the following strings: DNDC, DSCF, NDC, NONE, ONDC.
    - To set the Machinability Type, populate ProcessingCategory with “MP” (Machinable Parcels), “IR” (Irregular Parcels), or “NP” (Non-machinable Parcels).
    - To set the Presort Type, populate the USPSContainerInfo block (for Presort), or leave it empty (for Nonpresort)
    - To set the Sort, populate the MaildatCode (containerLevelType) with T (3 Digit (Presort)), I (5 Digit (Presort Only)), AG (Mixed NDC), AE (NDC), or X (SCF)
- The following combinations will be allowed for the Parcel Select mail class and DNDC entry:
    - Machinability Type = Machinable, Presort Type = Presort, and Sort = NDC
    - Machinability Type = Nonmachinable, Presort Type = Presort, and Sort = NDC

Copyright © 2016 USPS®. All Rights Reserved.

  - Machinability Type = Machinable, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = SCF
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = NDC
- The following combinations will be allowed for the Parcel Select mail class and DSCF entry:
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Nonmachinable, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Nonmachinable, Presort Type = Presort, and Sort = 3-Digit
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = SCF
- The following combinations will be allowed for the Parcel Select mail class and NDC entry:
  - Presort Type = Presort and Sort = Mixed NDC (NOTE: The Machinability Type field is not applicable in this scenario and is not required.)
- The following combinations will be allowed for the Parcel Select mail class and NONE entry type:
  - Presort Type = Nonpresort (NOTE: Machinability Type and Sort are not applicable in this scenario and is not required.)
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = Mixed NDC
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = Mixed NDC
- The following combinations will be allowed for the Parcel Select mail class and ONDC entry type:
  - Presort Type = Presort and Sort = Mixed NDC (NOTE: Machinability Type is not applicable in this scenario and is not required.)
- The following message types will support the Parcel Select mail class:
  - Delivery Appointment Create
  - Delivery Appointment Update
  - Delivery Appointment Query
  - Delivery Appointment Cancel Create
  - Delivery Content Query
  - Delivery Content Create
  - Delivery Content Update
  - Recurring Appointment Query
  - Partner Appointment Query
  - Stale Content Query
  - USPS Delivery Content Updated Query
-
- FAST will support CarrierName, CarrierCRID, and CommonContact (ContactName, Telephone, ContactType) within the CarrierType element. The messages supporting this will be DeliveryApptCreateRequest, DeliveryApptUpdateRequest, DeliveryApptShellCreateRequest, DeliveryApptShellUpdateRequest, DeliveryApptQueryRequest, DeliveryApptCancelCreateRequest, and PartnerApptQueryRequest. The information will be returned in ConsigneeGoodsReceipt data sent to PostalOne! The CarrierType element is already supported within 14.0A for these message types, within TrailerInfoType. FAST will reject the Carrier CRID if it is not a valid CRID
- FAST will support Parcel Select as a mail class, separate from Package Services – to utilize this functionality, users should set MailClass = 4 and RateType = ‘D’ (Parcel Select).

Copyright © 2016 USPS®. All Rights Reserved.

- To set the Entry Type, populate FacilityType with one of the following strings: DNDC, DSCF, NDC, NONE, ONDC.
- To set the Machinability Type, populate ProcessingCategory with “MP” (Machinable Parcels), “IR” (Irregular Parcels), or “NP” (Non-machinable Parcels).
- To set the Presort Type, populate the USPSContainerInfo block (for Presort), or leave it empty (for Nonpresort)
- To set the Sort, populate the MaildatCode (containerLevelType) with T (3 Digit (Presort)), I (5 Digit (Presort Only)), AG (Mixed NDC), AE (NDC), or

- The following combinations will be allowed for the Parcel Select mail class and DNDC entry:
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Nonmachinable, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = SCF
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = NDC
- The following combinations will be allowed for the Parcel Select mail class and DSCF entry:
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Nonmachinable, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Nonmachinable, Presort Type = Presort, and Sort = 3-Digit
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = 5-Digit
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = SCF
- The following combinations will be allowed for the Parcel Select mail class and NDC entry:
  - Presort Type = Presort and Sort = Mixed NDC (NOTE: The Machinability Type field is not applicable in this scenario and is not be required.)
- The following combinations will be allowed for the Parcel Select mail class and NONE entry type:
  - Presort Type = Nonpresort (NOTE: Machinability Type and Sort are not applicable in this scenario and should not be required.)
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Machinable, Presort Type = Presort, and Sort = Mixed NDC
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = NDC
  - Machinability Type = Irregular, Presort Type = Presort, and Sort = Mixed NDC
- The following combinations will be allowed for the Parcel Select mail class and ONDC entry type:
  - Presort Type = Presort and Sort = Mixed NDC (NOTE: Machinability Type is not applicable in this scenario and is not be required.)
- The following message types will support the Parcel Select mail class:
  - Delivery Appointment Create
  - Delivery Appointment Update
  - Delivery Appointment Query
  - Delivery Appointment Cancel Create
  - Delivery Content Query
  - Delivery Content Create
  - Delivery Content Update
  - Recurring Appointment Query

Copyright © 2016 USPS®. All Rights Reserved.

- Partner Appointment Query
- Stale Content Query
- USPS Delivery Content Updated Query

- To create a Parcel Return Service appointment, utilize the DeliveryApptShellCreateRequest and set the Comment field to ‘APPTTYPPRS’.
- To update a Parcel Return Service appointment, utilize the DeliveryApptShellUpdateRequest and set the Comment field to ‘APPTTYPPRS’ while referencing the existing Appointment ID of the PRS appointment created.

Copyright © 2016 USPS®. All Rights Reserved.

4.2.3 Detail Info Block

PostalOne! will support the following method to populate the DetailInfo Block

PostalOne! Option: Shipper uses a DetailInfo Block to represent a PS 8125 Form.

Shipper uses a USPSSummary or MaildatSummary block to represent a mail job.

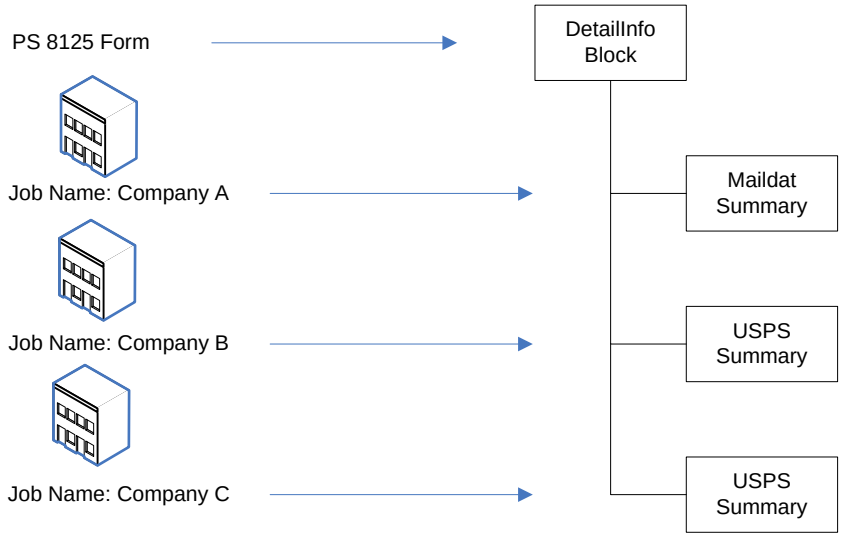

4.3 Multistop Support

The following is a breakdown of what is supported from a Multistop perspective:

4.3.1 FAST Online Application

- Create a new Appointment and associate it to a new Multistop.
- Create a new Appointment and associate it to an existing Multistop.
- Disassociate an existing Appointment from a Multistop (the Appointment is still active but it is no longer associated with a Multistop).
- Cancel the entire Multistop and therefore cancel all Appointments associated with that Multistop.

4.3.2 Web Services

- Create a new Appointment and associate it to a new Multistop.
- Create a new Appointment and associate it to an existing Multistop.

NOTES:

- An Appointment tied to a Multistop cannot be directly disassociated from that Multistop via Web Services. The Appointment will have to be canceled and rescheduled without the Multistop information OR the Appointment can be disassociated online.
- An existing Appointment cannot be added to an existing or new Multistop through online or Web Services. In both cases, the Appointment will have to be canceled and rescheduled with the Multistop information.
- Any time an Appointment is canceled, the overall corporate rating may be impacted. Please see Mailer/Appointment Rating section of the *FAST User Guide* for more details on the rating calculation.

4.4 Error Codes/Return Values

For Release 30.0, FAST will be introducing Mail.xml error standardization in order to align with other Postal systems and provide additional detail to end users within Mail.xml error and warning responses.

1. Error Code

Copyright © 2016 USPS®. All Rights Reserved.

2. Severity or Error Type (Error vs. Warning)
3. Error Description
4. Submission Date
5. Action necessary to resolve the error or warning

Action messages will be added to this document as they become defined.

Code	Error Message	Action	Tech Spec Version
1004	Invalid ConsigneeApptID	The ConsigneeApptID is not valid or was not provided. Enter a new ConsigneeApptID and try again.	All
1009	No slots available for that time/type - dock limit	Please try with either different Appointment Type or different time Slots.	All
1010	No slots available for that time/type - production limit	The volume requested (9) for the Machinable Parcel volume type exceeded the maximum available volume: 0	All
1011	<appointment_type> Appointment must be scheduled at least <min_hour> hour in advance.	Please update the Appointment Date/Time so that it is at least <min_hour> hour beyond the Appointment message submission time.	All
1012	Appointments may only be scheduled up to 21 days in advance	Appointments may only be scheduled up to 21 days in advance	All
1015	Update/cancel refused - appointment closed/cancelled	This appointment has already been closed/cancelled and cannot be modified any further	All
1018	Requested appt date/time is past	Please change the Appointment Date/Time to a value greater than the current date/time.	All
1019	Update/Cancel not allowed past consignee editable time threshold	This action is no longer available.	All
1029	Update/Cancel not allowed past consignee editable time threshold	This action is no longer available.	All
1202	Invalid Mail Shape/Handling Unit combination	Please select another combination, Letter/Parcels is not a valid combination.	All
314	Generic Error code	You have experienced an error with the application. Please contact your FAST or Web Services system administrator for help	All
3000	Scheduler ID is not valid		All
3001	Scheduled Appointment time must be scheduled on the hour		All
3002	Customer and Consignee Multistop ID do not correspond		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3003	Perishable content is only valid when Processing Category (Mail Shape) is Machineable Parcel, Outside Parcel (Non-Machineable Parcel), or Irregular Parcel		All
3004	Optional Appointment Start Time must be before the Optional End Time		All
3005	Optional Appointment Start Time must be within 8 hours of the Optional End Time		All
3006	The time difference between the first and last appointment of a multi-stop must be within 24 hours		All
3007	Appointment date/time must be earlier than In Home Start Date		All
3008	Number of USPSSummary blocks exceeded maximum limit of 100		All
3009	A Speedline Appointment cannot have more than 6 pallet positions	Please change the number of pallet positions to <number> or <operator>.	All
3010	Appointments must be updated at least 1 hour in advance		All
3011	Facility does not accept drop shipments.		All
3012	An appointment with this Scheduler ID and Scheduler Appointment Request ID already exists		All
3013	Valid content count must be present for each USPS Summary block		All
3015	A Pallet Appointment must have a Count of Pallets Containing Trays, Sacks, Bundles or Parcels		All
3016	Bedload and Drop and Pick Appointments may not have a Count of Pallets Containing Sacks, Trays, Bundles, or Parcels		All
3017	A Speedline Appointment may not have a Bedloaded Tray, Sack, Bundle or Parcel Count		All
3018	<MailClass/MailShape> are not accepted at this Facility. Please create an appointment at <facility>	Please create this appointment at <facility> or select a different Mail Class/Mail Shape.	All
3019	A Speedline Appointment cannot have more than 24 total pallets	Please change the total number of pallets to 24 or fewer.	All
3020	Application cannot get response for the given tracking ID (Refer to Notes below)		All
3021	A USPSSummary type was not provided in any of the DetailInfo blocks (See Notes below)		All
3022	Invalid Mail Preparer ID		All
3023	Invalid Mail Owner ID		All
3024	Invalid Publication ID		All
3027	Update/cancel refused – content does not exist		All
3028	Invalid Mail Class for Appointment	Select a valid Mail Class. This appointment can accept these Mail Class(es): <mail class>. If additional Mail Classes are needed to associate your content to this appointment, the Scheduler will need to enable them at the	All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
		appointment-level.	
3029	No update to Content made		All
3030	Publications only valid when Mail Class is Periodicals		All
3031	Invalid TM Spec Version		All
3032	Content may not be cancelled – appointment must have at least one content		All
3033	Invalid ConsigneeContentID		All
3034	Scheduler ID does not correspond to Scheduler ID for content		All
3035	Scheduler ID and Appointment ID do not correspond		All
3036	Facility ID and Appointment ID do not correspond		All
3037	Appointment may not be cancelled – appointment has associated content – please use the DeliveryApptCancelRequest message to cancel this appointment		All
3038	Invalid ConsigneeApptID – Appointment is not a Web Services appointment		All
3039	RecurringAppt block not supported by Consignee		All
3040	Update refused – may not change facility for this appointment – this appointment has associated content		All
3041	Web Services appointments/contents may not be cancelled greater than 24 hours past the appointment date/time		All
3042	Invalid TM Spec Version – Mailer not certified for TM Spec Version		All
3043	Content update/cancel refused – content was not created by a DeliveryContentCreateRequest message		All
3044	Invalid TM Spec Version – Appointment has been previously updated with a higher version		All
3045	Pallet Presort Level Counts must equal Pallet Level Counts		All
3047	A Drop and Pick Appointment Type may not be a Multi-Stop		All
3048	Invalid cancellation reason		All
3049	Scheduler for appointment must use the DeliveryApptUpdate message to add/update content(s)		All
3050	Invalid Unique Container ID – Container ID must be 21-digits and begin with 99M		All
3051	No content associated to appointment		All
3052	Mailer must provide FAST content ID on update using a DeliveryContentUpdateRequest or a DeliveryContentUpdateRequest Message		All
3053	NDC discount for Periodicals is only valid for cross		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3055	Truck lengths <range> <truck length> ft are not accepted at <NASS Code - Facility Name>. Please refer to the Mail Direction Search Report or Drop Ship Product for the correct accepting facility.		All
3056	Truck lengths <range> <truck length> ft are not accepted at <NASS Code - Facility Name>. Please refer to the Mail Direction Search Report or Drop Ship Product for the correct accepting facility.		All
3057	No slots available for the requested time/type due to tiering		All
3058	Number of Pallet Positions must be specified when Appointment Type is Speedline		All
3059	Facility cannot be modified for recurring appointment instances.		All
3060	Effective Start Date must be 14 days in the future		All
3061	Effective Start Date must be before the Effective End Date		All
3062	Invalid Day Frequency/Week Frequency Combination. A Day Frequency of Daily must have a Week Frequency of Weekly		All
3063	eVS Indicator is only valid when Processing Category (Mail Shape) is Machineable Parcel, Outside Parcel (Non-Machineable Parcel), or Irregular Parcels		All
3064	eVS Indicator is only valid when Mail Class is USPS Marketable Mail, Package Services or First-Class		All
3065	eFile Number is only valid when eVS Indicator is Yes		All
3066	The eFile Number must be 22 digits		All
3067	Priority Mail Indicator is only valid when Mail Class is First-Class		All
3068	<Pallet Type> is only valid when the Mail Class is First-Class		All
3069	Either the appointment ID or the following fields are required: scheduled induction date, and either logistics scheduler CRID or both logistic scheduler ID and logistic scheduler Corp ID		All
3069	Either the appointment ID or all of the following fields are required: scheduled induction date, logistic scheduler ID and logistic scheduler Corp ID		All
3070	Scheduled Induction Date cannot be in the past		All
3071	Invalid Logistic Scheduler ID		All
3072	Invalid Requestor Scheduler ID		All
3073	Invalid Requestor Scheduler Corp ID		All
3074	Invalid Requestor Scheduler ID for Requestor Scheduler Corp ID		All
3075	Invalid TM Spec Version - Content has been previously updated with a higher version		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3076	Invalid Creator Scheduler ID for Creator Scheduler Corp ID		All
3077	Invalid Creator Scheduler Corporate ID		All
3078	Creator Scheduler ID is not valid		All
3079	Facility Locale Key is required for this message		All
3080	Invalid SchedulerContentID/ConsigneeContentID combination		All
3081	Update/Cancel refused: Content ID does not match specified Job ID, Database Container ID, User License Code, and Verification Zip+4		All
3082	ConsigneeApptID is required to update associated content		All
3083	Content has been previously associated to an appointment	Select a ContentID that is not associated to an appointment.	All
3084	Invalid SchedulerID – Scheduler ID provided is not the Logistic Scheduler		All
3085	No more than 100 Contents may be associated to a single appointment		All
3086	The total volume of Bedload contents may not exceed 9999		All
3087	The total volume of Pallet, Hamper, APC/ERMC and Wire Container contents may not exceed 9999		All
3088	Invalid SchedulerContentID		All
3089	Appointment Time not within Facility hours of operation		All
3090	The only valid handling units for a First-Class Appointment are 1' Tray, 2' Tray, EMM Tray, Flat Tub, Parcels and Sacks		All
3091	Consignee does not accept First-Class appointments at this facility		All
3092	Unable to associate stand-alone content (ConsigneeContentID <Content ID>) - content cancelled		All
3093	Your search did not return any result		All
3094	A recurring appointment with this Scheduler ID and Shipper Appointment Request ID already exists.		All
3095	Effective End Date must not be greater than 12/31/2999		All
3096	Invalid Recurring Frequency		All
3098	The Priority Mail indicator is only valid on First-Class Contents		All
3099	At least 1 Pallet/Bedload count must be provided		All
3100	May not cancel/delete an online content(s)		All
3102	A one day In-Home Date Range may not be on a Sunday		All
3103	Invalid Logistic Scheduler Corp ID		All
3104	Invalid Logistic Scheduler ID for Logistic Scheduler Corp ID		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3105	Full content replacement is only valid when the Consignee Appointment ID is provided		All
3106	Consignee does not support <Mail Class> for this message type.		All
3107	Update/Cancel Refused – Content is Closed/Cancelled		All
3108	Appointment cannot contain both drop ship and First-Class contents		All
3110	Content Cancel Refused – Content is associated to an Appointment	Please include the ConsigneeApptID in the DeliveryContentCancel message or select a different ConsigneeContentID.	All
3118	The Start Time may not be in the past		All
3119	May not search for appointment slots more than 14 days after the current date		All
3120	An appointment cannot have both drop ship and Origin Entry content		All
3122	Invalid Customer Registration ID for Scheduler ID		All
3123	Facility cannot be modified for Recurring Appointment sequences.		All
3125	Query Refused – {Recurring Appointment Sequence/Unscheduled Appointment/ Appointment Shell} querying is not supported in PartnerApptQueryRequest.		All
3126	Either the Submitting Party Scheduler ID or Customer Registration ID is required		All
3127	Invalid Submitting Party Scheduler ID		All
3128	A Recurring Origin Entry Appointment Sequence must have a Weekly Frequency of “Weekly”		All
3129	A Rate Type must be selected for Package Services content	Select a Rate Type for the Package Services content. Valid Rate Types are B (Bound Printed Material), F (Media), and L (Library).	All
3130	Invalid Customer / Supplier Agreement ID		All
3131	Update Refused - Mail Class cannot be modified. There is at least one <Mail Class> content associated to this appointment.		All
3133	Scheduler cannot be modified for stand-alone contents		All
3134	May not create this appointment with the same appointment date and time as another appointment on the Multistop.		All
3135	Update Refused - Mail Class cannot be modified. There is at least one <Mail Class> content associated to this appointment.		All
3136	May not cancel an appointment with Partial closeout information.		All
3137	Recurring appointments must span at least 7 days		All
3138	The effective end date of your appointment has been updated to be in sync with the drop entry dates of the facility and the resulting date range does not span at least 7 days.		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3139	A Speedline appointment that has Pallet Position Count of <total_pallet_positions> cannot have a total pallet count that is more than <total_pallets>		All
3140	A Content with this Scheduler ID and Scheduler Content Request ID already exists		All
3141	Effective Start Date must be at least 1 day in the future.		All
3142	Scheduled Appointment time must be scheduled on 10-minute intervals		All
3143	The date range may not exceed 24 hours		All
3144	The Optional Start and Optional End times must be scheduled on 10-minute intervals		All
3145	The Customer Registration ID cannot be authenticated at this time, please try again later.		All
3146	Submitting user Customer Registration ID is not affiliated with business entity in FAST.		All
3147	Either the Customer Registration ID or both Scheduler ID and Scheduler Corporate ID is required.		All
3148	This Intelligent Mail Container Barcode has previously been associated to a Full-Service content.	Disassociate the Intelligent Mail Barcode from its current content and retry, or submit a different barcode not already associated to a Full Service content.	All
3149	Invalid Logistics Customer Registration ID for Logistics Scheduler ID.		All
3150	Invalid Logistics Customer Registration ID.		All
3151	Either the Logistics Customer Registration ID or both Logistics Scheduler ID and Logistics Corporate ID is required.		All
3152	Package Services subtype is a required field for Origin Entry Package Service contents.		All
3153	Cannot update a drop ship appointment to only have Origin Entry contents.		All
3154	Cannot update an Origin Entry appointment to have drop ship content(s).		All
3155	Drop ship contents may not be associated to Origin Entry appointments.		All
3156	A drop ship appointment must have at least one drop ship Content.		All
3157	Content may not be cancelled-drop ship appointments must have at least one drop ship contents.		All
3158	Invalid content for appointment.		All
3159	Invalid Customer Registration ID for Corporate ID.		All
3160	Web Services/Online Appointment Shells must be scheduled at least 24 hours in advance		All
3161	Appointment must have at least one content within 24 hours of the appointment date/time		All
3471	Contents may only be cancelled from the same appointment.		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3472	Invalid Mail Preparer CRID		10.0 and Newer
3473	Invalid Mail Owner CRID		10.0 and Newer
3474	Mail Preparer CRID does not correspond to Mail Preparer ID		10.0 and Newer
3475	Invalid Partner Owner Scheduler ID		All
3476	Invalid Partner Owner Customer Registration ID		All
3477	Invalid Partner Owner Customer Registration ID for Partner Owner Scheduler ID		All
3478	Partner Owner provided is not the Logistic Scheduler of the content specified		All
3480	Stand-Alone content association is not supported for Recurring Appointments		10.0 and Newer
3481	Intelligent Mail package barcodes are only valid for a Bedloaded Sack.		All
3482	Intelligent Mail tray barcodes are only valid for a Bedloaded Tray.		All
3484	Retrieve Content Updated Start Date and Retrieve Content Updated End Date are required.		All
3485	Retrieve Content Updated Start Date must be before the Retrieve Content Updated End Date.		All
3486	The Retrieve Content Updated Date range may not exceed <value> days.		All
3487	The Retrieve Content Updated Start Date may not be greater than <value> days in the past.		All
3488	The Retrieve Content Updated End Date may not be greater than <value> days in the past.		All
3489	The Retrieve Content Updated Start Date cannot be in the future.		All
3490	The Retrieve Content Updated End Date cannot be in the future.		All
3491	The Retrieve Content Updated Start Date and Retrieve Content Updated End Date range must be the same for all Query Parameters.		10.0 and Newer
3492	Invalid Query Parameters - input types specified must all be the same		10.0 and Newer
3493	Both Retrieve Content Updated Start Date and Retrieve Content Updated End Date are required if one is provided.		All
3494	A USPSSummary type or a valid Consignee Content ID was not provided in any of the DetailInfo blocks		10.0 and Newer
3495	Query Refused - unassociated querying is not supported in StaleContentQueryRequest.		All
3496	The Number of Days Stale cannot be less than <value> days.		10.0 and Newer
3497	The Number of Days Stale cannot be greater than <value> days.		10.0 and Newer

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3498	The Number of Days Stale is required.		10.0 and Newer
3500	Query Refused - <appt_type> querying is not supported in USPSDeliveryContentUpdatedQueryRequest.		All
3501	Origin Entry contents may not be associated to Drop Ship appointments.		All
3502	Association Refused - scheduler is not associated to the specified content		All
3503	Assignment Refused - Only Stand-Alone Content is support for PartnerContentAssignmentRequest		All
3504	Consignee Content ID must reference valid Stand Alone Content.		All
3505	Stale Content is content not associated to an appointment, Appointment ID may not be provided when querying for Stale Content.		10.0 and Newer
3506	Invalid search parameters - ConsigneeContentID is not associated to the Facility provided.		All
3507	Invalid search parameters - ConsigneeContentID is not stale within the NumberOfDaysStale provided.		All
3508	Invalid search parameters - No contents were updated during the date range provided.		All
3509	Invalid search parameters - ConsigneeContentId was not updated during date range provided.		All
3510	Invalid search parameters - No content associated to the ConsigneeApptId was updated during the date range provided.		All
3511	Stale Content is content not associated to an appointment. The ConsigneeContentID provided is associated to a FAST Appointment.		All
3512	Only Content Volume changes may be made during the Restricted Window.		All
3513	Content Volume change exceeded the allowable limit.		All
3514	Query Date Range must be within 90 days of the current date.		All
3515	Date Range Invalid: the Start Date cannot be after the End Date.		All
3516	Both the Start Date and the End Date must be within 14 days of the current date.		All
3517	Invalid Query Parameters: Either the ConsigneeApptID or the Date Range (Start Date and End Date) must be provided.		All
3518	This Intelligent Mail Container Barcode has previously been associated to eInduction content.		All
3519	Update refused. SchedulerContentID = <Customer Content ID> currently associated to an existing content on this appointment.		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3520	The ConsigneeContentID is not associated with the SchedulerContentID.		All
3524	The Facility must be a DDU and it must accept the requested service type.		14.0A
3525	Actual Piece Count is required.		14.0A
3526	Mail Class must be Package Services only.		14.0A
3527	Rate Type must be Parcel Select only.		14.0A
3528	The service requested cannot be created or modified within 24 hours.		14.0A
3529	This service is not available to the selected scheduler.		14.0A
3530	IMCB is required.		14.0A
3531	This Intelligent Mail Container Barcode has previously been associated to a Value Added Service content		14.0A
3532	Shell messaging does not support the service type		14.0A
3533	The mail preparer does not have a valid Negotiated Service Agreement for the selected service type.		14.0A
3534	This Mail.XML spec version is not supported for Value Added Service appointments.		All
3535	Origin Entry content is not valid for Value Added Service appointments.		14.0A
3536	Actual piece count cannot be greater than <maxPieceCount>.		All
3537	Bedload Counts are not allowed for Service Hubs.		All
3538	ShipperMultiStopID <ShipperMultiStopID> is already in use by another Scheduler. Please use a different ShipperMultiStopID.		All
3539	Only Pallet Appointments are allowed for Service Hubs.		All
3540	Mail Shape must be Flats.		All
3542	Rate Type must be BPM/Library/Media.		All
3543	FSS (MaildatCode=E) is only applicable to Flats		All
3546	The service requested is not valid for Origin Entry.		14.0A
3547	The Facility must be a SCF and it must accept the requested service type.		14.0A
3548	Mail Class must be First-Class only.		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
3549	Web Services appointments/contents cannot be cancelled when within 1 hour of scheduled appointment time.		All
3550	The Presort Type (PalletPreSortLevel block) is required field when Entry Type (FacilityType) is DNDC, DSCF/DNDC, DSCF, NDC or ONDC.		All
3551	The Sort ({0}) value must be provided when the Presort Type (PalletPreSortLevel block) is provided.		All
3552	The valid Facility Type for drop ship appointment is DSCF/DNDC, DNDC, or DSCF.		All
3555	The Sort must be 3-Digit ({0}=T) for Parcel Select Next Day appointments.		All
3556	The Sort must be 5-Digit ({0}=I) or NDC ({0}=AE) when the Facility Type is DNDC and ProcessingCategory is Machinable.		All
3557	The Sort must be NDC ({0}=AE) when the Facility Type is DNDC and ProcessingCategory is Nonmachinable.		All
3558	The Sort must be 5-Digit ({0}=I), NDC ({0}=AE) or SCF ({0}=X) when the Facility Type is DNDC and ProcessingCategory is Irregular Parcels.		All
3559	The Sort must be 5-Digit ({0}=I) when the Facility Type is DSCF and ProcessingCategory is Machinable.		All
3560	The Sort must be 3-Digit ({0}=T) or 5-Digit ({0}=I) when the Facility Type is DSCF and ProcessingCategory is Nonmachinable.		All
3561	The Sort must be 5-Digit ({0}=I) or SCF ({0}=X) when the Facility Type is DSCF and ProcessingCategory is Irregular Parcels.		All
3562	The Sort must be NDC ({0}=AE) or Mixed NDC ({0}=AG) when the Facility Type is NONE.		All
3564	The Machinability Type must be Machinable (ProcessingCategory=MP) or Irregular (ProcessingCategory=IR) when the Facility Type is NONE.		All
3565	The valid Mail Shape for Parcel Select (Including Lightweight) mail class is Machinable, Nonmachinable or Irregular.		All
3566	The valid Facility Type for Origin Entry appointment is NONE.		All
3568	Sort must be 3-Digit ({0}=T), 5-Digit ({0}=I), or NDC ({0}=AE) when the ProcessingCategory is Machinable or NonMachinable Parcels.		All
3569	Sort must be 5-Digit ({0}=I), Mixed NDC ({0}=AG), NDC ({0}=AE), or SCF ({0}=X) when the ProcessingCategory is Irregular Parcels.		All
3570	Facility does not accept the Parcel Select Traditional appointment with DSCF as Parcel Select Entry Type.		All
3572	Facility does not accept the Parcel Select Traditional appointment with DNDC as Parcel		All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Error Message	Action	Tech Spec Version
	Select Entry Type.		
3575	DSCF/DNDC is not a valid Entry Type for Parcel Select Traditional appointments.		All
3576	Sort must be Mixed NDC ({0} = AG) when the ProcessingCategory is NonMachinable.		All
3577	Sort must be NDC ({0} = AE) or Mixed NDC ({0} = AG) when the ProcessingCategory is Machinable.		All
3578	Sort must be NDC ({0} = AE) or Mixed NDC ({0} = AG) when the ProcessingCategory is Irregular.		All
3584	Scheduled Induction Date is required when a Recurring Appointment [Sequence] ID is provided		All
3586	This appointment can no longer be updated except to reschedule the date/time.		All
3587	This appointment has already been rescheduled once during the late reschedule period and cannot be rescheduled again.		All
3588	This appointment can only be rescheduled up to 72 hours after the original appointment date/time.		All
3589	This appointment has already arrived at the destination facility and can no longer be updated.		All
3590	One-Time PRS Appointments are not allowed to be created with the appointment creation process.	Please change the Appointment to be a recurring PRS Appointment.	All
3591	<0> Recurring PRS Appointments must be scheduled with a frequency of <1> hours apart. <0> will be substituted for type (RADC, RDU, RSCF) <1> will be substituted for hours (96, 48, 24)	Please change the frequency to match the minimum number of hours between instances.	All
3592	Effective Start or End date do not fall within NSA agreement effective dates. Current NSA Start Date: <0>, End Date: <1>.	Please change the effective dates of the RADC Recurring PRS Appointment to fall within the start and end date of the NSA.	All

NOTES:

Return code 3018 refers to the Appointment Scheduling and Management Drop Ship Product Validation Process. The new functionality will provide online validation to verify if the selected facility can accept the mail contents on the requested appointment. FAST will utilize the drop ship product ZIP/CIN file. If an appointment passes the CIN group (mail class/mail shape combinations) validation, normal processing will continue as it does today; however, if it fails the CIN group validation, an error message or warning message will be displayed. The error message will notify the user of the type of content(s) that cannot be accepted at the specified facility and which facility those contents should be redirected to for processing. The warning message will notify the user that potential redirections may exist and provides additional facility information for the user to reference. In both cases, the user is provided a hyperlink to the 'facility profile – additional information' page to view specific redirections.

Return code 3020 is used to indicate the application cannot get a response for this 'TrackingID'. The reason could be the Mailer is using the 'TrackingID' for which they have already obtained a response. This code is supported TMSpec XSD 1.3 and above. This is related to another code, 1502, which indicates the response is not available now and the Mailer needs to come back again later to get a response.

Return code 3021 is used to indicate that the XML message does not contain any USPSSummary blocks in any of the DetailInfo blocks. USPSSummary blocks provide content information, and appointment create, update, and query

Copyright © 2016 USPS®. All Rights Reserved.

messages cannot be processed without content information. Thus, at least one USPSSummary block must be present in at least one DetailInfo block.

Return Codes 3022 and 3023 are used to validate that the Mail Preparer ID and any Mail Owner IDs are valid FAST Scheduler IDs.

Return Codes 3025 and 3026 are not included because they are used for Mail.dat Recurring Content Notifications as Error Codes specific to this message type that FAST sends to the *PostalOne!* system that are.

Return Code 3031 would be returned in a Fault Response.

Return Code 3028 is used to indicate whether the mail class for a mail item is accepted for the appointment. When an appointment shell is created, the Scheduler indicates which Mail Classes are accepted for that appointment. When a DeliveryApptRequest or DeliveryApptUpdateRequest is made, only contents with the same mail class as existing contents for that appointment may be added using the DeliveryContent message request and update types.

Return Code 3034 is used if a Scheduler who is not associated to the same corporation as the Scheduler who created the content attempts to update or cancel the content.

Return Codes 3035 and 3036 are used to validate that the Scheduler ID and Facility ID match the Appointment ID given in a Delivery Content Query message.

Return Code 3037 is returned if a DeliveryApptShellCancelRequest is sent to cancel an appointment that has associated content. The DeliveryApptCancelRequest should be used in this scenario.

Return Code 3140 is only valid for Origin Entry appointments and contents

Return Codes 3142 and 3144 are only applicable for Origin Entry appointment and recurring appointment scheduling.

Return Code 3046 Mailers will receive this error messages if they used incorrect WSDL to send TM V2.0 Appointment messages.

Return Code 3145 is used if the Customer Registration application is down.

Return Code 3146 is used if the Mailer has not registered in FAST or not found in FAST database.

Return Code 3147 is used if the Mailer only entered Scheduler ID or Scheduler Corporate ID.

Return Code 3148 is used if the Mailer sends a duplicate container barcode that has previously been associated to a Full-Service content.

Return Code 3149 is used if the Mailer uses a Customer Registration ID that is not associated to their Mailer in FAST.

Return Code 3150 is used if the Mailer enters an invalid Logistics Customer Registration ID.

Return Code 3151 is used if the Mailer only enters the Logistics Scheduler ID or only the Logistics Corporate Scheduler ID.

4.5 Drop Entry Point Warning Codes and Descriptions

The following CIN Warnings are returned in the ReturnInfo block of accept messages where they occur. This applies to the following message types:

- DeliveryApptCreateAccept Response
- DeliveryApptUpdateAccept Response
- DeliveryApptQuery Response
- DeliveryContentCreateAccept Response
- DeliveryContentUpdateAccept Response

Code	Warning Message	Explanation	Spec
4000	Some < cin group > are accepted at this Facility. Please refer to the Mail Direction Search Report or Drop Ship Product for the correct accepting	If scheduling at a default facility that has a complete redirection, but not all discounts or ZIP Codes (in the case of Delivery Units) are redirected.	All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Warning Message	Explanation	Spec
	facility.		
4001	Some <MailClass/MailShape> are redirected to <Facility>. Please refer to the Mail Direction Search Report or Drop Ship Product for the correct accepting facility.	No action is necessary.	All
4002	< CIN Group > are being redirected to < redirect facility >. The grace period ends <grace date>.	If scheduling at a default facility that has a complete redirection, but the default grace date of this redirection has not yet expired.	All
4003	< cin group > processing will no longer be performed at this facility. Please refer to the Mail Direction Search or Drop Ship Product for the correct accepting facility. The grace period ends <grace date>.	If scheduling at a redirect facility that has an expired complete redirection from a default, but that redirection is still in the grace period.	All
4004	This facility currently accepts <CIN Group>, however, on <redirection start date>; <CIN Group> will be redirected to <redirect facility>. Please adjust your appointments accordingly.	If scheduling at a default facility that currently has no complete redirections, but a new redirection will become active in 75 days or less	All
4005	Some < cin group > redirections to this facility expire before < date redirection expires >. Please refer to the Mail Direction Search Report or Drop Ship Product for the correct accepting facility.	If scheduling at a redirect facility that currently has at least one redirection to it, but at least one of those redirections will expire in 75 days or less	All
4006	Truck lengths <range> <truck length> ft are not accepted at <NASS Code – Facility Name>. If your truck length is <range> <truck length> ft, please create an appointment at <NASS Code – Facility Name>.	If scheduling at a default facility with a truck length that falls within the truck length redirection and the default grace date that has not yet expired.	All
4007	Truck lengths <range> <truck length> ft are not accepted at <NASS Code – Facility Name>. If your truck length is <range> <truck length> ft, please create an appointment at <NASS Code – Facility Name>.	If an appointment is scheduled at a default facility where a truck length redirection exists and is not within the grace period and no truck length is provided for the appointment.	All
4008	Truck lengths <range> <truck length> ft are not accepted at <NASS Code – Facility Name>. If your truck length is <range> <truck length> ft, please refer to the Mail Direction Search Report or Drop Ship Product for the correct accepting facility.	If an appointment is scheduled at a redirect facility where a truck length redirection exists and it is within the grace period.	All
4009	Truck lengths <range> <truck length>ft are not accepted at <NASS Code – Facility Name>. If your truck length is <range> <truck length> ft, please refer to the Mail Direction Search Report or Drop Ship Product for the correct accepting facility.	If an appointment is scheduled at a redirect facility where a truck length redirection exists and it is not within the grace period and no truck length is provided for the appointment.	All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Warning Message	Explanation	Spec
4010	BMC discount for Periodicals is only valid for cross-docked pallets.	If an appointment is scheduled for Palletized Periodicals for BMC discount.	All
4011	< cin group > processing will no longer be performed at this facility. Please refer to the Mail Direction Search or Drop Ship Product for the correct accepting facility. The grace period ends <grace date>.	If an appointment is scheduled at a default facility where the effective end date has expired but is still in the grace period.	All
4012	The Bill of Lading Number, Shipper Name and Vehicle ID will be updated for the following open appointments that are associated to multi-stop id <multi-stop id>: <appointment id list>.	If a leg of a multi-stop appointment is created or updated, and either the Bill of Lading Number, Shipper Name or Vehicle ID is different from the existing corresponding fields for the multi-stop appointment, then this warning will appear.	All
4013	Your recurring appointment request has been successfully created. An email notification of the request has been sent to the facility for review. After review, an email response will be sent to you	If a recurring appointment sequence is updated in such a way that a pending request is created (e.g. content or logistics updated on a recurring appointment sequence which is not pure Periodicals.)	All
4014	Your recurring appointment has been successfully updated. An informational email notification of the approved request has been sent to the facility and the scheduler	If a recurring appointment sequence is updated and auto-approved (e.g. content or logistics updated on a recurring appointment sequence that is pure Periodicals.)	All
4015	This recurring sequence is pending facility approval	If a pending recurring appointment sequence request is returned in a RecurringApptQueryResponseResponse.	All
4017	Your recurring appointment has been successfully created. Your recurring appointment currently has no contents. Appointments will not be generated for this Recurring Appointment while there are no contents.	If a recurring appointment sequence is created/updated and there is no associated content.	All
4018	The requested appointment date and time and in-home date are not in accord with USPS service standards. A shipment with a one day in-home date claiming a NDC discount must be scheduled to arrive by 16:00, five (5) days prior to the specified in-home date.	If USPS Marketable Mail content has an in-home date range of one day and is being scheduled at a facility that accepts NDC USPS Marketable Mail mail.	All
4019	The requested appointment date and time and in-home date are not in accord with USPS service standards. A shipment with a one day in-home date claiming a SCF discount must be scheduled to arrive by 16:00, three (3) days prior to the specified in-home date	If USPS Marketable Mail content has an in-home date range of one day and is being scheduled at a facility that accepts SCF USPS Marketable mail.	All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Warning Message	Explanation	Spec
4020	The requested appointment date and time and in-home dates are not in accord with USPS service standards. A shipment with an in-home date range claiming a NDC discount must be scheduled to arrive by 16:00, five (5) days prior to the second day of the in-home date range.	If USPS Marketable Mail content has an in-home date range of more than one day and is being scheduled at a facility that accepts NDC USPS Marketable Mail.	All
4021	The requested appointment date and time and in-home dates are not in accord with USPS service standards. A shipment with an in-home date range claiming a SCF discount must be scheduled to arrive by 16:00, three (3) days prior to the second day of the in-home date range.	If USPS Marketable Mail content has an in-home date range of more than one day and is being scheduled at a facility that accepts SCF USPS Marketable mail.	All
4030	This Intelligent Mail Container Barcode has previously been associated to a non-Full Service content.	No action necessary.	All
4031	Only 100 contents have been returned. To see all stale content, please go to *PostalOne!* and subscribe to the Stale Content Push Messages.		10.0 and newer
4032	Only 100 contents have been returned. To see all updated content, please go to *PostalOne!* and subscribe to the USPS Delivery Content Updated Push Messages.		10.0 and newer
4034	Update refused - Duplicate contents referenced in request.		All

The following warnings are returned in the ReturnInfo block of accept messages where they occur. This applies to the following message types:

- DeliveryApptCancelCreateResponse
- DeliveryApptCreateAcceptResponse
- DeliveryApptUpdateAcceptResponse
- DeliveryApptQueryResponse

Code	Warning Message	Explanation	Spec
4022	Content was not cancelled – it is past the editable time threshold. However, containers for the specified contents have been released for scheduling in other appointments.	If attempting to cancel an appointment and containers less than one hour before the scheduled appointment date/time, or after the scheduled appointment date/time.	All
4023	Your recurring appointment cannot start on {date} due to constraint limitations. Your recurring appointment will now begin on {date}.	If scheduling at a facility where constraint limitations prevent the instances from beginning on the recurring appointment sequence start date.	All
4024	In Home Dates are not applicable to Recurring Appointment Series	If including in-home dates when creating/updating a recurring appointment, this warning message will be returned	All

Copyright © 2016 USPS®. All Rights Reserved.

Code	Warning Message	Explanation	Spec
4025	Appointment <appointment ID> cannot be cancelled, past appointment editable time threshold. Contents/containers of the appointment has been cancelled for scheduling in other appointments.	If attempting to cancel an appointment and containers less than one hour before the scheduled appointment date/time, or after the scheduled appointment date/time.	All
4026	Your recurring appointment has been successfully created. An informational email notification of the approved request has been sent to the facility and the scheduler	If a recurring drop ship appointment is created via a Delivery Appointment Create Request message.	All
4027	Your search did not return any results	If a query message does not return search results.	All
4028	The effective end date of your appointment has been updated to be in sync with the drop entry dates of the facility. The new effective end date is <DATE>. Please see the Mail Direction Search for more details.	If the effective end date of a drop shipment recurring appointment is automatically adjusted to be in sync with redirection dates.	All
4029	Warning! If you have a CSA at your old facility, please verify if your CSA is still valid.	If an Origin Entry recurring appointment is updated to be scheduled at a different facility than where it was created.	All

Please note that any error or warning messages listed above will be limited to the acceptable field lengths provided in the Mail.XML Specification. This could cause a message to be truncated if it exceeds the acceptable field length.

4.6 Fault Codes

Faults, such as a message timeout or invalid XML are to be communicated using the <fault element and returned within the detail section of the SOAP fault. The fault is made up of a tracking ID and one or more fault codes and optional fault descriptions.

Below is the list of fault codes that are applicable to all Mail.XML messages, they are sent whenever a fault occurs in the transmission of the message.

Code	Description	Messages
314	Generic Error code	Fault (All Mail.XML Messages)
402	Not Well Formed XML	Fault (All Mail.XML Messages)
403	Validation Failure – {specific error message thrown by parser}	Fault (All Mail.XML Messages)
412	Unauthorized – Required SubmittingParty	Fault (All Mail.XML Messages)
412	Unauthorized – User does not have access to specified SubmittingParty	Fault (All Mail.XML Messages)
412	Unauthorized – User does not have access to “Manage Mailing Activity” service	Fault (All Mail.XML Messages)
412	Unauthorized - Invalid user ID	Fault (All Mail.XML Messages)
412	Unauthorized - Invalid user password	Fault (All Mail.XML Messages)
412	Unauthorized - Account disabled	Fault (All Mail.XML Messages)
412	Unauthorized - Maximum password retries reached	Fault (All Mail.XML Messages)
412	Unauthorized - Profile not found	Fault (All Mail.XML Messages)
440	Sorry - Mail.XML version is not supported	Fault (All Mail.XML Messages)
500	Generic Internal Responder Error	Fault (All Mail.XML Messages)
500	Your request has been accepted for processing by USPS. Use the attached Tracking ID with a MessageResponseRetrievalRequest message to get the status of your request.	Fault (All Mail.XML Messages)
501	This Mail.XML request for Message XXXX with SubmitterTrackingID nnnnnn was not processed by Mail.XML application because an identical request was received on mm/dd/yyyy hh:mm:ss and was assigned TrackingID of	Fault (All Mail.XML Messages)

Copyright © 2016 USPS®. All Rights Reserved.

Code	Description	Messages
	mmmmmmm. Please use the MRRR message with Tracking ID mmmmmm to retrieve.	
503	Not Implemented - Mail.XML message received is not supported (MessageName)	Fault (All Mail.XML Messages)

4.7 Support Mailer SubmitterTrackingID on MailXML 14.0A Messages

MailXML 14.0A messages support 'SubmitterTrackingID' on MailXML request message. If the value is set by the mailer, the *PostalOne!* system will make use of this to identify the duplicate requests, avoid processing the duplicate messages submitted. The sections given below discuss more details on MailXML Service Layer and Target Apps processing 'SubmitterTrackingID'.

4.7.1 Business Rules/ Assumptions:

1. MailXML 14.0A messages support 'SubmitterTrackingID' on MailXML request message. If the value is set by the mailer, the *PostalOne!* system will make use of this to identify the duplicate requests, avoid processing the duplicate messages submitted. The sections given below discuss more details on MailXML Service Layer and Target Apps processing 'SubmitterTrackingID'.
2. Mailers provide a SubmitterTrackingID as part of their request messages.
3. SubmitterTrackingID is currently required in the Mail.XML specification.
4. The *PostalOne!* system will use the SubmitterTrackingID to ensure that Mailer's requests were processed one time only by Mail.XML and target applications
5. Mailer must provide a unique combination of SubmitterTrackingID/MessageName for 45 days in order to support these requirements.
6. The *PostalOne!* system will use the combination of UserID/SubmitterTrackingID/ MessageName to identify duplicate requests from the Mailers. Please note that the business requirements call for 48 hours but we recommend 45 days to be consistent with other Full Service uniqueness requirements.
7. The *PostalOne!* applications will include the SubmitterTrackingID in Mail.XML responses and error messages.
8. The *PostalOne!* applications generate responses or error messages for all Mail.XML requests.
9. The *PostalOne!* applications will use the following elements to identify and handle duplicate requests:

   UserID
   MessageName
   TrackingID (MailXML app assigns this)
   SubmitterTrackingID (assigned by the Mailer)
   RequestReceived DateTime (MailXML app assigns this)

10. Duplicate messages will only be identified for mailers who are providing SubmitterTrackingIDs in their requests.
11. If no response was received from the target application for a given request during 48 hours window. The request will be considered as obsolete and no response will be provided using MRRR. An error message will be provided back to the Mailer in the MRRR response as follows:

Sample given below for MailXML 14.0A

```
<mailxml:MessageResponseRetrievalResponse xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://idealliance.org/Specs/mailxml14.0a/mailxml mailxml_14.0a.xsd "
xmlns:mailxml="http://idealliance.org/Specs/mailxml14.0a/mailxml"
xmlns:mailxml_base="http://idealliance.org/Specs/mailxml14.0a/base"
xmlns:mailxml_defs="http://idealliance.org/Specs/mailxml14.0a/mailxml_defs">
<mailxml:MessageResponseRetrievalReject mailxml:TrackingID="5400000000000000001">

    <mailxml:ReturnInfo>
    <mailxml_defs:ReturnCode>1510</mailxml_defs:ReturnCode>
    <mailxml_defs:ReturnDescription>The TrackingID provided in the MRRR request was processed by Mail.XML
    application on mm/dd/yyyy hh:mm:ss. No response was received by Mail.XML from the target application.
    Please re-submit a new request or contact the HelpDesk for more investigation to the issue preventing the
    target application from generating the response</mailxml_defs:ReturnDescription>
```


Copyright © 2016 USPS®. All Rights Reserved.

```
        </mailxml:ReturnInfo>
    </mailxml:MessageResponseRetrievalReject>
</mailxml:MessageResponseRetrievalResponse>
```

4.7.2 Possible Scenarios for using and identifying duplicate requests:

Scenario-1:

Mailer sends original request followed by another identical request. While Mail.XML is processing the duplicate request, the response is available for the original request.

1. Mailer sends the first request with a unique SubmitterTrackingID.
2. MailXML application receives the request, captures the information below and routes the request to the target application for processing

    UserID
    MessageName
    TrackingID (MailXML app assigns this)
    SubmitterTrackingID (assigned by the Mailer)
    RequestReceived DateTime (MailXML app assigns this)

3. Mailer sends the second request with the same SubmitterTrackingID.
4. MailXML application checks the request, assigns TrackingID and performs validation for the duplicate message.
5. If it is a duplicate message MailXML will not forward request to the target application. An error message will be generated by the Mail.XML application and returned back to the mailer as follows:

    "This Mail.XML request for Message XXXX with SubmitterTrackingID nnnnnn was not processed by Mail.XML application because an identical request was received on mm/dd/yyyy hh:mm:ss and was assigned TrackingID of mmmmmmm. Please use the MRRR message with Tracking ID mmmmmm to retrieve the response"

Sample Given below for MailXML 14.0A.

```
<mailxml:Fault  xmlns:mailxml="http://idealliance.org/Specs/mailxml14.0a/mailxml"
xmlns:mailxml_base="http://idealliance.org/Specs/mailxml14.0a/base"
xmlns:mailxml_defs="http://idealliance.org/Specs/mailxml14.0a/mailxml_defs"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://idealliance.org/Specs/mailxml14.0a/mailxml mailxml_14.0a.xsd ">

    <mailxml:FaultCode>501</mailxml:FaultCode>
    <mailxml:FaultDescription>This Mail.XML request for Message XXXX with SubmitterTrackingID nnnnnn was
    not processed by Mail.XML application because an identical request was received on mm/dd/yyyy hh:mm:ss
    and was assigned TrackingID of mmmmmmm. Please use the MRRR message with Tracking ID mmmmmm
    to retrieve.</mailxml:FaultDescription>

</mailxml:Fault>
```

6. Mailer to use MRRR message with TrackingID mmmmmm to retrieve the responses.

Scenario-2:

Mailer sends original request followed by another identical request. No response is made available by the target application for the original request.

1. Mailer sends the first request with a unique SubmitterTrackingID.
2. MailXML application receives the request, captures the information below and routes the request to the target application for processing

    UserID
    MessageName
    TrackingID (MailXML app assigns this)
    SubmitterTrackingID (assigned by the Mailer)

Copyright © 2016 USPS®. All Rights Reserved.

RequestReceived DateTime (MailXML app assigns this)

3. Mailer sends the second request with the same SubmitterTrackingID.
4. MailXML application checks the request, assigns TrackingID and performs validation for the duplicate message.
5. If it is a duplicate message MailXML will not forward request to the target application. An error message will be generated by the Mail.XML application and returned back to the mailer as follows:

Sample Given below for MailXML 14.0A.

```
<mailxml:Fault  xmlns:mailxml="http://idealliance.org/Specs/mailxml14.0a/mailxml"
xmlns:mailxml_base="http://idealliance.org/Specs/mailxml14.0a/base"
xmlns:mailxml_defs="http://idealliance.org/Specs/mailxml14.0a/mailxml_defs"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://idealliance.org/Specs/mailxml14.0a/mailxml mailxml_14.0a.xsd ">

    <mailxml:FaultCode>501</mailxml:FaultCode>
    <mailxml:FaultDescription>This Mail.XML request for Message XXXX with SubmitterTrackingID nnnnnn was
    not processed by Mail.XML application because an identical request was received on mm/dd/yyyy hh:mm:ss
    and was assigned TrackingID of mmmmmmm. Please use the MRRR message with Tracking ID mmmmmm
    to retrieve.</mailxml:FaultDescription>

</mailxml:Fault>
```

6. Mailer uses MRRR message with TrackingID mmmmmm to retrieve the responses.
7. Target Applications generate the response for the initial/first Request. Mail.XML application will generate a Come Back Later message if no response is available.

4.8 Web Service Additional Constraints

In addition to conforming to everything stated in the WSDL file, all XML inputs to the Appointment Services operations must qualify the XML elements and attributes with their associated namespace. As an example, following is a good ApptResponseRetrieval input message to the operation RetrieveAppointmentResponses:

4.9 Message Response Retrieval Request Processing

The *PostalOne!* system will generate the response to a MessageResponseRetrievalRequest (MRRR).

The *PostalOne!* system will provide the Web Services users with the capability to re-request message responses using the generated Tracking IDs multiple times with a MRRR within 30 days of initial response receipt from FAST. The *PostalOne!* system will provide the users with the latest response from FAST if there are multiple appointment responses for the same TrackingID. The following messages will be supported in the Message Response Retrieval Request processing:

- CustomerSupplierAgreementQueryResponse
- DeliveryApptQueryResponse
- DeliveryApptCreateResponse
- DeliveryApptCancelResponse
- DeliveryApptCancelCreateResponse
- DeliveryApptUpdateResponse
- DeliveryApptShellCreateResponse
- DeliveryApptShellUpdateResponse
- DeliveryContentCreateResponse
- DeliveryContentUpdateResponse
- DeliveryContentCancelResponse
- DeliveryContentQueryResponse
- Fault

Copyright © 2016 USPS®. All Rights Reserved.

- RecurringApptQueryResponse
- AllApptCloseoutResponse
- PartnerApptQueryResponse

4.10 SchedulerContent ID

The *PostalOne!* system (Mail.XML Web Services) will generate SchedulerContent ID only if the mailer has set the 'IncludeInSummarizationblock' to 'No'. Mail.XML Web Services will generate the USPS Summary Block and reference Scheduler Content ID. The Scheduler Content ID will be an alphanumeric of the format P###... (P and a sequence number containing up to 11 digits). The prefixing is used to inform FAST that this Scheduler Content ID has been generated by Mail.XML Web Services. Customer will be provided an up to 12-digit number if they are populating this information in the appointment message.

4.11 Closeout Messages

FAST will generate closeout messages for each appointment. The Mail.XML version used to generate the message will be determined as follows:

Closeout messages will be generated by FAST using the latest version used to create or update the appointment. If the latest specification version used to create or update the appointment is no longer supported, the latest supported version for which the scheduler is approved will be used for the closeout message. For example, if an appointment was created using an earlier version of Mail.XML, then updated using a later version of Mail.XML, then the ConsigneeGoodsReceipt will be generated using the later version. If an appointment is created/updated using an earlier version of Mail.XML and never updated using a later version of Mail.XML, the ConsigneeGoodsReceipt will be generated using the earlier version.

If the scheduler has completed testing for the latest version of Mail.XML, the ConsigneeGoodsReceipt will be generated using that version. If the scheduler has completed testing for previous versions and the latest version, the ConsigneeGoodsReceipt will be generated using highest certified Mail.XML. Additionally, Mail Owners and Mail Preparers that have completed testing for newer Mail.XML specifications, will receive ConsigneeGoodsReceipt messages for appointments with which they are associated. Messages sent to Mail Owners and Mail Preparers will be sent using the most current Mail.XML specification the Mail Owner or Mail Preparer has used for completing tests.

Closeout messages for unscheduled appointments will be generated using the latest supported version of Mail.XML for which the scheduler has completed testing.

If the scheduler has completed testing for a specific version of Mail.XML, then the UnscheduledConsigneeGoodsReceipt will be generated using that version. If the scheduler has completed testing for different versions, then the UnscheduledConsigneeGoodsReceipt will be generated using highest certified Mail.XML.

The total number of 'consignee goods receipts' and 'unscheduled consignee good receipts' included in a closeout response is currently set to a maximum of 200 messages per response.

4.11.1 How Closeout Data for MailOwner and MailPreparer are Disseminated

Currently, mail owner and mail preparer, if they are not the scheduler of the appointment, can only get the close out data of the appointment if they are identified as the mail owner and or preparer of the content, which belongs to the appointment.

4.12 Identifying Mail Owner and Mail Preparer in Appointment Messages

The Mail Owner can be identified in the appointment create and update messages in the USPSContainerInfo block of Pallets block of USPSSummary block of DetailInfo of the DeliveryApptCreateRequest and DeliveryApptUpdateRequest messages.

The Mail Preparer can be identified in USPSSummary block of DetailInfo Block of DeliveryApptCreateRequest and DeliveryApptUpdateRequest messages.

4.13 Identifying Mail Owner and Mail Preparer in Content Messages

The Mail Owner can be identified in the content create and update messages in the USPSContainerInfo block of Pallets block of ContentUSPSSummary block of ContentDetailInfo block of DeliveryContentCreateRequest and DeliveryContentUpdateRequest messages.

The Mail Preparer can be identified in the ContentUSPSSummary block of ContentDetailInfo block of DeliveryContentCreateRequest and DeliveryContentUpdateRequest messages.

Copyright © 2016 USPS®. All Rights Reserved.

Please note that the ContentDetailInfo block is named as "ContentDetailInfoUpdate" block in the DeliveryApptUpdateRequest message.

Note: *Scheduler ID and CRID are the valid IDs allowed to Identify MailOwner and MailPreparer*

Scheduler or content provider can provide the Scheduler ID OR CRID of Mail Owner and/or Mail Preparer in the above mentioned elements used for identifying mail owner and mail preparer.

4.14 Appointment Shell Cancellation Messages

FAST will support the cancellation of Appointment Shells using both the Delivery Appointment Shell Cancel Request message and Delivery Appointment Cancellation Request Message. Additionally, appointments with contents can be cancelled using both the Delivery Appointment Shell Cancel Request message and the Delivery Appointment Cancellation Request Message. Recurring appointment shells can only be cancelled using the Delivery Appointment Shell Cancel request.

4.15 *PostalOne!* - FAST Web Services Authentication:

- The *PostalOne!* system will only provide username and password validation for Web Services messages sent to FAST. The *PostalOne! system* will set the CRID of the user identified by the username and password in the JMS header of FAST-supported messages. FAST shall authenticate the user CRID is associated to the Scheduler ID or Scheduler CRID from the header of the message. FAST will support Submitting Party-based security for the messages listed below. All other messages sent to FAST will continue to support the existing SchedulerID/SchedulerCorpID/SchedulerCRID authentication in the Submitting Party block by the FAST *system* for the DeliveryContentQueryRequest message.
- SchedulerID and/or Scheduler CRID in the Submitting Party block will be authenticated by FAST for the RecurringApptQueryRequest message.
- SchedulerID and/or Scheduler CRID in the Submitting Party block will be authenticated by FAST for the PartnerApptQueryRequest message
- SchedulerID and/or Scheduler CRID in the Submitting Party block will be authenticated by FAST for the CustomerSupplierAgreementQueryRequest message.
- FAST shall validate the user CRID is associated with the SchedulerID and CRID (if provided) for the FAST Business Service against in the Customer Registration system for the following messages:
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentCreateRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentUpdateRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentCancelRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentQueryRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentCancelCreate message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryContentCreateRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryContentUpdateRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryContentCancelRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentShellCreateRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentShellUpdateRequest message.

Copyright © 2016 USPS®. All Rights Reserved.

- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the DeliveryAppointmentShellCancelRequest message.
- CreatorSchedulerID/CreatorSchedulerCorpId and/or CreatorSchedulerCRID in the message header will be authenticated by FAST for the RecurringApptQueryRequest message.
- SchedulerID/SchedulerCorpId and/or SchedulerCRID in the message header will be authenticated by FAST for the PartnerApptQueryRequest message.

Copyright © 2016 USPS®. All Rights Reserved.

5. Appendix A - Mail.XML 14.0A Complex Types

FAST Complex Types Data Structures

Note: *Final Mail.XML version to be confirmed by the USPS after design is completed*

In this Appendix A, the Complex Types are the data structure for Mail.XML for FAST messages have been derived from the XSD specification.

5.1 Complex Type: ActualBedLoadType

Provides the actual count and actual percentage for a FAST bedload value

Mail.XML 14.0A - Complex Type: ActualBedLoadType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ActualBedLoadType BEGINS				
HandlingUnit (as attribute)	palletHandlingUnitTyp e simple type	-	Required (Attribute)	Refer to this simple type in Appendix B
Choice Block BEGINS				
ActualBedloadPercen t	nonNegativeInteger		Required	
ActualBedloadCount	nonNegativeInteger		Required	
Choice Block ENDS				
ActualBedLoadType ENDS				

5.2 Complex Type: actualPalletType

Provides the actual count for a FAST pallet value

Mail.XML 14.0A - Complex Type: actualPalletType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
actualPalletType BEGINS				
HandlingUnit (as attribute)	palletHandlingUnitype simple type	-	Required (Attribute)	Refer to this simple type in Appendix B
ActualPalletCount	nonNegativeInteger	-	Required	-
actualPalletType ENDS				

5.3 Complex Type: addressType

Mail.XML 14.0A - Complex Type: addressType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
addressType BEGINS				
CommunicationRole	Mailxml_base:Comm unicationRoleType	Refer to the simple type	This is an attribute element	Refer to this simple type in Appendix B
Address1	Mailxml_base:s64	-	Required	-
Address2	Mailxml_base:s64	-	Optional	-
Address3	Mailxml_base:s40	-	Optional	-
Addres4	Mailxml_base:s40	-	Optional	-
City	Mailxml_base:s45	-	Required	-
County	Mailxml_base:s45	-	Optional	-
State	Mailxml_base:stateCo	See comments	Required	Refer to this simple

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: addressType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
	de			type in Appendix B
ZipCode	Numeric Strong 9	9 digits zip	Required	-
GPSCoordinates	gPSCoordinates complex type	-	Optional	Refer to this complex type in Appendix A

5.4 Complex Type: allDeliveryApptCloseoutAcceptType

Mail.XML 14.0A - Complex Type: allDeliveryApptCloseoutAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
allDeliveryApptCloseoutAcceptType BEGINS				
StatusRequestMsgHeaderInfo	StatusRequestMsgHeaderInfo attribute	-	Required	Refer to this attribute block in Appendix A
Sequence Block BEGINS				
ConsigneeGoodsReceipt	ConsigneeGoodsReceipt data structure in Section 5		Optional 0 to many allowed	The data structure is outlined in Section 5. Refer to that section.
UnscheduledConsigneeGoodsReceipt	UnscheduledConsigneeGoodsReceipt		Optional 0 to many allowed	The data structure is outlined in Section 5. Refer to that section.
Sequence block ENDS				
allDeliveryApptCloseoutAcceptType ENDS				

5.5 Complex Type: apptBlockGoodsType

ApptBlockGoodsType block is a block that FAST shall send all the closeout information of the appointment to *PostalOne!*

Mail.XML 14.0A - Complex Type: apptBlockGoodsType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
apptBlockGoodsType BEGINS				
MailClass	mailClassType simple type	-	Required 1 to many allowed	Refer to this simple type in Appendix B
DestinationEntry	yesNo simple type	Either Yes or No	Required	This field allows mailers to specify whether the mailing is origin entered or drop ship.
ScheduledConsigneeFacility	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
ActualConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
ScheduledAppt	DateTime	YYYY-MM-DDTHH:MM:SS	Required	
ActualTruckArrival	DateTime	YYYY-MM-DDTHH:MM:SS	Optional	
StartTheClockDate	Date	YYYY-MM-DD	Optional	-
ActualStartUnload	DateTime	YYYY-MM-	Optional	

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: apptBlockGoodsType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
		DDTHH:MM:SS		
ActualEndUnload	DateTime	YYYY-MM-DDTHH:MM:SS	Optional	
ApptStatus	apptStatusType simple type	-	Required	Refer to this simple type in Appendix B
Sequence Block BEGINS				
ContainerID	String 6	-	Optional 0 to many allowed	-
ContainerType	mailXMLContainerType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
Choice Block BEGINS			Either IMcb or IMtb	
IMcb	IMcbType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
IMtb	IMtbType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
IMpb	IMpbType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
Choice Block ENDS				
Sequence Block ENDS				
ApptMethod	apptMethodType simple type	-	Required	Refer to this simple type in Appendix B
USPSDetail	uspsDetailType complex type	-	Optional, refer to USPSDetailType	Refer to this complex type in Appendix A
VerificationLocation	verificationLocationType simple type	-	Optional	Refer to this simple type in Appendix B
TransportationMethod	transportationMethodType simple type	-	Optional	Refer to this simple type in Appendix B
ActualTotalPalletCount	nonNegativeInteger	-	Optional	-
ActualPalletCount	actualPalletType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
Choice Block BEGINS				
EvsSamplingTime	DateTime	YYYY-MM-DDTHH:MM:SS	Optional	
EFileSamplingTime	eFileSamplingTimeType complex type	-	Optional. 0 to many allowed	Refer to this complex type in Appendix A
Choice Block ENDS				
Irregularities	closeoutIrregualritiesType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
Resolution	closeoutResolutionType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
ActualBedload	actualBedloadType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
ExemptionCode	exceptionCodeType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
ValueAddedService	String		Optional	Refer to this simple type in Appendix B
apptBlockGoodsType ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.6 Complex Type: apptBlockUnscheduledGoodsType

Mail.XML 14.0A - Complex Type: apptBlockUnscheduledGoodsType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
apptBlockUnscheduledGoodsType BEGINS				
MailClass	mailClassType simple type	-	Required 1 to many allowed	Refer to this simple type in Appendix B
ActualConsigneeFacility	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
ActualTruckArrival	DateTime	YYYY-MM-DDTHH:MM:SS	Optional	
StartTheClockDate	Date	YYYY-MM-DD	Optional	-
ActualStartUnload	DateTime	YYYY-MM-DDTHH:MM:SS	Optional	
ActualEndUnload	DateTime	YYYY-MM-DDTHH:MM:SS	Optional	
ApptStatus	apptStatusType simple type	-	Required	Refer to this simple type in Appendix B
Irregularities	closeoutIrregualritiesType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
Resolution	closeoutResolutionType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
ActualBedload	actualBedloadType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
ActualTotalPalletCount	NonNegativeInteger	-	Optional	-
ActualPalletCount	actualPalletType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
ValueAddedService	String		Optional	Refer to this simple type in Appendix B
apptBlockUnscheduledGoodsType ENDS				

5.7 Complex Type: apptBlockRequestType

ApptBlockRequestType is a block that contains several blocks with specific information for scheduling an appointment in FAST.

Mail.XML 14.0A - Complex Type: apptBlockRequestType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
apptBlockRequestType BEGINS				
ConsigneeFacility	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
PreferredAppt	dateTime	-	Required	-
OptionalAppt	optionalApptType complex type	-	Optional. 0 to many allowed	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
apptBlockRequestType ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.8 Complex Type: apptBlockUpdateType

Mail.XML 14.0A - Complex Type: apptBlockUpdateType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
apptBlockUpdateType BEGINS				
ConsigneeFacility	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
PreferredAppt	dateTime	-	Required	-
OptionalAppt	dateTime	-	Optional. 0 to many allowed	-
ETA	dateTime	-	Optional	-
Comment	String 256	-	Optional	-
apptBlockUpdateType ENDS				

5.9 Complex Type: apptInfoType

Mail.XML 14.0A - Complex Type: apptBlockUpdateType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
apptInfoType BEGINS				
sequence BEGINS				
ApptConsigneeID	s12			
ApptState	apptStateType			
ScheduledAppt				
ActualTruckArrival				
ActualStartUnload			Optional	
ActualEndUnload			Optional	
ApptCloseOutDetail	apptCloseoutDetailType			
Sequence ENDS				
complexType ENDS				

5.10 Complex Type: availableSlotType

AvailableSlotType block is a block that provides specific information about available date/time for scheduling appointments at the facility requested.

Mail.XML 14.0A - Complex Type: availableSlotType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
availableSlotType BEGINS				
MailClass	mailClassType simple type	-	Required 1 to many allowed	Refer to this simple type in Appendix B
Perishable	Mailxml_base:yesNo	-	Optional	-
AvailableHours	availableHourType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
availableSlotType ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.11 Complex Type: availableHourType

AvailableHourType block is a block that provides specific information about available date/time for scheduling appointments at the facility requested.

Mail.XML 14.0A - Complex Type: availableHourType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
availableHourType BEGINS				
PreferredAppt (as attribute)	DateTime	YYYY-MM-DDTHH:MM:SS	Optional (attribute)	-
AvailableSlots	String 2	-	Optional (attribute)	-
availableHourType ENDS				

5.12 Complex Type: basicReturnInfoType

Mail.XML 14.0A - Complex Type: basicReturnInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
basicReturnInfoType BEGINS				
Sequence Block BEGINS			Optional 0 to many blocks are allowed	
ReturnCode	Numeric String 4	Only numeric string allowed	Optional	-
ReturnDescription	String 260	-	Required	-
ErrorWarning	ErrorWarningType complex type	-	Optional	Refer to this complex type in Appendix A
ContainerErrorWarningBlock	ContainerErrorWarningBlockType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
basicReturnInfoType ENDS				

5.13 Complex Type: bedloadUnitType

BedloadUnitType is a block that provides specific information for the handling unit and type for bedload content.

Mail.XML 14.0A - Complex Type: bedloadUnitType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
bedloadUnitType BEGINS				
USPSContainerInfo	uspsContainerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
Choice Block BEGINS			Required Choice block 1 to many allowed One of the following blocks are required: Sacks; Trays; Parcels; Bundles	
Sacks	bedloadHandlingUnitType complex type	-	Required	Refer to this complex type in Appendix A
Trays	trayHandlingUnitType complex type	-	Required	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Parcels	bedloadHandlingUnit Type complex type	-	Required	Refer to this complex type in Appendix A
Bundles	bedloadHandlingUnit Type complex type	-	Required	Refer to this complex type in Appendix A
Sequence Block ENDS				
bedloadUnitType ENDS				

5.14 Complex Type: bedloadHandlingUnitType

BedloadHandlingUnitType provides the specific presort level count of bedload for each content when scheduling the appointment in FAST.

Mail.XML 14.0A - Complex Type: bedloadHandlingUnitType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
bedloadHandlingUnit Type BEGINS				
Count (as attribute)	nonNegativeInteger		Required (attribute)	
PreSortLevel Block BEGINS				
MaildatCode (as attribute)	ContainerLevelType simple type	-	Required	Refer to this simple type in Appendix B
Count (as attribute)	nonNegativeInteger	-	Required	-
PreSortLevel Block ENDS				
IMpb	IMpbType simple type	-	Optional	Refer to this simple type in Appendix B
IMtb	IMtbType simple type	-	Optional	Refer to this simple type in Appendix B
bedloadHandlingUnit Type ENDS				

5.15 Attribute Type: CancelCreateMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: CancelCreateMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
CancelCreateMsgHeaderInfo BEGINS			Attributes block	
ShipperApptRequestID	Mailxml_base:s12		Required	
ConsigneeApptID	Mailxml_base:s12		Optional	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
SchedulerCRID	Mailxml_base:CRIDType		Optional	Refer to “CRIDType” simple type in Appendix B
ShipperMultiStopID	Mailxml_base:s12		Optional	
ConsigneeMultiStopID	Mailxml_base:s12		Optional	
ShipperStopNumber	Mailxml_base:ns06		Optional	
ApptType	Mailxml_base:apptTypeType		Required	Refer to “apptTypeType” simple type in Appendix B
PickupOrDelivery	Mailxml_base:pickupOrDeliveryType		Optional	Refer to “PickupOrDeliveryType” simple type in Appendix B
PalletPositionCount	Mailxml_base:ns02		Optional	

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Attribute Type: CancelCreateMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
TransferAllContent	Mailxml_base:yesNo	-	Required	This flag indicates whether the content of the previous message should be transferred for use in the new create message.
CancelCreateMsgHeaderInfo ENDS				

5.16 Complex Type: carrierType

CarrierType is a block that contains information for the carrier or transporter of the mail.

Mail.XML 14.0A - Complex Type: carrierType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
carrierType BEGINS				
CarrierName	String, 40 characters		Required	
CarrierCRID	String 15 CRID Type		Optional	Refer to this complex type in Appendix A below
CarrierAddress	addressType complex type		Optional	Refer to this complex type in Appendix A below
URL	Xs:anyURL		Optional	
CommonContact	commonContactType complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A below
carrierType ENDS				

5.17 Complex Type: containerErrorWarningBlockType

Mail.XML 14.0A - Complex Type: containerErrorWarningBlockType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
containerErrorWarningBlockType BEGINS				
ConsigneeContainerGroupingID	String 16	-	Optional	-
ConsigneeContentID	String 12	-	Optional	Refer to this simple type in Appendix B
ShipperContainerGroupingID	String 16	-	Optional	-
IMcb	IMcbType simple type	-	Optional	Refer to this simple type in Appendix B
IMtb	IMtbType simple type	-	Optional	Refer to this simple type in Appendix B
IMpb	IMpbType simple type	-	Optional	Refer to this simple type in Appendix B
MailContentName	String 30	-	-	-
SchedulerContentID	String 12	-	-	-
containerErrorWarningBlockType ENDS				

5.18 Complex Type: contentCancelType

ContentCancelType is a block that provides specific content information to cancel the unwanted contents.

Mail.XML 14.0A - Complex Type: contentCancelType

Copyright © 2016 USPS®. All Rights Reserved.

Field	Format	Acceptable Values	Business Rules	Comment
contentCancelType BEGINS				
Attribute Block BEGINS				
SchedulerContentID	String, 12 characters		Required (attribute)	
ConsigneeContentID	String, 12 characters		Required (attribute)	
ConsigneeApptID	String, 12 characters		Optional (attribute)	
Attribute block ENDS				
ReturnInfo	optreturnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
contentCancelType ENDS				

5.19 Complex Type: contentDetailInfoType

ContentDetailInfoType is a block that contains several blocks of information including a block for content information in FAST.

Mail.XML 14.0A - Complex Type: contentDetailInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
contentDetailInfoType BEGINS				
Attribute Block BEGIN				
LogisticsSchedulerID	String, 12 characters		Optional (attribute)	
LogisticsCorpID	String, 12 characters		Optional (attribute)	
LogisticsSchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
Attribute Block ENDS				
ShipperContainerGroupingID	String 16	-	Optional	-
ConsigneeContainerGroupingID	String, 16 characters	-	Optional	-
ShipperGroupingIDDescription	String, 50 characters	-	Optional	-
ScheduledInductionDate	Date	YYYY-MM-DD	Optional	-
NumberofDaysStale	Numeric String 2	-	Optional	-
Choice Block BEGINS			Either Maildat Summary or ContentUSPSSummary block data is required. User can provide 1 to many blocks	
MailDatSummary	maildatSummaryType complex type		Required	Refer to this complex type in Appendix A
ContentUSPSSummary	contentUSPSSummaryType complex type		Required	Refer to this complex type in Appendix A
Choice Block ENDS				
contentDetailInfoType ENDS				

5.20 Complex Type: contentDetailInfoUpdateType

Mail.XML 14.0A - Complex Type: contentDetailInfoUpdateType

Copyright © 2016 USPS®. All Rights Reserved.

Field	Format	Acceptable Values	Business Rules	Comment
contentDetailInfoUpdateType BEGINS				
Attribute Block BEGIN				
LogisticsSchedulerID	String, 12 characters		Optional (attribute)	
LogisticsCorpID	String, 12 characters		Optional (attribute)	
LogisticsSchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
Attribute Block ENDS				
ShipperContainerGroupingID	String 16	-	Optional	-
ConsigneeContainerGroupingID	String, 16 characters	-	Optional	-
ShipperGroupingIDDescription	String, 50 characters	-	Optional	-
ScheduledInductionDate	Date	YYYY-MM-DD	Optional	-
Choice Block BEGINS			Either Maildat Summary or ContentUSPSSummary block data is required. User can provide 1 to many blocks	
MailDatSummary	maildatSummaryType complex type		Required	Refer to this complex type in Appendix A
ContentUSPSSummary	contentUSPSSummaryType complex type		Required	Refer to this complex type in Appendix A
Choice Block ENDS				
contentDetailInfoUpdateType ENDS				

5.21 Complex Type: contentUSPSSummaryType

contentUspsSummaryType is a block that contains specific information and other blocks for a content when scheduling an appointment in FAST.

Mail.XML 14.0A - Complex Type: contentUSPSSummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
contentUspsSummaryUpdate Type BEGINS				
Attribute block BEGINS				
SchedulerContentID	String, 12 characters		Required (attribute)	
ConsigneeContentID	String. 12 characters		Optional (attribute)	
Attribute block ENDS				
DestinationDiscountIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
ZoneSkippingIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
FullServiceIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Optional	Refer to this simple type in Appendix B
Pallets	palletUnitType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
Bedload	bedloadUnitType complex type	-	Optional	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: contentUSPSSummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
Perishable	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
MailClass	mailClassType simple type	See simple type values	Required	Refer to this simple type in Appendix B
RateType	RateType simple type	See simple type values	Optional	Refer to this simple type in Appendix B
InHomeStart	dateTime	YYYY-MM-DDTHH:MM:SS	Optional	
InHomeEnd	dateTime	YYYY-MM-DDTHH:MM:SS	Optional	
ProcessingCategory	processingCategoryType simple type	-	Required	Refer to this simple type in Appendix B
PriorityMailIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
VerificationLocation	verificationLocationType simple type	-	Required	Refer to this simple type in Appendix B
NewsIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
EvsIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Optional	Refer to this simple type in Appendix B
MailContentName	String, 30 characters		Optional	
MailPreparerID	String, 12 characters		Optional	
MailPreparerCRID	CRIDTYpe simple type	-	Optional	Refer to this simple type in Appendix B
AdvanceMailingID	String, 9 characters		Optional 0 to many allowed	
EFileNumber	String, 22 characters		Optional	
ContainsAutoMail	Mailxml_base:yesNo	Only Yes or No allowed	Optional	Refer to this simple type in Appendix B
contentUspsSummaryUpdate Type ENDS				

5.22 Complex Type: commonContactType

Mail.XML 14.0A - Complex Type: commonContactType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
commonContactType BEGINS				
ContactType	Mailxml_base:contactType	-	Required Attribute	Refer to this simple type in Appendix B
ContactName	String 60	Only string	Required	-
Telephone	Mailxml_base:phoneNumberType	This is a simple type	Optional	Refer to this simple type in Appendix B
MobilePhone	Mailxml_base:phoneNumberType	This is a simple type	Optional	Refer to this simple type in Appendix B
Email	Mailxml_base:emailType	This is a simple type	Optional	Refer to this simple type in Appendix B

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: commonContactType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
Fax	Mailxml_base:phoneNumberType	This is a simple type	Optional	Refer to this simple type in Appendix B
GPSCoordinate	GPSCoordinate complex type	-	Optional	Refer to this complex type in Appendix A below
ContactID	ContactIDType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A below
commonContactType ENDS				

5.23 Complex Type: consigneeFacilityType

ConsigneeFacilityType is a block that provides Facility information where mailers should drop their mail.

Mail.XML 14.0A - Complex Type: consigneeFacilityType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
consigneeFacilityType BEGINS				
CompanyName	String, 40 characters		Required	
Choice Block BEGINS				
Sequence Block BEGINS				
FacilityNumber	String, 15 characters		Required	
FacilityAddress	addressType complex type		Optional, refer to AddressType	Refer to this complex type in Appendix A
Sequence Block ENDS				
FacilityAddress	addressType complex type		Optional	Refer to this complex type in Appendix A
Choice Block ENDS				
FacilityName	String, 40 characters		Optional	
FacilityType	String, 15 characters		Optional	
URL	Xs:anyURL		Optional	
CommonContact	commonContactType complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A
consigneeFacilityType ENDS				

5.24 Complex Type: ContactIDType

Mail.XML 14.0A - Complex Type: ContactIDType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ContactIDType BEGINS				
IDValue	String 30	-	Required when ContactIDType block is provided	-
IDValueType	Mailxml_base:IDType simple type	-	Required when ContactIDType block is provided	Refer to this simple type in Appendix B
ContactIDType ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.25 Attribute Type: contentAssignmentRequestMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: contentAssignmentRequestMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
contentAssignmentRequestMsgHeaderInfo BEGINS			Attributes block	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
SchedulerCRID	Mailxml_base:CRIDType		Optional	Refer to "CRIDType" simple type in Appendix B
MailerID6	mailerID6Type simple type		Optional	Refer to this simple type in Appendix B
MailerID9	mailerID9Type simple type		Optional	Refer to this simple type in Appendix B
contentAssignmentRequestMsgHeaderInfo ENDS				

5.26 Complex Type: csaInfoType

Mail.XML 14.0A - Complex Type: csaInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
csaInfoType BEGINS				
CSAEffectiveDate (as attribute)	Date	-	Optional	-
CSAStatus	csaStatusType simple type	-	Optional	Refer to this simple type in Appendix B
Sequence Block BEGINS				
CSADispatch	csaDispatchType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
ReturnInfo	basicReturnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
csaInfoType ENDS				

5.27 Complex Type: csaDispatchType

Mail.XML 14.0A - Complex Type: csaDispatchType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
csaDispatchType BEGINS				
CSATemplate (as attribute)	csaTemplateType simple type	-	Optional	Refer to this simple type in Appendix B
DispatchTime	Time	-	Optional	-
ArrivalTime	String 5	-	Optional	-
DaysOfWeek	daysOfWeekType simple type	-	Optional	Refer to this simple type in Appendix B
Trip Number	Numeric String 5	-	Optional	-
RecurringApptSeqID	String 6	-	Optional	-
USPSPublicationID	String 8	-	Optional	-
TripVolume	Numeric 3	-	Optional	-
ContainerDestinationZipCode	String 11	-	Optional 0 to many allowed	-

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: csaDispatchType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
FacilityLocaleKey	String 6	-	Required	-
MailClass	mailClassType simple type	-	Required	Refer to this simple type in Appendix B
PackageServiceSubClass	PackageServicesType simple type	-	Optional	Refer to this simple type in Appendix B
ProcessingCategory	ProcessingCategory simple type	-	Required	Refer to this simple type in Appendix B
ProcessingCode	processingCode simple type	-	Optional	Refer to this simple type in Appendix B
ProcessingCodeLabel	String 20	-	Optional	-
MinimumLoadForContainer	Numeric 2	-	Optional	-
ContainerReadyTIme	Time	-	Optional	-
SeparationNumber	Numeric 3	-	Optional	-
LabelTo	String 25	-	Optional	-
LabelToZip	String 5	-	Optional	-
CriticalAcceptanceTime	String 5	-	Optional	-
csaDispatchType ENDS				

5.28 Attribute Type: CustomerSupplierAgreementQueryMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: CustomerSupplierAgreementQueryMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
CustomerSupplierAgreementQueryMsgHeaderInfo BEGINS			Attributes block	
OwnerCRID	String 10	-	Optional	-
CSAID	String 10	-	Optional	-
CustomerSupplierAgreementQueryMsgHeaderInfo ENDS				

5.29 Complex Type: deliveryApptAcceptType

DeliveryApptAcceptType is a successful response block that returns the accepted appointment information to the sender of the message.

Mail.XML 14.0A - Complex Type: deliveryApptAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
deliveryApptAcceptType BEGINS				
ResponseMsgHeaderInfo	ResponseMsgHeaderInfo attribute block	-	Required	Refer to this attribute in Appendix A
Sequence Block BEGINS				
DestinationEntry	yesNo simple type	Only Yes or No	Required	To allow mailers to specify whether the mailing is origin entered or drop ship.
Choice Block BEGINS				
RecurringAppt	recurringApptType complex type	-	Required	Refer to this complex type in Appendix A
OneTimeAppt	oneTimeApptType complex type	-	Required	Refer to this complex type in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: deliveryApptAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
Choice Block ENDS				
DetailInfo	DetailInfoType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	trailerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeFacility	consigneeFacilityTyp e complex type	-	Required	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
deliveryApptAcceptType ENDS				

5.30 Complex Type: deliveryApptUpdateAcceptType

Mail.XML 14.0A - Complex Type: deliveryApptUpdateAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
deliveryApptUpdateAccept Type BEGINS				
ResponseMsgHeaderInfo	ResponseMsgHeaderInfo attribute block	-	Required	Refer to this attribute in Appendix A
Sequence Block BEGINS				
DestinationEntry	yesNo simple type	Either Yes or No	Required	This field allows mailers to specify whether the mailing is origin entered or drop ship.
Choice Block BEGINS				
RecurringAppt	recurringApptType complex type	-	Required	Refer to this complex type in Appendix A
OneTimeAppt	oneTimeApptType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
DetailInfo	DetailInfoType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
TrailerInfo	trailerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeFacility	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
deliveryApptUpdateAccept Type ENDS				

5.31 Complex Type: deliveryApptShellAcceptType

DeliveryApptShellAcceptType is a successful response block with the appointment shell information that returns to the sender of the message.

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: deliveryApptShellAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
deliveryApptShellAcceptType BEGINS				
RequestMsgHeaderInfo Attribute block	-	-	Attribute block	Refer to this attribute in Appendix A
ConsigneeFacility	ConsigneeFacilityType complex type		Required, refer to ConsigneeFacilityType	Refer to this complex type in Appendix A
Choice Block BEGINS			Either RecurringAppt block or OneTimeAppt block data be provided	-
RecurringAppt	RecurringApptType complex type		Required, refer to RecurringApptType	Refer to this complex type in Appendix A
OneTimeAppt	oneTimeApptType complex type		Required, refer to OneTimeApptType	Refer to this complex type in Appendix A
Choice Block ENDS				
TrailerInfo	TrailerInfoType complex type		Optional	Refer to this complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	Refer to this simple type in Appendix B
MailClass	Mailxml_base:mailClassType		Required 1 to many allowed	Refer to this simple type in Appendix B
ReturnInfo	ReturnInfoType complex type		Optional	Refer to this complex type in Appendix A
deliveryApptShellAcceptType ENDS				

5.32 Complex Type: deliveryApptShellRejectType

DeliveryApptShellRejectType is a reject response block with the appointment information and reject reason(s) that returns to the sender of the message.

Mail.XML 14.0A - Complex Type: deliveryApptShellRejectType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptShellRejectType BEGINS				
RequestMsgHeaderInfo Attribute block	-	-	Attribute block	Refer to this attribute in Appendix A
Sequence Block BEGINS				
DestinationEntry	Mailxml_base:yesNo	Only yes or No	-	Refer to this simple type in Appendix B
ReturnInfo	ReturnInfoType complex type		Required	Refer to this complex type in Appendix A
Sequence Block ENDS				
DeliveryApptShellRejectType ENDS				

5.33 Complex Type: deliveryApptUpdateRejectType

Mail.XML 14.0A - Complex Type: deliveryApptUpdateRejectType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryApptUpdateRejectType BEGINS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: deliveryApptUpdateRejectType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ResponseMsgHeaderInfo Attribute block	ResponseMsgHeaderInfo Attribute block	-	Attribute block	Refer to this attribute in Appendix A
ReturnInfo	ReturnInfoType complex type		Required	Refer to this complex type in Appendix A
DeliveryApptUpdateRejectType ENDS				

5.34 Complex Type: deliveryContentUpdatedType

Mail.XML 14.0A - Complex Type: deliveryContentUpdatedType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
deliveryContentUpdatedType BEGINS				
DeliveryContentUpdateHeaderInfo	DeliveryContentUpdateHeaderInfo attribute	-	Required	Refer to this attribute block in Appendix A
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only yes or now allowed	Required	Refer to this simple type in Appendix B
Choice Block BEGINS		Required block		
ContentDetailInfoUpdate	contentDetailInfoUpdateType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
Sequence Block BEGINS		Required 1 to many allowed		
ContentCancelled	Mailxml_base:yesNo	Only yes or now allowed	Required	Refer to this simple type in Appendix B
ContentCancelInfo	contentCancelType complex type	Required	-	Refer to this complex type in Appendix A
Sequence block ENDS				
Choice Block ENDS				
ReturnInfo	returnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
deliveryContentUpdatedType ENDS				

5.35 Complex Type: DeliveryContentAcceptType

DeliveryContentAcceptType is a successful content response block that provides information about the content for the sender of the content request message.

Mail.XML 14.0A – Complex Type: DeliveryContentAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentAcceptType BEGINS				
DeliveryContentHeaderInfo attribute block	DeliveryContentHeaderInfo attribute block		Attributes block	Refer to this attribute block in Appendix A

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A – Complex Type: DeliveryContentAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ConsigneeFacility	mailxml: ConsigneeFacilityType		Optional	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This is a Boolean type simple type
ContentDetailInfo	mailxml: ContentDetailInfoType		Required 1 to many allowed	Refer to 'ContentDetailInfo' complex type in Appendix A
ReturnInfo	returnInfoType complex type		Optional	Refer to this complex type in Appendix A
DeliveryContentAcceptType ENDS				

5.36 Complex Type: DeliveryContentRejectType

DeliveryContentRejectType is a reject response block that contains several blocks with specific content information and the reject reason(s) for scheduling the content in FAST.

Mail.XML 14.0A - Complex Type: DeliveryContentRejectType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentRejectType BEGINS				
DeliveryContentHeaderInfo attribute block	DeliveryContentHeaderInfo attribute block		Attributes block	Refer to this attribute block in Appendix A
Sequence Block BEGINS				
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This is a Boolean type simple type
ReturnInfo	returnInfoType complex type		Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
DeliveryContentRejectType ENDS				

5.37 Complex Type: DeliveryContentUpdateAcceptType

Mail.XML 14.0A - Complex Type: DeliveryContentUpdateAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentUpdateAcceptType BEGINS				
DeliveryContentUpdateHeaderInfo attribute block	DeliveryContentUpdateHeader Info attribute block		Attributes block	Refer to this attribute block in Appendix A
ConsigneeFacility	mailxml: ConsigneeFacilityType		Optional	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This is a Boolean type simple type
ContentDetailInfoUpdate	mailxml: ContentDetailInfoUpdateType		Required 1 to many allowed	Refer to this complex type in Appendix A
ReturnInfo	returnInfoType complex type		Optional	Refer to this complex type in Appendix A
DeliveryContentUpdateAccep				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: DeliveryContentUpdateAcceptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
tType ENDS				

5.38 Complex Type: DeliveryContentUpdateRejectType

Mail.XML 14.0A - Complex Type: DeliveryContentUpdateRejectType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentUpdateRejectType BEGINS				
DeliveryContentUpdateHeaderInfo attribute block	DeliveryContentUpdate HeaderInfo attribute block		Attributes block	Refer to this attribute block in Appendix A
Sequence Block BEGINS				
DestinationEntry	Mailxml_base:yesNo	Only Yes or No	Required	This is a Boolean type simple type
ReturnInfo	returnInfoType complex type		Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
DeliveryContentUpdateRejectType ENDS				

5.39 Attribute Type: DeliveryContentHeaderInfo

Mail.XML 14.0A - Attribute Type: DeliveryContentHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentHeaderInfo BEGINS			Attributes block	
ConsigneeApptID	String, 12 characters		Optional	
SchedulerID	String, 12 characters		Optional	
SchedulerCorpID	String, 12 characters		Optional	
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
DeliveryContentHeaderInfo ENDS				

5.40 Attribute Type: DeliveryContentUpdateHeaderInfo

Mail.XML 14.0A - Attribute Type: DeliveryContentUpdateHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentUpdateHeaderInfo BEGINS			Attributes block	
ConsigneeApptID	String, 12 characters		Optional	
SchedulerID	String, 12 characters		Optional	
SchedulerCorpID	String, 12 characters		Optional	
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Attribute Type: DeliveryContentUpdateHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
FullContentReplacement	Mailxml_base:yesNo	Only yes or no is allowed	This is a flag by which user can indicate whether the message will replace the full content	-
DeliveryContentUpdateHeaderInfo ENDS				

5.41 Attribute Type: DeliveryContentQueryMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: DeliveryContentQueryMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentQueryMsgHeaderInfo BEGINS			Attributes block	
ConsigneeApptID	String, 12 characters		Optional	
SchedulerID	String, 12 characters		Optional	
SchedulerCorpID	String, 12 characters		Optional	
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
SchedulerContentID	String 12	-	Optional	-
ConsigneeContentID	String 12	-	Optional	-
RetrieveContentUpdatedStartDate	Date	-	Optional	-
RetrieveContentUpdatedEndDate	Date	-	Optional	-
DeliveryContentQueryMsgHeaderInfo ENDS				

5.42 Attribute Type: DeliveryContentHeaderInfoCancel

Mail.XML 14.0A - Attribute Type: DeliveryContentHeaderInfoCancel				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliveryContentHeaderInfo Cancel BEGINS			Attributes block	
SchedulerID	String, 12 characters		Optional	
SchedulerCorpID	String, 12 characters		Optional	
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
DeliveryContentHeaderInfo Cancel ENDS				

5.43 Complex Type: DeliverySummaryType

Mail.XML 14.0A - Complex Type: DeliverySummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DeliverySummaryType BEGINS				
ConsigneeFacility	mailxml: ConsigneeFacilityType		Optional	Refer to 'ConsigneeFacility' complex type in Appendix A
DestinationEntry	Mailxml_base:yesNo	Yes or No	Required	Allows mailers to specify the mail as origin entered or drop ship.
ContentDetailInfo	ContentDetailInfoType		Optional	Refer to 'ContentDetailInfo'

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: DeliverySummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
	complex type		0 to many allowed	complex type in Appendix A
DeliverySummaryType ENDS				

5.44 ComplexType: detailInfoType

DetailInfotype is a block that contains several blocks of information including a block for content information in FAST.

Mail.XML 14.0A - ComplexType: detailInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
DetailInfoType BEGINS			Optional	
ShipperContainerGroupingID	String, 16 characters		Optional	
ConsigneeContainerGroupingID	String, 16 characters		Optional	
StartTheClockDate	Date	-	Optional	-
ShipperGroupingIDDescription	String, 50 characters	-	Optional	-
Choice block BEGINS			Required 1 to many allowed	
MailDatSummary	mailDatSummaryType complex type	-	Required	Refer to this complex type in Appendix A
USPSSummary	uspsSummaryType complex type	-	Required	Refer to this complex type in Appendix A
ConsigneeContentID	String 12	-	Required The reason for ConsigneeContentID outside of the USPSSummary block will allow Schedulers to associate Stand-Alone content without updating any content level information. All messages besides DeliveryApptCreateRequest, DeliveryApptUpdateRequest, DeliveryApptQueryRequest, and DeliveryApptCancelCreate request will ignore this field	-
Choice Block ENDS				
DetailInfoType ENDS				

5.45 Complex Type: eFileSamplingTimeType

Mail.XML 14.0A - Complex Type: eFileSamplingTimeType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
eFileSamplingTimeType BEGINS				
EFileNumber	String 22	-	Required	-
EFileSamplingTime	dateTime	-	Required	-
eFileSamplingTimeType ENDS				

5.46 Complex Type: GPSCoordinates

GPSCoordinates is a block that provides additional information for the Facility information block.

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: GPSCoordinates				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
GPSCoordinates BEGINS				
GPS System	gpsSystemType simple type		Optional (attribute)	Refer to this simple type in Appendix B
Sequence Block BEGINS				
Latitude	dec18-8		Required	Refer to this simple type in Appendix B
Longitude	dec18-8		Required	Refer to this simple type in Appendix B
Height	MeasurementType complex type		Optional, refer to measurementType	Refer to in Appendix A below
Sequence Block ENDS				
GRPSCoordinate ENDS				

5.47 Attribute Type: LargeTransactionDividerGroupOptionalType

Mail.XML 14.0A - Attribute Type: LargeTransactionDividerGroupOptionalType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
LargeTransactionDividerGroup OptionalType BEGINS			Attributes block	
MessageGroupID	String 20	-	Optional	-
TotalMessageCount	positiveInteger	-	Optional	-
MessageSerialNumber	positiveInteger	-	Optional	-
TransmittedRecordCount	positiveInteger	-	Optional	-
TotalRecordsAcrossMessages	positiveInteger	-	Optional	-
LastMessage	Mailxml_base:yesNo	Only yes or no allowed	Indicates whether the record is last set as part of the response message.	-
LargeTransactionDividerGroup OptionalType ENDS				

5.48 ComplexType: MailDatSummaryType

MailDatSummary is a block that the mailers can send to *PostalOne!*, and *PostalOne!* will generate the USPSSummary block off of it

Mail.XML 14.0A - ComplexType: MailDatSummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
MailDatSummaryType BEGINS				
Attribute Block BEGINS			Required	
IncludedInSummarizationBlock	Mailxml_base:yesNo	Only Yes or No allowed	Optional (Attribute)	Refer to this simple type in Appendix B
SchedulerContentID	String, 12 characters		Optional (Attribute)	
Attribute Block ENDS				
UserLicenseCode	userLicenseCodeType simple type	-	Required	Refer to this simple type in Appendix B
MailDatJobID	jobIDType simple type	-	Required	Refer to this simple type in Appendix B
DatabaseContainerID	mailxml_base:database ContainerIDType	-	Required	Refer to this simple type in Appendix B
IMcb	mailxml_base:IMcbType	-	Optional	Refer to this simple type in Appendix B

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - ComplexType: MailDatSummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
VerificationZip4	Numeric String, 9 characters	Only numbers from 0 to 9 are allowed	Optional	-
IMpb	IMpbType simple type	-	Optional	Refer to this simple type in Appendix B
IMtb	IMtbType simple type	-	Optional	Refer to this simple type in Appendix B
MailDatSummaryType ENDS				

5.49 Attribute Type: MailXMLHeaderInfo

Mail.XML 14.0A - Attribute Type: MailXMLHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
MailXMLHeaderInfo BEGINS			Attributes block	
CustomerGroupID	String 25	-	Optional Applies to Mail.XML submissions	-
MailingGroupID	nonNegativeInteger	-	Optional Applies to Mail.XML submissions	-
MaildatJobID	jobIDType simple type	-	Optional Applies to Mail.dat files	Refer to this simple type in Appendix B
UserLicenseCode	userLicenseCodeType simple type	-	Optional Applies to Mail.dat files.	Refer to this simple type in Appendix B
MailXMLHeaderInfo ENDS				

5.50 ComplexType: OneTimeApptType

OneTimeAppt block provides information to create appointment date/time when scheduling the appointment in FAST system

Mail.XML 14.0A - ComplexType: OneTimeApptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
OneTimeApptType BEGINS			Required	
PreferredAppt	dateTime	YYYY-MM-DDTHH:MM:SS	Required	
OptionalAppt	optionalApptType complex type		Optional 0 to many allowed	Refer to this complex type in Appendix A below
OneTimeApptType ENDS				

5.51 ComplexType: OptionalApptType

OptionalAppt will be used to generate the appointment date/time if the OneTimeAppt block is invalid or not available.

Mail.XML 14.0A - ComplexType: OptionalApptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
OptionalAppt BEGINS			Optional	
Start	dateTime	YYYY-MM-DDTHH:MM:SS	Required	
End	dateTime	YYYY-MM-DDTHH:MM:SS	Required	
OptionalAppt ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.52 ComplexType: palletUnitType

PalletUnitType provides the Pallet count for each content (USPSSummary block)

Mail.XML 14.0A - ComplexType: palletUnitType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
palletUnitType BEGINS			Required	
Attribute Block BEGINS			Required	
Count	nonNegativeInteger		Required (Attribute)	
HandlingUnitType	palletHandlingUnitType simple type	-	Required (Attribute)	Refer to this simple type in Appendix B
PalletType	palletType simple type		Required (Attribute)	Refer to this simple type in Appendix B
Attribute BlockENDS				
Choice Block BEGINS			Either PalletpresortLevel block or USPSContainerInfo block data is required	
PalletPreSortLevel	palletPresortType complex type	-	Required 1 to many allowed	Refer to this complex type in Appendix A
USPSContainerInfo	uspsContainerInfoType complex type	-	Required	Refer to this complex type in Appendix A
Choice Block ENDS				
palletUnitType ENDS				

5.53 ComplexType: palletPresortType

PalletPresortType block provides information to identify the USPS container.

Mail.XML 14.0A - ComplexType: palletPresortType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
palletPresortType BEGINS			Required	
Attribute Block BEGINS			Required	
Count	nonNegativeInteger		Required, (Attribute)	
MailDatCode	containerLevelType simple type	-	Required (Attribute)	Refer to this simple type in Appendix B
Attribute Block ENDS				
USPSContainerInfo	uspsContainerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
palletPresortType ENDS				

5.54 Complex Type: partnerContentAssignmentType

Mail.XML 14.0A - Complex Type: partnerContentAssignmentType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
partnerContentAssignmentType BEGINS				
PartnerIdentifier	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
ConsigneeContentID	String 12	-	Required 1 to many allowed	-
DestinationEntry	String 12	-	Required	-
partnerContentAssignmentType ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.55 Complex Type: partnerApptBlockType

Mail.XML 14.0A - Complex Type: partnerApptBlockType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
partnerApptBlockType BEGINS				
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeApptID	String 12	-	Required	-
ScheduledAppt	datetime	-	Required	-
Comment	String 256	-	Optional	-
MailClass	mailClassType simple type	-	Required	Refer to this simple type in Appendix B
TrailerInfo	trailerInfoType complex type	-	Optional	Refer to this complex type in Appendix A
ContentDetailInfoUpdate	contentDetailInfoUpdateType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
partnerApptBlockType ENDS				

5.56 Attribute Type: PartnerApptRequestHeaderInfo

Mail.XML 14.0A - Attribute Type: PartnerApptRequestHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
PartnerApptRequestHeaderInfo BEGINS			Attributes block	
ConsigneeApptID	String, 12 characters		Optional	
SchedulerID	String, 12 characters		Optional	
SchedulerCorpID	String, 12 characters		Optional	
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
SchedulerContentID	String 12	-	Optional	-
ConsigneeContentID	String 12	-	Optional	-
Start	datetime	-	Optional	-
End	datetime	-	Optional	-
RetrieveContentUpdatedStartDate	Date	-	Optional	-
RetrieveContentUpdatedEndDate	Date	-	Optional	-
PartnerApptRequestHeaderInfo ENDS				

5.57 Attribute Type: PickupRequestHeaderInfo

Mail.XML 14.0A - Attribute Type: PickupRequestHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
PickupRequestHeaderInfo BEGINS			Attributes block	
ShipperApptRequestID	Mailxml_base:s12		Required	
ConsigneeApptID	Mailxml_base:s12		Optional	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
ApptType	Mailxml_base:app		Required	Refer to “apptTypeType”

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Attribute Type: PickupRequestHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
	tTypeType			simple type in Appendix B
IncludesElectronicLoad	yesNo		Optional	
PickupRequestHeaderInfo ENDS				

5.58 Attribute Type: PickupResponseHeaderInfo

Mail.XML 14.0A - Attribute Type: PickupResponseHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
PickupResponseHeaderInfo BEGINS			Attributes block	
ShipperApptRequestID	Mailxml_base:s12		Required	
ConsigneeApptID	Mailxml_base:s12		Optional	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
ApptType	Mailxml_base:apptType Type		Required	Refer to “apptTypeType” simple type in Appendix B
PickupResponseHeaderInfo ENDS				

5.59 Complex Type: pickupApptBlockRequestType

Mail.XML 14.0A - Complex Type: pickupApptBlockRequestType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
pickupApptBlockRequestType BEGINS				
SubmittingParty	participantIDType complex type	-	Required	Refer to this complex type in Appendix A
SubmittingSoftware	submittingSoftwareType complex type	-	Required	Refer to this complex type in Appendix A
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
PickupLocation	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
PreferredAppt	dateTime	-	Required	-
OptionalAppt	optionalApptType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
Comment	String 256	-	Optional	-
TransportationResponsibility	responsibleTransportatio nPartyType simple type	-	Required	Refer to this simple type in Appendix B
pickupApptBlockRequestType ENDS				

5.60 Complex Type: pickupApptBlockResponseType

Mail.XML 14.0A - Complex Type: pickupApptBlockResponseType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
pickupApptBlockResponseType BEGINS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: pickupApptBlockResponseType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
TrackingID	String 20	-	Optional	-
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
PickupLocation	consigneeFacilityType complex type	-	Required	Refer to this complex type in Appendix A
ScheduledAppt	dateTime	-	Required	-
Comment	String 256	-	Optional	-
TransportationResponsibility	responsibleTransportationPartyType simple type	-	Required	Refer to this simple type in Appendix B
pickupApptBlockResponseType ENDS				

5.61 Complex Type: queryErrorType

QueryErrorType is the block that returns the reject reason(s) for the query request message.

Mail.XML 14.0A - Complex Type: queryErrorType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
queryErrorType BEGINS				
ReturnInfo	returnInfoType complex type	-	Required	Refer to this complex type in Appendix A
queryErrorType ENDS				

5.62 Complex Type: recurringApptType

This block provides information to create the effective date range and scheduling frequency for the recurring appointment level in FAST.

Mail.XML 14.0A - Complex Type: recurringApptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
recurringApptType BEGINS				
EffectiveStartDate	date	YYYY-MM-DD	Required (attribute)	
EffectiveEndDate	date	YYYY-MM-DD	Required (attribute)	
ApptTime	time	HH:MM:SS	Required (attribute)	
DayFrequency	mailxml_base:dayFrequencyType		Required (attribute) 1 to many allowed	
WeekFrequency	mailxml_base:weekFrequencyType		Required (attribute)	
recurringApptType ENDS				

5.63 Complex Type: recurringApptBlockType

Mail.XML 14.0A - Complex Type: recurringApptBlockType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
recurringApptBlockType BEGINS				
RecurringApptQueryResponseHeaderInfo attribute block	RecurringApptQueryResponseHeaderInfo attribute block	-	Attribute block	Refer to this attribute in Appendix A
ConsigneeFacility	consigneeFacilityType complex type	-	Required	Refer to this complex type in

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: recurringApptBlockType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
				Appendix A
RecurringData	recurringApptType complex type	-	Required	Refer to this complex type in Appendix A
RecurringApptStatus	recurringStatusType simple type	-	Required	Refer to this simple type in Appendix B
USPSSummary	uspsSummaryType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
PostalClass	mailClassType simple type	-	Required 1 to many allowed	Refer to this simple type in Appendix B
ReturnInfo	basicReturnInfoType complex type	-	Optional	Refer to this complex type in Appendix A
recurringApptBlockType ENDS				

5.64 Complex Type: recurringApptType

This block provides information to create the effective date range and scheduling frequency for the recurring appointment level in FAST.

Mail.XML 14.0A - Complex Type: recurringApptType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
recurringApptType BEGINS				
EffectiveStartDate	date	YYYY-MM-DD	Required	-
EffectiveEndDate	date	YYYY-MM-DD	Required	
ApptTime	time	HH:MM:SS	Required	
DayFrequency	dayFrequencyType simple type		Required 1 to many allowed	Refer to this simple type in Appendix B
WeekFrequency	weekFrequencyType simple type		Required 1 to many allowed	Refer to this simple type in Appendix B
recurringApptType ENDS				

5.65 Attribute Type: RecurringApptQueryRequestHeaderInfo

Mail.XML 14.0A - Attribute Type: RecurringApptQueryRequestHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
RecurringApptQueryRequestHeaderInfo BEGINS			Attributes block	
CreatorSchedulerID	Mailxml_base:s12		Required	
CreatorSchedulerCorpID	Mailxml_base:s12		Optional	
CreatorSchedulerCRID	CRIDType simple type		Optional	Refer to this simple type in Appendix B
RecurringApptStatus	recurringStatusType simple type		Required	Refer to this simple type in Appendix B
RecurringApptID	String 8	-	Optional	-

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Attribute Type: RecurringApptQueryRequestHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
RetrieveContentUpdatedStartDate	Date	-	Optional	-
RetrieveContentUpdatedEndDate	Date	-	Optional	-
RecurringApptQueryRequestHeaderInfo ENDS				

5.66 Attribute Type: RecurringApptQueryResponseHeaderInfo

Mail.XML 14.0A - Attribute Type: RecurringApptQueryResponseHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
RecurringApptQueryResponseHeaderInfo BEGINS			Attributes block	
CreatorSchedulerID	Mailxml_base:s12		Required	
CreatorSchedulerCorpID	Mailxml_base:s12		Optional	
CreatorSchedulerCRID	CRIDType simple type		Optional	Refer to this simple type in Appendix B
RecurringApptStatus	recurringStatusType simple type		Required	Refer to this simple type in Appendix B
RecurringApptID	String 8	-	Optional	-
ApptType	apptTypeType simple type	-	Optional	Refer to this simple type in Appendix A
RetrieveContentUpdatedStartDate	Date	-	Optional	-
RetrieveContentUpdatedEndDate	Date	-	Optional	-
RecurringApptQueryResponseHeaderInfo ENDS				

5.67 Attribute Type: RequestMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: RequestMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
RequestMsgHeaderInfo BEGINS			Attributes block	
ShipperApptRequestID	Mailxml_base:s12		Required	
ConsigneeApptID	Mailxml_base:s12		Optional	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
SchedulerCRID	Mailxml_base:CRID Type		Optional	Refer to “CRIDType” simple type in Appendix B
ShipperMultiStopID	Mailxml_base:s12		Optional	
ConsigneeMultiStopID	Mailxml_base:s12		Optional	
ShipperStopNumber	Mailxml_base:n06		Optional	
ApptType	Mailxml_base:apptTypeType		Required	Refer to “apptTypeType” simple type in Appendix B
PickupOrDelivery	Mailxml_base:pickupOrDeliveryType		Optional	Refer to “PickupOrDeliveryType” simple type in Appendix B
PalletPositionCount	Mailxml_base:n02		Optional	
IncludesElectronicLoad	yesNo		Optional	
RequestMsgHeaderInfo				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Attribute Type: RequestMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ENDS				

5.68 Attribute Type: ResponseMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: ResponseMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ResponseMsgHeaderInfo BEGINS			Attributes block	
ShipperApptRequestID	Mailxml_base:s12		Required	
ConsigneeApptID	Mailxml_base:s12		Required	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
SchedulerCRID	Mailxml_base:CRID Type		Optional	Refer to “CRIDType” simple type in Appendix B
ShipperMultiStopID	Mailxml_base:s12		Optional	
ConsigneeMultiStopID	Mailxml_base:s12		Optional	
ShipperStopNumber	Mailxml_base:n06		Optional	
ApptType	Mailxml_base:apptT ypeType		Required	Refer to “apptTypeType” simple type in Appendix B
PickupOrDelivery	Mailxml_base:pickup OrDeliveryType		Optional	Refer to “PickupOrDeliveryType” simple type in Appendix B
PalletPositionCount	Mailxml_base:n02		Optional	
IncludesElectronicLoad	mailxml_base:yesNo		Optional	
ResponseMsgHeaderInfo ENDS				

5.69 Attribute Type: ResponseApptUpdateMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: ResponseApptUpdateMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ResponseApptUpdateMsg HeaderInfo BEGINS			Attributes block	
ShipperApptRequestID	Mailxml_base:s12		Required	
ConsigneeApptID	Mailxml_base:s12		Required	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
SchedulerCRID	Mailxml_base:CRI DType		Optional	Refer to “CRIDType” simple type in Appendix B
ApptType	Mailxml_base:app tTypeType		Required	Refer to “apptTypeType” simple type in Appendix B
PickupOrDelivery	Mailxml_base:pick upOrDeliveryType		Optional	Refer to “PickupOrDeliveryType” simple type in Appendix B
PalletPositionCount	Mailxml_base:n02		Optional	
IncludesElectronicLoad	yesNo		Optional	
ResponseApptUpdateMsg HeaderInfo ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.70 Complex Type: ReturnInfoType

Mail.XML 14.0A - Complex Type: ReturnInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ReturnInfoType BEGINS				
ConsigneeFacilityType	ConsigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
Error Warning Type	ErrorWarningType complex type		Optional	Refer to this complex type in Appendix A
Sequence Block BEGINS			Optional 0 to many blocks are allowed	
ContainerErrorWarningBlock	containerErrorWarningBlockType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block ENDS				
ReturnInfoType ENDS				

5.71 Complex Type: optReturnInfoType

Mail.XML 14.0A - Complex Type: optReturnInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ReturnInfoType BEGINS				
ConsigneeFacilityType	ConsigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
Sequence Block BEGINS			Optional 0 to many blocks are allowed	
ReturnCode	Numeric String 4	Only numeric string allowed	Optional	-
ReturnDescription	String 260	-	Required	-
Sequence Block ENDS				
ReturnInfoType ENDS				

5.72 Complex Type: slotAvailabilityType

SlotAvailabilityType block is a block that provides specific information about available date/time for scheduling appointments at the facility requested.

Mail.XML 14.0A - Complex Type: slotAvailabilityType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
slotAvailabilityType BEGINS				
ApptType	apptTypeType simple type	-	Required	Refer to this simple type in Appendix B
MailClass	mailClassType simple type	-	Required 1 to many allowed	Refer to this simple type in Appendix B
Perishable	Mailxml_base:yesNo	-	Optional	Refer to this simple type in Appendix B
ApptStartTime	dateTime	YYYY-MM-DDTHH:MM:SS	Required	
ApptEndTime	dateTime	YYYY-MM-DDTHH:MM:SS	Required	
ApplyTiers	Mailxml_base:yesNo	-	Required	Refer to this simple type in Appendix B
slotAvailabilityType ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

5.73 Complex Type: StaleContentNotificationElementType

Mail.XML 14.0A - Complex Type: StaleContentNotificationElementType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
StaleContentNotificationElementType BEGINS			Attributes block	
ConsigneeFacility	consigneeFacilityType complex type	-	Optional	Refer to this complex type in Appendix A
ConsigneeContentID	String 12	-	Required	-
NumberOfDaysStale	Numeric String 2	-	Required	-
DestinationEntry	yesNo simple type	Either Yes or No	Required	Allow mailers to specify whether mail is origin entered or drop ship
StaleContentNotificationElementType ENDS				

5.74 Attribute Type: StatusRequestMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: StatusRequestMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
StatusRequestMsgHeaderInfo BEGINS			Attributes block	
CloseoutResponseID	String 12	-	Optional	-
CreatorSchedulerID	Mailxml_base:s12		Required	
CreatorSchedulerCorpID	Mailxml_base:s12		Optional	
CreatorSchedulerCRID	CRIDType simple type		Optional	Refer to this simple type in Appendix B
StatusRequestMsgHeaderInfo ENDS				

5.75 Attribute Type: StatusRequestByTimeMsgHeaderInfo

Mail.XML 14.0A - Attribute Type: StatusRequestByTimeMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
StatusRequestByTimeMsgHeaderInfo BEGINS			Attributes block	
SchedulerID	String 12	-	Optional	-
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
SchedulerCorpID	String 12	-	Optional	-
CreatorSchedulerID	Mailxml_base:s12		Optional	
CreatorSchedulerCorpID	Mailxml_base:s12		Optional	-
CreatorSchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
Start	datetime	-	Optional	-
End	datetime	-	Optional	-
StatusRequestByTImeMsgHeaderInfo ENDS				

5.76 Complex Type: participantIDType

This block is used to indentify each individual submitting to the *PostalOne! system*

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: SubmittingParty/ participantIDType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
ParticipantIDType Block BEGINS			Required block; Identifies the software submitting the message	
MailerID6	Mailxml_base: mailerID6Type		Optional Either MailerID6 or MailerID9 can be provided, not both	Refer to “mailerID6Type” simple type in Appendix B
MailerID9	Mailxml_base: mailerID9Type		Optional Either MailerID6 or MailerID9 can be provided, not both	Refer to “mailerID9Type” simple type in Appendix B
CRID	Mailxml_base: CRIDType		Optional Either CRID or MID can be provided for authorization	Refer to “CRIDType” simple type in Appendix B
SchedulerID	Mailxml_base: s12		Optional	
MaildatUserLicense	Mailxml_base: userLicenseCodeType		Optional	Refer to “userLicenseCodeType” simple type in Appendix B
ShippingAgentID	String 12	-	Optional	-
ReceivingAgentID	String 12	-	Optional	-
ParticipantIDType Block ENDS				

5.77 Complex Type: SubmittingSoftwareType

Mail.XML 14.0A - Complex Type: SubmittingSoftwareType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
SubmittingSoftware Block BEGINS				
SoftwareName	xs:string		Required (attribute)	
Vendor	xs:string		Required (attribute)	
Version	xs:string		Required (attribute)	
ApprovalDate	xs:date	YYYY-MM-DD	Optional (attribute)	-
ApprovalKey	xs:string		Optional (attribute)	
SubmittingSoftware Block ENDS				

5.78 Complex Type: trayHandlingUnitType

BedloadHandlingUnitType provides the specific presort level count of bedload trays for each content when scheduling the appointment in FAST.

Mail.XML 14.0A - Complex Type: trayHandlingUnitType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
trayHandlingUnitType BEGINS				
Count (as attribute)	nonNegativeInteger		Required (attribute)	
Type (as attribute)	trayType simple type		Optional (attribute)	Refer to this simple type in Appendix B
PreSortLevel Block BEGINS				
MaildatCode (as attribute)	ContainerLevelType simple type	-	Required	Refer to this simple type in Appendix B
Count (as attribute)	nonNegativeInteger	-	Required	-
PreSortLevel Block ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: trayHandlingUnitType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
IMpb	ImpbType simple type	-	Optional	Refer to this simple type in Appendix B
Imtb	ImtbType simple type	-	Optional	Refer to this simple type in Appendix B
trayHandlingUnitType ENDS				

5.79 Complex Type: trailerInfoType

TrailerInfoType is a block that contains several blocks of information pertaining to transportation and delivery of mail.

Mail.XML 14.0A - Complex Type: trailerInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
TrailerInfoType BEGINS				
Trailer	trailerType complex type		Optional 0 to 2 allowed	Refer to this complex type in Appendix A below
Carrier	CarrierType complex type		Optional	Refer to this complex type in Appendix A below
BillOfLadingNumber	String, 15 characters		Required 1 – 2 allowed	-
TrailerInfoType ENDS				

5.80 Complex Type: trailerType

TrailerType is a block that contains the delivery truck's information for each content.

Mail.XML 14.0A - Complex Type: trailerType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
trailerType BEGINS				
TrailerNumber	String 12		Optional	
TrailerLength	Mailxml_base:trailerLengthType		Optional	Refer to this simple type in Appendix B
trailerType ENDS				

5.81 Attribute Type: UnscheduledResponseMsgHeaderInfo

Mail.XML 14.0A UnscheduledResponseMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
UnscheduledResponseMsg HeaderInfo BEGINS			Attributes block	
ConsigneeApptID	Mailxml_base:s12		Required	
SchedulerID	Mailxml_base:s12		Optional	
SchedulerCorpID	Mailxml_base:s12		Optional	
SchedulerCRID	CRIDType simple type		Optional	Refer to this simple type in Appendix B
ApptType	apptTypeType simple type		Required	Refer to this simple type in Appendix B
UnscheduledResponseMsg				

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A UnscheduledResponseMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
HeaderInfo ENDS				

5.82 Complex Type: USPSDeliveryContentUpdatedNotificationMsgHeaderInfo

Mail.XML 14.0A - Complex Type: USPSDeliveryContentUpdatedNotificationMsgHeaderInfo				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
USPSDeliveryContentUpdatedNotificationMsgHeaderInfo BEGINS			Attributes block	
ConsigneeApptID	String, 12 characters		Optional	
SchedulerID	String, 12 characters		Optional	
SchedulerCorpID	String, 12 characters		Optional	
SchedulerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
SchedulerContentID	String 12	-	Optional	-
ConsigneeContentID	String 12	-	Optional	-
DestionationEntry	yesNo	-	Optional	-
USPSDeliveryContentUpdatedNotificationMsgHeaderInfo ENDS				

5.83 Complex Type: USPSSummaryType

Mail.XML 14.0A - Complex Type: USPSSummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
UspsSummaryType BEGINS				
Attribute block BEGINS				
SchedulerContentID	String, 12 characters		Required (attribute)	
ConsigneeContentID	String. 12 characters		Optional (attribute)	
Attribute block ENDS				
DestinationDiscountIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
ZoneSkippingIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
FullServiceIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Optional	Refer to this simple type in Appendix B
Pallets	palletUnitType complex type	-	Optional 0 to many allowed	Refer to this complex type in Appendix A
Bedload	bedloadUnitType complex type	-	Optional	Refer to this complex type in Appendix A
Perishable	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
MailClass	mailClassType simple type	See simple type values	Required	Refer to this simple type in Appendix B
RateType	RateType simple type	See simple type values	Optional	Refer to this simple type in Appendix B
InHomeStart	dateTime	YYYY-MM-DDTHH:MM:SS	Optional	
InHomeEnd	dateTime	YYYY-MM-DDTHH:MM:SS	Optional	
ProcessingCategory	processingCategoryT	-	Required	Refer to this simple

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: USPSSummaryType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
	ype simple type			type in Appendix B
PriorityMailIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
VerificationLocation	verificationLocationType simple type	-	Required	Refer to this simple type in Appendix B
NewsIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Required	Refer to this simple type in Appendix B
EvsIndicator	Mailxml_base:yesNo	Only Yes or No allowed	Optional	Refer to this simple type in Appendix B
MailContentName	String, 30 characters		Optional	
MailPreparerID	String, 12 characters		Optional	
MailPreparerCRID	CRIDType simple type	-	Optional	Refer to this simple type in Appendix B
AdvanceMailingID	String, 9 characters		Optional 0 to many allowed	
EFileNumber	String, 22 characters		Optional	
ContainsAutoMail	Mailxml_base:yesNo	Only Yes or No allowed	Optional	Refer to this simple type in Appendix B
UspsSummaryType ENDS				

5.84 Complex Type: USPSContainerInfoType

USPSContainerInfoType block provides container information for each container within content.

Mail.XML 14.0A - Complex Type: USPSContainerInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
uspsContainerInfoType BEGINS				
MailOwnerID	String 12		Optional 0 to many allowed	
MailOwnerCRID	CRIDType simple type	-	Optional 0 to many allowed	Refer to this simple type in Appendix B
USPSPublicationID	String 8		Optional 0 to many allowed	
ActualPieceCount	nonNegativeInteger		Optional	
ContainerWeight	float		Optional	
Sequence Block BEGINS			Optional sequence block 0 to many allowed	
IMcb	IMcbType simple type		Required	Refer to this simple type in Appendix B
IMcbInfo	IMcbInfoType simple type		Optional	Refer to this simple type in Appendix B
SiblingBarcode	IMcbType simple type		Optional 0 to many allowed	Refer to this simple type in Appendix B
PostInductionStatus	PostInductionStatus Complex Type		Optional	Refer to this complex type in Appendix A
Sequence block ENDS				
Choice block BEGINS			Optional Choice block	

Copyright © 2016 USPS®. All Rights Reserved.

Mail.XML 14.0A - Complex Type: USPSContainerInfoType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
			0 to many allowed	
ContainerDestination3digitZIP	Numeric string 3	Only numbers from 0 to 9 are allowed	Required	
ContainerDestination5digitZIP	Numeric string 5	Only numbers from 0 to 9 are allowed	Required	
Choice block ENDS				
uspsContainerInfoType ENDS				

5.85 Complex Type: uspsDetailType

Mail.XML 14.0A - Complex Type: uspsDetailType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
uspsDetailType BEGINS				
USPSMultiApptID	String 12	-	Optional 0 to many allowed	-
USPSClosedBySV	uspsClosedBySVType complex type	-	Optional	Refer to this complex type in Appendix A
uspsDetailType ENDS				

5.86 Complex Type: uspsClosedBySVType

Mail.XML 14.0A - Complex Type: uspsClosedBySVType				
Field	**Format**	**Acceptable Values**	**Business Rules**	**Comment**
uspsClosedBySVType BEGINS				
AutoScan	NonNegativeInteger	-	Optional	-
ManualScan	NonNegativeInteger	-	Optional	-
uspsClosedBySVType ENDS				

Copyright © 2016 USPS®. All Rights Reserved.

6. Appendix B - Mail.XML 14.0A Simple Types

Simple Type Data Structures
The simple types below list variation of validation in Mail.XML 14.0A.

6.1 simpleType: actionCodeType

Tag	actionCodeType
Base	xs:string
enumeration	F = Forwarded
enumeration	W = Wasted
enumeration	R = Returned
enumeration	U = Unable to determine action

6.2 simpleType: addressCorrectionMoveType

Tag	addressCorrectionMoveType
Base	xs:string
enumeration	F = Family Move
enumeration	I = Individual Move
enumeration	B = Business Move

6.3 simpleType: additionalInHomeRangeType

Tag	additionalInHomeRangeType
Base	mailxml_base:n01

6.4 simpleType: adjustmentStatusType

Tag	adjustmentStatusType
Base	xs:string
enumeration	R = Ready to Pay
enumeration	X = Paid
enumeration	C = Cancel
enumeration	P = Preliminary Postage Statement
enumeration	T = Transportation

6.5 simpleType: adjustmentType

Tag	adjustmentType
Base	xs:string
enumeration	1 = Re-order in excess of tolerance
enumeration	2 = “Average Remail” Add-on
enumeration	3 = Spoilage
enumeration	4 = Shortage

6.6 simpleType: agencyCostCodeType

Tag	agencyCostCodeType
Base	xs:string
pattern	[0-9]{5}|[0-9]{6}

6.7 simpleType: apptMethodType

Tag	apptMethodType
Base	xs:string
enumeration	Online

Copyright © 2016 USPS®. All Rights Reserved.

enumeration	Phone
enumeration	Webservices - Detail
enumeration	Webservices - No Detail

6.8 simpleType: apptStateType

Tag	apptStateType
Base	xs:string
enumeration	Scheduled
enumeration	Arrived
enumeration	ApptValidated
enumeration	WaitingToBeUnloaded
enumeration	Unloading
enumeration	FinishedUnloading
enumeration	ResolvingProblems
enumeration	Rejected
enumeration	Closed

6.9 simpleType: apptStatusType

Tag	apptStatusType
Base	xs:string
enumeration	Open
enumeration	Closed
enumeration	No Show
enumeration	Unscheduled
enumeration	Rejected

6.10 simpleType: apptTypeType

Tag	apptTypeType
Base	xs:string
enumeration	Pallet
enumeration	DropAndPick
enumeration	Speedline
enumeration	Bedload

6.11 simpleType: barcodeRateType

Tag	barcodeRateType
Base	xs:string
enumeration	Y = Yes
enumeration	N = No
enumeration	O = Other

6.12 simpleType: billReasonCodeType

Tag	billReasonCodeType
Base	xs:string
enumeration	E = Free period for the mailpiece has expired
enumeration	F = Mailpiece is not Full Service compliant
enumeration	M = Mailpiece does meet mail quality standards
enumeration	N = Mailpiece is Unassociated but has a Full Service STID

6.13 simpleType: bundleDetailLevelType

Tag	bundleDetailLevelType
Base	xs:string

Copyright © 2016 USPS®. All Rights Reserved.

Tag	bundleDetailLevelType
enumeration	A = Firm
enumeration	B = Carrier Route
enumeration	C = 5-Digit
enumeration	D = Unique 3-Digit
enumeration	E = (Reserve for future)
enumeration	F = 3-Digit
enumeration	G = (Reserve for future)
enumeration	H = ADC
enumeration	I = AADC
enumeration	J = (Reserve for future)
enumeration	K = Origin MxADC
enumeration	L = MxADC
enumeration	M = MxAADC
enumeration	N = (Reserve for future)
enumeration	O = Working
enumeration	P = (Reserve for future)
enumeration	Q = (Reserve for future)
enumeration	R = Parcel
enumeration	S = Multi-Piece Parcel
enumeration	T = 3D Scheme
enumeration	U = 5D Scheme + L007
enumeration	V = NDC (previously as BMC)
enumeration	W = 5-Digit Super Scheme
enumeration	X = FSS Sort Plan

6.14 simpleType: bundleRecordStatusType

Tag	bundleRecordStatusType
Base	xs:string
enumeration	O = Original
enumeration	D = Delete
enumeration	I = Insert
enumeration	U = Update

6.15 simpleType: bundleStatusType

Tag	bundleStatusType
Base	xs:string
enumeration	Blank
enumeration	C = Cancel

6.16 simpleType: canadaAdMailOnlyType

Tag	canadaAdMailOnlyType
Base	xs:string
enumeration	ST = Standard
enumeration	LG = Large

6.17 simpleType: chargeableBundleLevelType

Tag	chargeableBundleLevelType
Base	xs:string
enumeration	3 = 3-Digit/SCF
enumeration	5 = 5-Digit/Carrier Route
enumeration	A = ADC/AADC
enumeration	C = Carrier Route

Copyright © 2016 USPS®. All Rights Reserved.

Tag	chargeableBundleLevelType
enumeration	F = Firm
enumeration	M = Mixed ADC and Mixed AADC

6.18 simpleType: chargeableContainerType

Tag	chargeableContainerType
Base	xs:string
enumeration	Sacks-Trays
enumeration	Pallets

6.19 simpleType: chargeableContainerLevelType

Tag	chargeableContainerLevelType
Base	xs:string
enumeration	3 = 3-Digit/SCF
enumeration	5 = 5-Digit/Carrier Route
enumeration	A = ADC/AADC
enumeration	M = Mixed ADC & Mixed AADC

6.20 simpleType: chargeableEntryLevelType

Tag	chargeableEntryLevelType
Base	xs:string
enumeration	B = Destination NDC (Previously BMC)
enumeration	C = Origin SCF
enumeration	D = DDU
enumeration	J = Origin ADC
enumeration	K = Origin NDC (previously BMC)
enumeration	O = Origin Post Office/ DMU
enumeration	R = Destination ADC
enumeration	S = Destination SCF

6.21 simpleType: classNotificationType

Tag	classNotificationType
Base	xs:string
enumeration	A = (Reserved for future use)
enumeration	B = First-Class Mail
enumeration	C = Periodicals, Initial Notification
enumeration	D = USPS Marketable Mail
enumeration	E = Package Services
enumeration	F = Periodicals, Follow-up Notifications

6.22 simpleType: closeoutIrregularitiesType

Tag	closeoutIrregularitiesType
Base	xs:string
enumeration	B = Broken Pallet
enumeration	C = Count doesn’t Match 8125
enumeration	D = Damaged Mail
enumeration	DR = Driver Refused to Assist
enumeration	G = Good
enumeration	IA = Improper Appointment Type
enumeration	IM = Improper Mail Class
enumeration	I = Improper Mail Makeup
enumeration	IF = Incorrect Mail Facility
enumeration	L = Load Unsafe

Copyright © 2016 USPS®. All Rights Reserved.

Tag	closeoutIrregularitiesType
enumeration	M = Mailing not separated by 8125
enumeration	MI = Miscellaneous
enumeration	NP = No Paperwork (Missing Paperwork)
enumeration	O = Others
enumeration	OW = Overweight Pallets
enumeration	NM = Package on NDC non-machinable
enumeration	P = Pallet Too Tall
enumeration	VS = Vehicle Size
enumeration	CP = Courtesy Pallets
enumeration	CM = Container does not match 8017
enumeration	SM = Separation does not match 8107
enumeration	AR = Altered Required Field on Form
enumeration	IO = Incorrect Entry Office
enumeration	MN = Missing Appointment Number
enumeration	MS = Missing Origin Signature and/or Round Stamp
enumeration	MF = Missing Required Mailer Field on Form
enumeration	MA = Multiple Appts Associated to Load
enumeration	NF = No Form with Shipment
enumeration	IP = Incorrect Processing Category
enumeration	PD = Past in Home Date

6.23 simpleType: communicationRoleType

Tag	communicationRoleType
Base	xs:string
enumeration	From
enumeration	To
enumeration	CC

6.24 simpleType: componentWeightSourceType

Tag	componentWeightSourceType
Base	String
enumeration	A = Agent (real-time)
enumeration	C = Calculated (formula)
enumeration	P = Postal (clerk)
enumeration	L = Logical (implied from rate)

6.25 simpleType: componentWeightStatusType

Tag	componentWeightStatusType
Base	String
enumeration	N = None Given
enumeration	P = Pending
enumeration	F = Final
enumeration	M = Manifest Weight as function

6.26 simpleType: consigneeContentIDType

Tag	consigneeContentIDType
Base	mailxml_base:s09

6.27 simpleType: containerBundleStatusType

Tag	containerBundleStatusType
Base	xs:string
enumeration	-1 = Failed

Copyright © 2016 USPS®. All Rights Reserved.

Tag	containerBundleStatusType
enumeration	0 = Pending
enumeration	1 = Success

6.28 simpleType: IMtbType

Tag	IMtbType
Base	String
maxLength	24
minLength	24

6.29 simpleType: IMpbType

Tag	IMpbType
Base	String
maxLength	34
minLength	34

6.30 simpleType: containerAcceptanceDateType

Tag	containerAcceptanceDateType
Base	xs:date

6.31 simpleType: cccLevelType

Tag	cccLevelType
Base	xs:string
enumeration	3 = 3-Digit/SCF
enumeration	5 = 5-Digit/Carrier Route
enumeration	A = ADC/AADC
enumeration	M = Mixed ADC & Mixed AADC

6.32 simpleType: containerGrossWeightType

Tag	containerGrossWeightType
Base	mailxml_base:s05

6.33 simpleType: containerHeightType

Tag	containerHeightType
Base	mailxml_base:n03

6.34 simpleType: containerLevelType

How to Read:

Each Container Level Type Code shows the English translation of the code. Underneath the code there is “Eligibility Type” codes of “S” for Sack, “T” for Trays and “P” for Pallets. The Mailer must understand that to use any specific container level, the container type must be one of the following: Sack, Tray, or Pallet or all of the following or combination of some.

For example – Container Level Code “A” means “CR-Direct” and it can only be used if the container types are: Sack, Tray, and Pallet.

For some Container Level Code – there is an asterisk (*) followed by “Not Supported Enumeration” text. This means that the code is not currently supported by *PostalOne!*

Tag	containerLevelType
Base	xs:string

Copyright © 2016 USPS®. All Rights Reserved.

Tag	containerLevelType
enumeration	A = CR-Direct Eligibility Type = S, T, P
enumeration	B = Mixed CR in 5 Digit Eligibility Type = S, T, P
enumeration	C = Mixed CR in 3 Digit Eligibility Type = S, T
enumeration	D = CR – 5D Scheme Eligibility Type = S, T, P
enumeration	E = FSS Scheme
enumeration	F = FSS Facility
enumeration	G = 5 Digit (Auto/Presort) Eligibility Type = S, T, P
enumeration	H = 5 Digit (Merged) Eligibility Type = S, T, P
enumeration	I = 5 Digit (Presort Only) Eligibility Type = S, T, P
enumeration	J = 5 Digit (Barcode Only) Eligibility Type = S, T, P
enumeration	K = Metro Scheme Eligibility Type = P
enumeration	M = 5D Scheme (Presort) Eligibility Type = S, T, P
enumeration	N = 5D Scheme (Auto/Presort) Eligibility Type = S, T, P
enumeration	P = 5D Scheme (Barcode) Eligibility Type = S, T, P
enumeration	Q = 5D Scheme (Merged) Eligibility Type = S, T, P
enumeration	R = 3 Digit (Auto, Presort) Eligibility Type = S, T
enumeration	S = 3 Digit (Barcode) Eligibility Type = S, T
enumeration	T = 3 Digit (Presort) Eligibility Type = S, T
enumeration	U = 3 Digit (CR, Auto, Presort) Eligibility Type = S, T, P
enumeration	V = 3 Digit Scheme Eligibility Type = T
enumeration	W = Deleted – Place Holder
enumeration	X = SCF Eligibility Type = S, P
enumeration	Y = Protected SCF Eligibility Type = P
enumeration	Z = ADC Eligibility Type = S, T, P
enumeration	AA = AADC Eligibility Type = T
enumeration	AB = Mixed ADC Eligibility Type = S, T, P
enumeration	AC = Mixed AADC Eligibility Type = T
enumeration	AD = ASF Eligibility Type = S, P
enumeration	AE = NDC (previously known as BMC) Eligibility Type = S, P

Copyright © 2016 USPS®. All Rights Reserved.

Tag	containerLevelType
enumeration	AF = Protected NDC Eligibility Type = P
enumeration	AG = Mixed NDC Eligibility Type = S, P
enumeration	AH = Origin MxADC Eligibility Types = S, T , P
enumeration	AI = Protected ADC Eligibility Types = P
enumeration	AJ = Single Piece Container Eligibility Type = S, T
enumeration	AK = MXDS – Mixed Surface Eligibility Type = P
enumeration	AL = MXDA – Mixed Air CSA FCM Only Eligibility Type = P
enumeration	AM = Working Eligibility Type = P
enumeration	AN = Single Piece – First Class Eligibility Type = P
enumeration	AO = Surface Eligibility Type = P
enumeration	AP = Air Eligibility Type = P
enumeration	AQ = Local Eligibility Type = P
enumeration	BA = Urban Direct Eligibility Type = S, T
enumeration	BB = Rural Direct Eligibility Type = S, T
enumeration	BC = Station Eligibility Type = S, T, P
enumeration	BD = City Eligibility Type = S, T, P
enumeration	BE = FSA Eligibility Type = P
enumeration	BF = DCF Eligibility Type = S, T, P
enumeration	BG = FCP Eligibility Type = S, T, P
enumeration	BH = Province Eligibility Type = P
enumeration	BI = Residual Eligibility Type = S, T, P
enumeration	BJ = Foreign Eligibility Type = S, T, P
enumeration	BK = Country Eligibility Type = S, T, P
enumeration	BL = Mixed Country Eligibility Type = S, T, P
enumeration	BM = M Bags Eligibility Type = S

6.35 simpleType: containerPickupDateType

Tag	containerPickupDateType
Base	xs:date

Copyright © 2016 USPS®. All Rights Reserved.

6.36 simpleType: containerPickupTimeType

Tag	containerPickupTimeType
Base	xs:time

6.37 simpleType: containerShipDateType

Tag	containerShipDateType
Base	xs:date

6.38 simpleType: containerShipTimeType

Tag	containerShipTimeType
Base	xs:time

6.39 simpleType: contactType

Tag	contactType
Base	xs:string
enumeration	AccountManager
enumeration	Carrier
enumeration	CrossDock
enumeration	CustomerService
enumeration	HelpDesk
enumeration	DropShipCoordinator
enumeration	ApptCoordinator
enumeration	Plant
enumeration	InboundFreightCoordinator
enumeration	SalesOffice
enumeration	TruckDriver
enumeration	Warehouse
enumeration	Other

6.40 simpleType: containerHeightSourceType

Tag	containerHeightSourceType
Base	xs:string
enumeration	A = Actual
enumeration	E = Estimated

6.41 simpleType: CQTdatabaseIDType

Tag	CQTdatabaseIDType
Base	xs:nonNegativeInteger
totalDigits	8
whiteSpace	collapse

6.42 simpleType: creditDebitIndicator

Tag	creditDebitIndicator
Base	xs:string
enumeration	C = Credit
enumeration	D = Debit

6.43 simpleType: CRIDType

Tag	CRIDType
Base	xs:string
maxLength	15

Copyright © 2016 USPS®. All Rights Reserved.

Tag	CRIDType
minLength	1
pattern	([0-9])*

6.44 simpleType: cRIDStatusType

Tag	cRIDStatusType
Base	xs:string
enumeration	New
enumeration	Existing

6.45 simpleType: csaTemplateType

Tag	csaTemplateType
Base	xs:string
enumeration	PVDS-PER = Periodicals Plant Verified Drop Shipment
enumeration	DMU-C = DMU Verified Customer Transported
enumeration	DMU-P = DMU Verified Postal Transported
enumeration	BMEU = BMEU Verified
enumeration	UPVDS-PER = Unscheduled Periodicals Plant Verified Drop Shipment
enumeration	UDMU-C = Unscheduled DMU Verified Customer Transported
enumeration	UDMU-P = Unscheduled DMU Verified Postal Transported
enumeration	UBMEU = Unscheduled BMEU Verified
enumeration	U = Unscheduled

6.46 simpleType: csaStatusType

Tag	csaStatusType
Base	xs:string
enumeration	ACT = Active
enumeration	PEN = Pending
enumeration	INACT = Inactive
enumeration	INCOMP = Incomplete
enumeration	PREAPP = Pre-Approval

6.47 simpleType: databaseContainerIDType

Tag	databaseContainerIDType
Base	xs:nonNegativeInteger
totalDigits	6

6.48 simpleType: dayFrequencyType

Tag	dayFrequencyType
Base	xs:string
enumeration	Daily
enumeration	Monday
enumeration	Tuesday
enumeration	Wednesday
enumeration	Thursday
enumeration	Friday
enumeration	Saturday
enumeration	Sunday

6.49 simpleType: daysOfWeekType

Tag	daysOfWeekType
Base	xs:string

Copyright © 2016 USPS®. All Rights Reserved.

Tag	daysOfWeekType
enumeration	MON
enumeration	TUE
enumeration	WED
enumeration	THU
enumeration	FRI
enumeration	SAT
enumeration	SUN
enumeration	MF
enumeration	MS
enumeration	ALL
enumeration	H

6.50 simpleType: DirectOrMixedCategoryType

Tag	DirectOrMixedCategoryType
Base	String
enumeration	Direct
enumeration	Mixed

6.51 simpleType: dec18-8

Tag	dec18
Base	xs:decimal
totalDigits	18
fractionDigits	8

6.52 simpleType: deliverabilityCodeType

Tag	deliverabilityCodeType
Base	xs:string
enumeration	K = COA Match, No Forwarding Address
enumeration	G = COA Match, PO Box Closed, No Forwarding Address
enumeration	W = COA Match with a temporary COA

6.53 simpleType: electronicFileType

Tag	deliverabilityCodeType
Base	String 1
enumeration	1=Postage & Tracking File
enumeration	2=Tracking File
enumeration	3=Return Service
enumeration	4=Corrections
enumeration	5=Electronic Verification
enumeration	C=Parcel Return Service

6.54 simpleType: emailType

Tag	emailType
Base	xs:string

6.55 simpleType: enclosedByType

Tag	enclosedByType
Base	xs:string
enumeration	SM = USPS Marketable Mail
enumeration	BP = Bound Printed Matter

Copyright © 2016 USPS®. All Rights Reserved.

Tag	enclosedByType
enumeration	PE = Periodicals
enumeration	PP = Parcel Post
enumeration	ML = Media/Library Mail

6.56 simpleType: entryDiscountType

Tag	entryDiscountType
Base	xs:string
enumeration	N = None
enumeration	B = DNDC (previous DBMC)
enumeration	S = DSCF
enumeration	D = DDU
enumeration	A = DADC

6.57 simpleType: entryFacilityType

Tag	entryFacilityType
Base	xs:string
enumeration	O = Origin
enumeration	B = NDC (Previous BMC)
enumeration	S = SCF
enumeration	D = DDU
enumeration	A = ADC

6.58 simpleType: entryPointEDPostalCodeType

Tag	entryPointEDPostalCodeType
Base	mailxml_base:s06

6.59 simpleType: entryPointEDFacilityTypeType

Tag	entryPointEDFacilityTypeType
Base	mailxml_base:s01

6.60 simpleType: entryPointADLocaleKeyType

Tag	entryPointADLocaleKeyType
Base	mailxml_base:s09

6.61 simpleType: entryPointADPostalCodeType

Tag	entryPointADPostalCodeType
Base	mailxml_base:s09

6.62 simpleType: es3

Tag	es3
Base	xs:string
maxLength	3
minLength	3
whiteSpace	preserve

6.63 simpleType: es4

Tag	es4
Base	xs:string
maxLength	4

Copyright © 2016 USPS®. All Rights Reserved.

Tag	es4
minLength	4
whiteSpace	preserve

6.64 simpleType: es5

Tag	es5
Base	xs:string
maxLength	5
minLength	5
whiteSpace	preserve

6.65 simpleType: exemptionCodeType

Tag	exemptionCodeType
Base	xs:string
enumeration	APO = All Periodicals
enumeration	APS = All Perishable
enumeration	CAPC = Cancelled within two hours
enumeration	DUE = Delivery Unit Exemption
enumeration	HC = Holiday Contingency Constraint Change

6.66 simpleType: fASTSchedulerIDType

Tag	fASTSchedulerIDType
Base	mailxml_base:s12

6.67 simpleType: feeNotificationType

Tag	feeNotificationType
Base	String
enumeration	E = Electronic Fee Charged
enumeration	1 = Automated Fee 1st Notice
enumeration	2 = Automated Fee 2nd Notice
enumeration	3 = Automated Fee Charged for 3 or more notices

6.68 simpleType: flatRateIndicatorType

Tag	flatRateIndicatorType
Base	xs:string
enumeration	B = Box – Priority Mail Flat Rate Only
enumeration	C = Priority Mail Critical Mail – Letter
enumeration	E = Envelope – Priority Mail Flat Rate Only
enumeration	F = Priority Mail Critical Mail – Flat
enumeration	L = Box – Large Priority Mail Flat Rate Only
enumeration	M = Box – Large Military Destination Priority Mail Flat Rate Only
enumeration	O = Priority Mail Padded Flat Rate Envelope
enumeration	P = Priority Mail Legal Flat Rate Envelope
enumeration	S = Small – Priority Mail Flat Rate Only

6.69 simpleType: formType

Tag	formType
Base	xs:string
enumeration	PM = Priority Mail
enumeration	FC = First-Class
enumeration	SM = USPS Marketable Mail

Copyright © 2016 USPS®. All Rights Reserved.

Tag	formType
enumeration	BP = Bound Printed Matters
enumeration	PE = Periodicals
enumeration	PP = Parcel Post
enumeration	ML = Media/Library Mail
enumeration	IM = International Mailing
enumeration	PS=Parcel Select

6.70 simpleType: fullServiceComplianceIndicatorType

Tag	fullServiceComplianceIndicatorType
Base	mailxml_base:yesNo
enumeration	Yes
enumeration	No

6.71 simpleType: fspiType

Tag	fspiType
Base	xs:string
enumeration	M = Mixed
enumeration	F = Full-Service

6.72 simpleType: gPSSystemType

Tag	gPSSystemType
Base	xs:string
enumeration	ECEF
enumeration	HAE
enumeration	MSL

6.73 simpleType: IDType

Tag	IDType
Base	xs:string
enumeration	DriversLicense
enumeration	EmployeeID

6.74 simpleType: IMcbType

Tag	IMcbType
Base	xs:string
maxLength	24
minLength	21

6.75 simpleType: iMBType

Tag	iMBType
Base	xs:string
maxLength	34
minLength	20
pattern	([0-9])+

6.76 simpleType: iMBarcodeIDType

Tag	iMBarcodeIDType
Base	mailxml_base:ns02

Copyright © 2016 USPS®. All Rights Reserved.

6.77 simpleType: iMBSerialNumber6Type

Tag	iMBSerialNumber6Type
Base	mailxml_base:ns06

6.78 simpleType: iMBSerialNumber9Type

Tag	iMBSerialNumber9Type
Base	mailxml_base:ns09

6.79 simpleType: iMBUpperSerializationType

Tag	iMBUpperSerializationType
Base	mailxml_base:s18

6.80 simpleType: iMBLowerSerializationType

Tag	iMBLowerSerializationType
Base	mailxml_base:s18

6.81 simpleType: incentiveTypeType

Tag	incentiveTypeType
Base	String
enumeration	1 = Incentive
enumeration	2 = ICM Incentive
enumeration	3 = Priority Mail International Incentive
enumeration	4 = Express Mail International Incentive

6.82 simpleType: includedInOtherDocType

Tag	includedInOtherDocType
Base	xs:string
enumeration	L = Linked
enumeration	O = Original

6.83 simpleType: internalDateType

Tag	internalDateType
Base	xs:date

6.84 simpleType: internationalPSPartType

Tag	internationalPSPartType
Base	String
enumeration	A = First Class Mail International Permit Imprint
enumeration	B = International Surface Airlift – ISAL
enumeration	C = International Priority Airmail – IPA
enumeration	D = Priority Mail International Permit Imprint
enumeration	E = Global Shipping Software (GSS) Permit Imprint – Priority Mail International
enumeration	F = Global Shipping Software Permit Imprint – Express Mail International
enumeration	G = Global Shipping Software Permit Imprint – Global Express Guaranteed
enumeration	H = Global Bulk Economy Mail Permit Imprint
enumeration	I = Global Direct Canada Admail Permit Imprint
enumeration	J = Global Direct Canada Publication Mail – Permit Imprint
enumeration	K = Global Direct Canada Letter Mail – Permit Imprint
enumeration	Q = Global Direct Permit Imprint
enumeration	R = Reserved
enumeration	S = Extra Services

Copyright © 2016 USPS®. All Rights Reserved.

6.85 simpleType: internationalZoneType

Tag	internationalZoneType
Base	String
enumeration	1 through 15

6.86 simpleType: internationalPSPartSectionType

Tag	internationalPSPartSectionType
enumeration	ICLM = Canada Incentive Letter Mail Standard (S/L) – Machinable
enumeration	ICLO = Canada Letter Mail Other (Non-Standard and Oversize)
enumeration	ICLP = Canada Incentive Letter Mail Standard (S/L) – Presort
enumeration	ICLPL = Canada Incentive Letter Mail Standard (S/L) – Presort Local
enumeration	ICLS = Canada Letter Mail Standard (S/L)
enumeration	ICOM = Canada Incentive Letter Mail Oversize (O/S) – Machinable
enumeration	ICOP = Canada Incentive Letter Mail Oversize (O/S) – Presort
enumeration	IEM = Express Mail International
enumeration	IEMF = Express Mail International Flat Rate Envelope
enumeration	IFCP = LCP Residual/Forward Consolidation Point (FCP)
enumeration	IFE = Flat Rate Envelope (Individual Weight Limit: 4 lbs)
enumeration	IFLB = Large Flat Rate Box (Individual Weight Limit: 20 lbs)
enumeration	IFMB = Medium Flat Rate Box (Individual Weight Limit: 20 lbs)
enumeration	IFSB = Small Flat Rate Box (Individual Weight Limit: 4 lbs)
enumeration	IGBB = Global Bulk Economy Mail-Base Price-New Jersey Entry
enumeration	IGBM = Global Bulk Economy Mail M-Bag New Jersey Entry
enumeration	IGD = Global Direct
enumeration	IGXG = Global Express Guaranteed (GXG)
enumeration	ILDC = LCP Distribution Center Facility
enumeration	ILDD = LCP Delivery Mode Direct
enumeration	ILDF = LCP Delivery Facility
enumeration	IMBG = M-Bag Airmail Sacks
enumeration	INDG = NDG Presort
enumeration	IPM = Priority Mail International
enumeration	IPMI = International Priority Mail IPA
enumeration	IPMM = International Priority Mail M-Bag IPA
enumeration	IRV = Reserved
enumeration	ISAL = International Surface Airlift – ISAL
enumeration	ISAM = International Surface Airlift M-Bag – ISAL

6.87 simpleType: internationalPriceGroupType

Tag	internationalPriceGroupType
Base	String
enumeration	1 = Canada
enumeration	2 = Mexico
enumeration	3 through 5 = China, Eastern Europe, Hong Kong, Japan, South Korea, Turkey, Western Europe
enumeration	6 through 9 = Africa, Asia (exception include price group 3 through 5), central America, Middle East, South America
enumeration	10 through 15 = Unknown – for future use

6.88 simpleType: inCountyOutCountyIndicatorType

Tag	inCountyOutCountyIndicatorType
Base	xs:string
enumeration	I – In County
enumeration	N = Outside County

Copyright © 2016 USPS®. All Rights Reserved.

6.89 simpleType: jobIDType

Tag	jobIDType
Base	xs:string
maxLength	8
minLength	1
whiteSpace	preserve

6.90 simpleType: localeKeyType

Tag	localeKeyType
Base	mailxml_base:s09

6.91 simpleType: inductionStatusType

Tag	inductionStatusType
Base	xs:string
enumeration	A = Accepted
enumeration	N = Rejected

6.92 simpleType: logicalPhysicalBundleIndicatorType

Tag	logicalPhysicalBundleIndicatorType
Base	xs:string
enumeration	P = Physical
enumeration	L = Logical

6.93 simpleType: logicalPhysicalContainerIndicatorType

Tag	logicalPhysicalContainerIndicatorType
Base	xs:string
enumeration	P = Physical
enumeration	L = Logical

6.94 simpleType: mailAgreementTypeType

Tag	mailAgreementTypeType
Base	xs:string
enumeration	A = Alternate Mailing System
enumeration	B = Optional Procedure
enumeration	C = Manifest Mailing
enumeration	D = Value Added
enumeration	E = Combined Mail
enumeration	F = Combined and Value Added

6.95 simpleType: mailClassType

Tag	mailClassType
Base	xs:string
enumeration	1 = First-Class Mail
enumeration	2 = Periodicals
enumeration	3 = USPS Marketable Mail
enumeration	4 = Package Services
enumeration	6 = (Future Placeholder)

6.96 simpleType: maildatContainerStatusType

Tag	maildatContainerStatusType

Copyright © 2016 USPS®. All Rights Reserved.

Tag	maildatContainerStatusType
Base	xs:string
enumeration	R = Ready to Pay
enumeration	X = Paid
enumeration	C = Cancel
enumeration	D = Delete
enumeration	P = Preliminary Postage Statement
enumeration	T = Transportation Information Update

6.97 simpleType: mailerID6Type

Tag	mailerID6Type
Base	mailxml_base:ns06

6.98 simpleType: mailerID9Type

Tag	mailerID9Type
Base	mailxml_base:ns09

6.99 simpleType: mailXMLContainerType

Tag	mailXMLContainerType
Base	xs:string
enumeration	1 = #1 Sack
enumeration	2 = #2 Sack
enumeration	3 = #3 Sack
enumeration	4 = 01V Sack
enumeration	5 = 03V Sack
enumeration	6 = OD Sack
enumeration	7 = OD Parcel
enumeration	8 = OD Full Tray Box
enumeration	9 = OD Half Tray Box
enumeration	10 = Flat Trays
enumeration	11 = FRE/FRB
enumeration	E = EMM Tray
enumeration	F = Flat Tub
enumeration	L = Logical Tray
enumeration	O = 1’ Tray
enumeration	P = Pallet
enumeration	S = Sack (General)
enumeration	T = 2’ Tray
enumeration	V = Sack (Virtual)
enumeration	B = Bedload
enumeration	U = Unit Load Device
enumeration	Y = PMOD Sacks
enumeration	Z = User Pallet
enumeration	X = (Future Placeholder)
enumeration	H = EIRS 61 – Hamper, Large Canvas
enumeration	A = EIRS 61P – Hamper, Large Plastic
enumeration	G = EIRS 66 – General Purpose Mail Container w/Gate
enumeration	D = EIRS 68 – Eastern Region Mail Container w/Web Door
enumeration	R = EIRS 84 – Wire Container Rigid
enumeration	C = EIRS 84C – Collapsible Wire Container
enumeration	M = Logical Pallet (MLOCR)
enumeration	AB = Air Box
enumeration	Y = PMOD Sack

Copyright © 2016 USPS®. All Rights Reserved.

6.100 simpleType: mailXMLPresentationCategoryType

Tag	mailXMLPresentationCategoryType
Base	xs:string
enumeration	M = MLOCR
enumeration	P = Conventional Presort
enumeration	I = Manifest Individual
enumeration	N = Single Piece
enumeration	S = Manifest Summary
enumeration	C = Consolidated Internal Copal job with linked logical and presort mailings

6.101 simpleType: manifestType

Tag	manifestType
enumeration	DM = Domestic Mail
enumeration	IM = International Mail

6.102 simpleType: manifestMailClassType

Tag	manifestMailClassType
enumeration	BB = BoundPrinted Material
enumeration	BL = Library Rate
enumeration	BP = Parcel Post
enumeration	BS = Media Mail
enumeration	CP = Priority Mail International Parcels
enumeration	DM = Domestic Matter for the Blind
enumeration	EX = Express Mail®
enumeration	FC = First Class Mail®
enumeration	IE = Express Mail International
enumeration	IL = Priority Mail International Letters
enumeration	LC = First Class Mail International
enumeration	PG = Global Express Guaranteed
enumeration	PM = Priority Mail
enumeration	PS = Parcel Select
enumeration	S2 = USPS Marketable Mail Non-Profit
enumeration	S3 = USPS Marketable Mail Enhanced Carrier Route
enumeration	S4 = USPS Marketable Mail Nonprofit Enhance Carrier Route
enumeration	SA = USPS Marketable Mail

6.103 simpleType: manifestRateLevelType

Tag	manifestRateLevelType
enumeration	AD = "ADC Rate”
enumeration	BA = "Basic Rate"
enumeration	BM = "Balloon Rate"
enumeration	BP = "Basic Bound Printed Matter Pre-bar coded"
enumeration	BS = "NDC Special Standard"
enumeration	B3 = "3-Digit Balloon Rate"
enumeration	CB = "Carrier Route Basic Rate"
enumeration	CD = "Express Mail Custom Design"
enumeration	CH = "Carrier Route High Density Rate"
enumeration	CR = "Carrier Route Rate"
enumeration	CS = "Carrier Route Saturation Rate"
enumeration	C1 = "Cubic Pricing Tier 1"
enumeration	C2 = "Cubic Pricing Tier 2"
enumeration	C3 = "Cubic Pricing Tier 3"
enumeration	C4 = "Cubic Pricing Tier 4"

Copyright © 2016 USPS®. All Rights Reserved.

Tag	manifestRateLevelType
enumeration	C5 = "Cubic Pricing Tier 5"
enumeration	DN = "Dimensional Nonrectangular Rate"
enumeration	DR = "Dimensional Rectangular Rate"
enumeration	E1 = "Express Mail Same Day Airport Flat Rate"
enumeration	E3 = "Express Mail Flat Rate Hold For Pickup"
enumeration	E4 = "Express Mail Flat Rate Post Office To Addressee"
enumeration	FB = "Priority Mail Medium Flat Rate Box"
enumeration	FE = "Flat Rate Envelope"
enumeration	IG = "P/PS<15Lbs, combined length/girth >84" & <= 108" subject to balloon rate"
enumeration	IM = "P/ PS between 108" and 130" subject to oversize rate"
enumeration	MA = "Mixed ADC Rate"
enumeration	MB = "Mixed NDC Rate"
enumeration	NP = "Non-presorted Rate"
enumeration	OS = "Oversize"
enumeration	PG = "PM<15lbs combined length/girth >84" & <=108" subject to balloon rate"
enumeration	PL = "Priority Mail Large Flat Rate Box"
enumeration	PM = "Priority Mail Large Flat Rate Box APO/FPO"
enumeration	PP = "Express Mail Hold For Pickup"
enumeration	PR = "Presorted Rate"
enumeration	RB = "Bulk Basic"
enumeration	SB = "Media Mail NDC"
enumeration	SP = "Single Piece Rate"
enumeration	S1 = "Single Piece – Flat"
enumeration	S2 = "Single Piece – Parcel"
enumeration	S5 = "Media Mail 5 Digit"
enumeration	1A = "Intra-NDC Single Piece Rate"
enumeration	1E = "Inter-NDC Single Piece Rate"
enumeration	2A = "Intra-NDC Balloon Rate"
enumeration	2E = "Inter-NDC Balloon Rate"
enumeration	3A = "Intra-NDC Oversized Rate"
enumeration	3D = "3-Digit Rate"
enumeration	3E = "Inter-NDC Oversized Rate"
enumeration	5D = "5 Digit Rate"
enumeration	5S = "5 Digit Special Standard"

6.104 simpleType: manifestExtraServiceCode

Tag	manifestExtraServiceCode
enumeration	420 = Parcel Return Service
enumeration	430 = Open & Distribute
enumeration	440 – Re Shipment
enumeration	910 = Certified Mail
enumeration	915 = COD
enumeration	920 – Delivery Confirmation
enumeration	921 = Signature Confirmation
enumeration	925 = Express Mail Merchandise Insurance
enumeration	930 = Insurance <=$200
enumeration	931 = Insurance >$200
enumeration	935 = Parcel Airlift (PAL)
enumeration	940 = Registered Mail
enumeration	950 = Restricted Delivery
enumeration	955 = Return Receipt
enumeration	957 = Return Receipt Electronic
enumeration	960 = Return Receipt for Merchandise
enumeration	970 = Special Handling

Copyright © 2016 USPS®. All Rights Reserved.

Tag	manifestExtraServiceCode
enumeration	980 = Merchandise Return Service (MRS)
enumeration	985 = Hold for Pickup

6.105 simpleType: mIDStatusType

Tag	mIDStatusType
Base	xs:string
enumeration	New
enumeration	Existing

6.106 simpleType: meteredAffixedMethodType

Tag	meteredAffixedMethodType
Base	xs:string
enumeration	C = Metered - Correct
enumeration	L = Metered – Lowest
enumeration	M = Metered - Neither

6.107 simpleType: monthType

Tag	monthType
Base	xs:nonNegativeInteger
maxInclusive	12
minInclusive	1

6.108 simpleType: moveUpdateMethodType

Tag	moveUpdateMethodType
Base	xs:integer
enumeration	0 = None
enumeration	1 = ACS
enumeration	2 = NCOA
enumeration	3 = FAST Forward
enumeration	4 = Mailer Move Update Process
enumeration	5 = Ancillary Service Endorsement
enumeration	6 = Multiple
enumeration	7 = N/A
enumeration	8 = OneCode ACS

6.109 simpleType: MPUIDType

Tag	MPUIDType
Base	xs:nonNegativeInteger
totalDigits	5

6.110 simpleType: ns02

Tag	ns02
Base	xs:string
pattern	[0-9]{2}

6.111 simpleType: ns03

Tag	ns03
Base	xs:string
pattern	[0-9]{3}

Copyright © 2016 USPS®. All Rights Reserved.

6.112 simpleType: ns04

Tag	ns04
Base	xs:string
pattern	[0-9]{4}

6.113 simpleType: ns05

Tag	ns05
Base	xs:string
pattern	[0-9]{5}

6.114 simpleType: ns06

Tag	ns06
Base	xs:string
pattern	[0-9]{6}

6.115 simpleType: ns09

Tag	ns09
Base	xs:string
pattern	[0-9]{9}

6.116 simpleType: ns10

Tag	ns10
Base	xs:string
pattern	[0-9]{10}

6.117 simpleType: ns11

Tag	ns11
Base	xs:string
pattern	[0-9]{11}

6.118 simpleType: ns22

Tag	ns22
Base	xs:string
pattern	[0-9]{22}

6.119 simpleType: n01

Tag	n01
Base	xs:positiveInteger
totalDigits	1

6.120 simpleType: n02

Tag	n02
Base	xs:positiveInteger
totalDigits	2

6.121 simpleType: n03

Tag	n03
Base	xs:nonNegativeInteger
totalDigits	3

Copyright © 2016 USPS®. All Rights Reserved.

6.122 simpleType: n05

Tag	n05
Base	xs:nonNegativeInteger
totalDigits	5

6.123 simpleType: n06

Tag	n06
Base	xs:nonNegativeInteger
totalDigits	6

6.124 simpleType: addressType

Tag	addressType
Base	xs:string
enumeration	F = Foreign
enumeration	G = General Delivery
enumeration	H = Highway Route Contract
enumeration	P = Post Office Box
enumeration	R = Rural Route
enumeration	S = Street Address
enumeration	U = Urbanization Name
enumeration	V = Highway Contract Route with box number
enumeration	X = Rural Route with box number

6.125 simpleType: operatngModeType

Tag	operatngModeType
Base	xs:string
enumeration	N = Normal
enumeration	B = ByPass

6.126 simpleType: onePassPlannedOrActualFlagType

Tag	onePassPlannedOrActualFlagType
Base	xs:string
enumeration	A = Actual
enumeration	P = Planned

6.127 simpleType: packageIDType

Tag	packageIDType
Base	mailxml_base:s06

6.128 simpleType: PackageServicesType

Tag	PackageServicesType
Base	xs:string
enumeration	PS = Postage Statement
enumeration	BPM = Bound Printed Matter
enumeration	LIB = Library
enumeration	MEDIA = Media
enumeration	PP = Picture Permit

6.129 simpleType: packagingMethodType

Tag	packagingMethodType
Base	xs:string

Copyright © 2016 USPS®. All Rights Reserved.

Tag	packagingMethodType
enumeration	0 = Piece Count
enumeration	1 = Weight
enumeration	2 = Both

6.130 simpleType: palletHandlingUnitType

Tag	palletHandlingUnitType
Base	xs:string
enumeration	Airbox
enumeration	Sacks
enumeration	Bundles
enumeration	MixedLengthTrays
enumeration	1ft Tray
enumeration	2ft Tray
enumeration	EMM Tray
enumeration	Flat Tub
enumeration	Parcels

6.131 simpleType: palletType

Tag	palletType
Base	xs:string
enumeration	Airbox
enumeration	Pallet
enumeration	EIRS 61 - Hamper, Large Canvas
enumeration	EIRS 61P - Hamper, Large Plastic
enumeration	EIRS 66 - General Purpose Mail Container w/Gate
enumeration	EIRS 68 - Eastern Region Mail Container w/Web Door
enumeration	EIRS 84 - Wire Container Rigid
enumeration	EIRS 84C - Collapsible Wire Container

6.132 simpleType: parentContainerRefIDType

Tag	parentContainerRefIDType
Base	mailxml_base:s06

6.133 simpleType: percentageType

Tag	percentageType
Base	xs:decimal
totalDigits	5
fractionDigits	2
minInclusive	0.00
maxInclusive	100.00

6.134 simpleType: periodicalPriceType

Tag	periodicalPriceType
Base	xs:string
enumeration	D = Non-Advertising Pound Rate – DSCF (B13)
enumeration	C = Non-Advertising Pound Rate – DDU (B12)
enumeration	E = Non-Advertising Pound Rate – DADC (B14)
enumeration	R = Repositionable notes (surcharge) (A21, F2)
enumeration	Z = Non-Advertising Pound Rate – All Others (B15)
enumeration	5 = Non-Advertising Piece Rate (C30)
enumeration	9 = Ride-along Surcharge (A20, F1)
enumeration	1 = DDU (A17)

Copyright © 2016 USPS®. All Rights Reserved.

6.135 simpleType: permitTypeType

Tag	permitTypeType
Base	xs:string
enumeration	PI = Permit Imprint
enumeration	MT = Metered Tape
enumeration	PC = Pre-cancelled Stamps
enumeration	BR = Business Reply
enumeration	PE = Periodicals
enumeration	GH = Ghost
enumeration	OI = Official Imprint
enumeration	OM = Official Imprint
enumeration	PP = Pending Periodicals
enumeration	PA = Partial Permit Imprint

6.136 simpleType: phoneNumberType

Tag	phoneNumberType
Base	xs:string
maxLength	25
minLength	1
whiteSpace	preserve

6.137 simpleType: pickupOrDeliveryType

Tag	pickupOrDeliveryType
Base	xs:string
enumeration	Pickup
enumeration	Delivery

6.138 simpleType: planetCodeType

Tag	planetCodeType
Base	xs:string
maxLength	13
minLength	11
pattern	[0-9]{2}

6.139 simpleType: postageGroupingIDType

Tag	postageGroupingIDType
Base	mailxml_base:s08

6.140 simpleType: postagePaymentMethodType

Tag	postagePaymentMethodType
Base	xs:string
enumeration	S = Stamp
enumeration	M = Metered: Neither
enumeration	P = Permit

6.141 simpleType: postageStatementLineNumber1Type

Tag	postageStatementLineNumber1Type
Base	xs:string
enumeration	E26
enumeration	E27
enumeration	E28
enumeration	E29

Copyright © 2016 USPS®. All Rights Reserved.

Tag	postageStatementLineNumber1Type
enumeration	E30
enumeration	E31
enumeration	E32
enumeration	E33
enumeration	E34
enumeration	E35
enumeration	E36
enumeration	E37
enumeration	E38
enumeration	E39
enumeration	E40
enumeration	E41
enumeration	E42
enumeration	E43
enumeration	E44
enumeration	E45
enumeration	E46

6.142 simpleType: postageStatementLineNumber2Type

Tag	postageStatementLineNumber2Type
Base	xs:string
enumeration	E1
enumeration	E2
enumeration	E3
enumeration	E4
enumeration	E5
enumeration	E6
enumeration	E7
enumeration	E8
enumeration	E9
enumeration	E10
enumeration	E11
enumeration	E12
enumeration	E13
enumeration	E14
enumeration	E15
enumeration	E16
enumeration	E17
enumeration	E18
enumeration	E19
enumeration	E20
enumeration	E21
enumeration	E22
enumeration	E23
enumeration	E24

6.143 simpleType: postageStatementLineNumber3Type

Tag	postageStatementLineNumber3Type
Base	xs:string
enumeration	D1
enumeration	D2
enumeration	D3
enumeration	D4
enumeration	D5

Copyright © 2016 USPS®. All Rights Reserved.

Tag	postageStatementLineNumber3Type
enumeration	D6
enumeration	D7
enumeration	D8
enumeration	D9
enumeration	D10
enumeration	D11
enumeration	D12
enumeration	D13
enumeration	D14
enumeration	D15
enumeration	D16
enumeration	D17

6.144 simpleType: postageStatementStatusType

Tag	postageStatementStatusType
Base	xs:string
enumeration	UPD = Updated
enumeration	FIN = Finalized
enumeration	REW = Rework
enumeration	REV = Reversed
enumeration	CAN = Cancelled
enumeration	FAI = Failed Verification
enumeration	PEN = Pending
enumeration	PAS = Passed
enumeration	INC = Incomplete
enumeration	NAP = Not Available for Processing
enumeration	EST = Estimate Postage
enumeration	CON = Consolidated Postage Statement
enumeration	ERR = Error
enumeration	COM = Complete
enumeration	AVW = Address Verification Warning
enumeration	PAV = Pending Address Verification
enumeration	FPP = Finalized Pending Payment

6.145 simpleType: priceType

Tag	priceType
Base	xs:string
enumeration	commercial
enumeration	commercialplus
enumeration	retail
enumeration	NSA

6.146 simpleType: primarySecondaryIndicatorType

Tag	primarySecondaryIndicatorType
Base	xs:string
enumeration	P = Primary
enumeration	S = Secondary

6.147 simpleType: processingCategoryType

Tag	processingCategoryType
Base	xs:string
enumeration	LT = Letter

Copyright © 2016 USPS®. All Rights Reserved.

Tag	processingCategoryType
enumeration	FL = Flat
enumeration	CD = Card
enumeration	OS = Outside Parcel
enumeration	MP = Machinable Parcel
enumeration	IR = Irregular Parcel
enumeration	PF = Parcel, First Class
enumeration	CM = Custom Mail
enumeration	NP = Non-Machinable Parcel
enumeration	NA = Non-Flat Machinable Piece < 6oz
enumeration	NB = Non-Flat Machinable Piece > 6oz
enumeration	SP = Small Packets
enumeration	MB = M-Bags

6.148 simpleType: processingCodeType

Tag	processingCodeType
Base	xs:string
enumeration	S = Surface
enumeration	MXDS = Mixed Surface
enumeration	L = Locale
enumeration	WKG = Working Mail
enumeration	A = Air Separation
enumeration	MXDA = Mixed Air
enumeration	SP = Single Piece

6.149 simpleType: qualificationReportClassType

Tag	qualificationReportClassType
Base	xs:string
enumeration	FC = First Class
enumeration	S = USPS Marketable Mail
enumeration	P = Periodicals
enumeration	PM = Priority Mail
enumeration	PP = Parcel Post
enumeration	A = Air Mail
enumeration	PS = Parcel Select

6.150 simpleType: rateCategoryType

Tag	rateCategoryType
Base	xs:string
enumeration	A = Saturation ECR
Enumeration	A1 = Non-Automation Saturation – ECR
enumeration	AF = Saturation ECT Letter
enumeration	B = High Density ECR
Enumeration	B1 = Non-Automation High Density - ECR
enumeration	BF = High Density SCR Letter
enumeration	D = Carrier Route
enumeration	D1 = Non Automation Carrier Route
enumeration	DF = Carrier Letter
enumeration	E = 5 Digit Barcode
enumeration	FB = Firm Bundle (Not In-County)
enumeration	G = 5D Non-Barcode
enumeration	GF = 5D Letter
enumeration	H = 3 Digit Barcode
enumeration	K = 3D Non-Barcode

Copyright © 2016 USPS®. All Rights Reserved.

Tag	rateCategoryType
enumeration	KF = 3D Letter
enumeration	L = Basic Barcode
enumeration	L1 = AADC Barcode
enumeration	L2 = Mixed AADC Barcode
enumeration	L3 = ADC Barcode
enumeration	L4 = Mixed ADC Barcode
enumeration	L5 = ADC Non-Barcode
enumeration	L6 = Mixed ADC Non-Barcode
enumeration	L7 = AADC Non-Barcode
enumeration	L8 = Mixed AADC Non-Barcode
enumeration	N = Basic Non-Automation (Basic Presorted)
enumeration	O = Carrier Route – Barcode
enumeration	O1 = Non Automation Carrier Route – Barcode * CURRENTLY NOT ALLOWED TO BE USED.
enumeration	NG = 5 Digit Non Flat Machinable
enumeration	NK = 3 Digit Non Flat Machinable
enumeration	N5 = NDC Non Flat Machinable
enumeration	N6 = Mixed NDC Non Flat Machinable
enumeration	PI = 5 Digit Parcel 0.2063 Pounds or less
enumeration	PM = 3 Digit Parcel 0.2063 Pounds or less
enumeration	P7 = NDC Parcel 0.2063 Pounds or less
enumeration	P8 = Mixed NDC Parcel 0.2063 Pounds or less
enumeration	PE = 5 Digit Machinable Parcel over 0.2063 Pounds
enumeration	PQ = NDC Machinable Parcel over 0.2063 Pounds
enumeration	PR = Mixed NDC Machinable Parcel over 0.2063 Pounds
enumeration	PG = 5 Digit Irregular Parcel over 0.2063 Pounds
enumeration	PK = 3 Digit Irregular Parcel over 0.2063 Pounds
enumeration	P5 = NDC Irregular Parcel over 0.2063 Pounds
enumeration	P6 = Mixed NDC Irregular Parcel over 0.2063 Pounds
enumeration	S = Single Piece
enumeration	Z1 = Parcel Post (NDC Sort)
enumeration	Z2 = Parcel Post (ONDC Sort)
enumeration	P10 = Priority Mail Regional Rate Box A (max weight 15 lbs)
enumeration	P11 = Priority Mail Regional Rate Box B (max weight 20 lbs)
enumeration	P12 = Priority Mail – Cubic Tier 1 (up to .10 lbs)
enumeration	P13 = Priority Mail – Cubic Tier 2 (up to .20 lbs)
enumeration	P14 = Priority Mail – Cubic Tier 3 (up to .30 lbs)
enumeration	P15 = Priority Mail – Cubic Tier 4 (up to .40 lbs)
enumeration	P16 = Priority Mail – Cubic Tier 5 (up to .50 lbs)
enumeration	IA10 = International Postcards
enumeration	IA11 = Letters (up to 3.5 ounces), Flats and Packages/Small Packets (up to 4 pounds)
enumeration	IA12 = Nonmachinable Surcharge (letters only, up to 3.5 ounces)
enumeration	IA13 = M-Bag Airmail
enumeration	IB14 = Worldwide Nonpresort
enumeration	IB15 = International Surface Air Lift-M-Bag-ISAL
enumeration	IC15 = International Priority Mail-IPA
enumeration	IC17 = Worldwide Nonpresort
enumeration	IC18 = International Priority Mail-M-Bag-IPA
enumeration	ID19 = Priority Mail International
enumeration	ID20 = Flat Rate Envelopes (Individual Weight Limit: 4 lbs.) (15" x 9 1/2" or Smaller)
enumeration	ID21 = Padded Flat Rate Envelope (Individual Weight Limit: 4 lbs.)
enumeration	ID22 = Small Flat Rate Boxes (Individual Weight Limit: 4 lbs.) (Including items O-Small FRBX, ODVDS, and O-1096-L)
enumeration	ID23 = Medium Flat Rate Boxes (Individual Weight Limit: 20 lbs.)

Copyright © 2016 USPS®. All Rights Reserved.

Tag	rateCategoryType
enumeration	ID24 = Large Flat Rate Box (Individual Weight Limit: 20 lbs.)
enumeration	IE25 = Flat Rate Envelopes (Individual Weight Limit: 4 lbs.) (15" x 9 1/2" or Smaller)
enumeration	IE26 = Padded Flat Rate Envelope (Individual Weight Limit 4 lbs.)
enumeration	IE27 = Small Flat Rate Boxes (Individual Weight Limit: 4 lbs.) (Including items O-Small FRBX, ODVDS, and O-1096-L)
enumeration	IE28 = Medium Flat Rate Boxes (Individual Weight Limit: 20 lbs.)
enumeration	IE29 = Large Flat Rate Box (Individual Weight Limit: 20 lbs.)
enumeration	IF30 = Express Mail International
enumeration	IF31 = Express Mail International Flat Rate Envelopes (15" x 9 1/2" or Smaller)
enumeration	IG32 = Global Express Guaranteed (GXG)
enumeration	IH33 = Global Bulk Economy Mail-Base Prices-New Jersey Entry
enumeration	IH34 = Global Bulk Economy Mail-M-Bag - New Jersey Entry
enumeration	II35 = NDG Presort
enumeration	II36 = LCP Delivery Mode Direct
enumeration	II37 = LCP Delivery Facility
enumeration	II38 = LCP Distribution Center Facility (DCF)
enumeration	II39 = LCP Forward Consolidation Point (FCP)
enumeration	II40 = LCP Residual
enumeration	II41 = Excess Weight Postage-if applicable (for items over 0.1100 lbs. up to 1.100 lbs. [over 1.76 oz. up to 17.6 oz.])
enumeration	IJ42 = NDG Presort
enumeration	IJ43 = LCP Delivery Mode Direct
enumeration	IJ44 = LCP Delivery Facility
enumeration	IJ45 = LCP Distribution Center Facility (DCF)
enumeration	IJ46 = LCP Forward Consolidation Point (FCP)
enumeration	IJ47 = LCP Residual
enumeration	IK48 = Canada Lettermail - Standard (S/L) - up to 1.0576 oz.
enumeration	IK49 = Canada Lettermail - Standard (S/L) -over 1.0576 oz. and up to 1.7632 oz.
enumeration	IK50 = Canada Lettermail - Other Lettermail (Non-standard and Oversize) - up to 3.5264 oz.
enumeration	IK51 = Canada Lettermail - Other Lettermail (Non-standard and Oversize) - over 3.5264 oz. and up to 7.0544 oz.
enumeration	IK52 = Canada Lettermail - Other Lettermail (Non-standard and Oversize) - over 7.0544 oz. and up to 10.5808 oz.
enumeration	IK53 = Canada Lettermail - Other Lettermail (Non-standard and Oversize) - over 10.5808 oz. and up to 14.1088 oz.
enumeration	IK54 = Canada Lettermail - Other Lettermail (Non-standard and Oversize) - over 14.1088 oz. and up to 17.6368 oz.
enumeration	IK55 = Canada Incentive Lettermail - Standard (S/L) Machineable - up to 1.0576 oz.
enumeration	IK56 = Canada Incentive Lettermail - Standard (S/L) Machineable - over 1.0576 oz. and up to 1.7632 oz.
enumeration	IK57 = Canada Incentive Lettermail - Standard (S/L) Machineable - over 1.7632 oz. and up to 3.5264 oz.
enumeration	IK58 = Canada Incentive Lettermail - Standard (S/L) - Presort - up to 1.0576 oz.
enumeration	IK59 = Canada Incentive Lettermail - Standard (S/L) - Presort - over 1.0576 oz. and up to 1.7632 oz.
enumeration	IK60 = Canada Incentive Lettermail - Standard (S/L) - Presort - over 1.7632 oz. and up to 3.5264 oz.
enumeration	IK61 = Canada Incentive Lettermail - Standard (S/L) - Presort Local - up to 1.0576 oz.
enumeration	IK62 = Canada Incentive Lettermail - Standard (S/L) - Presort Local - over 1.0576 oz. and up to 1.7632 oz.
enumeration	IK63 = Canada Incentive Lettermail - Standard (S/L) - Presort Local - over 1.7632 oz. and up to 3.5264 oz.
enumeration	IK64 = Canada Incentive Lettermail - Oversize (O/S) - Machineable - up to 3.5264 oz.
enumeration	IK65 = Canada Incentive Lettermail - Oversize (O/S) - Machineable - over 3.5264 oz. and up to 17.6368 oz.
enumeration	IK66 = Canada Incentive Lettermail - Oversize (O/S) - Presort - up to 3.5264 oz.
enumeration	IK67 = Canada Incentive Lettermail - Oversize (O/S) - Presort - over 3.5264 oz. and up to 17.6368 oz.

Copyright © 2016 USPS®. All Rights Reserved.

Tag	rateCategoryType
enumeration	IQ68 = Global Direct
enumeration	IR69 = Reserved
enumeration	PS1
enumeration	PS2
enumeration	PS3
enumeration	PS4
enumeration	PS5
enumeration	PS6
enumeration	PS7
enumeration	PS8
enumeration	PS9
enumeration	PS10
enumeration	PS11

6.151 simpleType: rateLevelType

Tag	rateLevelType
Base	xs:string
enumeration	SP = Single Piece
enumeration	5B = Auto 5 Digit
enumeration	3B = Auto 3 Digit
enumeration	AB = Auto ADC/AADC
enumeration	PSRT = Presort
enumeration	5D = Presort 5 Digit
enumeration	3D = Presort 3 Digit
enumeration	NDC = NDC Presort
enumeration	ONDC = ONDC Presort
enumeration	BP = USPS Marketable Mail NDC
enumeration	MP = Mixed NDC USPS Marketable Mail
enumeration	AD = ADC Presort
enumeration	MD = Mixed ADC Presort
enumeration	WS = Carrier Route Saturation
enumeration	HD = Carrier Route High Density
enumeration	CR = Carrier Route Basic
enumeration	MB = Auto Mixed ADC/AADC
enumeration	FB = Firm Bundle
enumeration	BB = Barcode Basic
enumeration	SCF

6.152 simpleType: rateLevelIndicatorType

Tag	rateLevelIndicatorType
Base	xs:string
enumeration	A = Auto (use with Rate Level 5B, 3B, AB, MB)
enumeration	B = Non-Auto (use with Rate Level 5D, 3D, AD, MD)
enumeration	C = ECR (use with Rate Level WS, HD, CR)
enumeration	M = Machinable (use with Rate Level AB, MB)
enumeration	N = Non-Machinable (use with Rate Level 5D, 3D, AD, MD)

6.153 simpleType: rateType

Tag	rateType
Base	xs:string
enumeration	R = Regular
enumeration	L = Library Mail

Copyright © 2016 USPS®. All Rights Reserved.

Tag	rateType
enumeration	B = Bound Printed Matter
enumeration	C = Classroom
enumeration	S = Science of Agriculture
enumeration	F = Media Mail
enumeration	A = Alt Delivery
enumeration	N = Non-Profit
enumeration	P = Parcel Post
enumeration	T = Priority Mail
enumeration	D = Parcel Select
enumeration	X = Other
enumeration	H = (Placeholders)
enumeration	M = Regional Ground
enumeration	Z = (Placeholders)
enumeration	E = Priority Mail Flat Fixed (Rate Envelope)
enumeration	G = Priority Mail Flat Fixed (rate Box)
enumeration	1 = UA (International)
enumeration	2 = UL (International)
enumeration	3 = UM (International)
enumeration	4 = UR (International)
enumeration	J = Priority Mail Flat – Large Box
enumeration	K = Priority Mail Flat – Large Box APO/FPO
enumeration	W = Science and Agriculture Limited
enumeration	Y = Regular Limited Circulation

6.154 simpleType: reasonCodeType

Tag	reasonCodeType
Base	xs:string
enumeration	A = Attempted – Not Known
enumeration	B = Returned for Better Address
enumeration	D = Outside Delivery Limits
enumeration	E = In Dispute
enumeration	I = Insufficient Address
enumeration	L = Illegible
enumeration	M = No Mail Receptacle
enumeration	N = No such number
enumeration	P = Deceased
enumeration	Q = Not Deliverable as Addressed/ Unable to Forward
enumeration	R = Refused
enumeration	S = No Such Street
enumeration	U = Unclaimed
enumeration	V = Vacant
enumeration	X = No Such Office

6.155 simpleType: recurringStatusType

Tag	recurringStatusType
Base	xs:string
enumeration	Active
enumeration	Pending
enumeration	All

6.156 simpleType: reservationNumberType

Tag	reservationNumberType
Base	mailxml_base:s15

Copyright © 2016 USPS®. All Rights Reserved.

6.157 simpleType: roleType

Tag	Mail.XML 14.0A
Base	xs:string
enumeration	Data Update Agent
enumeration	Owner
enumeration	Confirm Subscriber
enumeration	Confirm Data Receiver
enumeration	ACS Data Receiver
enumeration	ACS Subscriber
enumeration	List Owner
enumeration	Mail Creator
enumeration	Addressor
enumeration	Comail
enumeration	CoMingler
enumeration	MLOCR
enumeration	Mail Owner
enumeration	Mail Agent
enumeration	Entry Point Planner
enumeration	Shipment Planner
enumeration	Consolidator
enumeration	Secondary Consolidator
enumeration	Appointment Management Receiver
enumeration	Consignee/Product Receiver
enumeration	Dispatcher
enumeration	Tracker CONFIRM-scan
enumeration	Tracker CONFIRM-payer
enumeration	Tracker Seed Source
enumeration	Tracker Piece-level-scan
enumeration	Tracker ASN-scan
enumeration	Tracker Induction-scan
enumeration	Tracker Planet-code
enumeration	ACS receiver
enumeration	ACS payer
enumeration	Seamless Acceptance
enumeration	Seamless Verification
enumeration	Security
enumeration	Logistics Provider
enumeration	Carrier
enumeration	Data Brokering Agent
enumeration	Nixie
enumeration	StartTheClock
enumeration	ContainerVisibility
enumeration	DeliveryPointValidation

6.158 simpleType: responsibleTransportationPartyType

Tag	responsibleTransportationPartyType
Base	xs:string
enumeration	Shipper
enumeration	Consignee

6.159 simpleType: RoutingZipCodeType

Tag	RoutingZipCodeType
Base	xs:string
maxLength	11

Copyright © 2016 USPS®. All Rights Reserved.

Tag	RoutingZipCodeType
minLength	0

6.160 simpleType: s01

Tag	s01
Base	xs:string
maxLength	1
minLength	1
whiteSpace	preserve

6.161 simpleType: s02

Tag	s02
Base	xs:string
maxLength	2
minLength	1
whiteSpace	preserve

6.162 simpleType: s03

Tag	s03
Base	xs:string
maxLength	3
minLength	1
whiteSpace	preserve

6.163 simpleType: s04

Tag	s04
Base	xs:string
maxLength	4
minLength	1
whiteSpace	preserve

6.164 simpleType: s05

Tag	s05
Base	xs:string
maxLength	5
minLength	1
whiteSpace	preserve

6.165 simpleType: s06

Tag	s06
Base	xs:string
maxLength	6
minLength	1
whiteSpace	preserve

6.166 simpleType: s07

Tag	s07
Base	xs:string
maxLength	7
minLength	1
whiteSpace	preserve

Copyright © 2016 USPS®. All Rights Reserved.

6.167 simpleType: s08

Tag	s08
Base	xs:string
maxLength	8
minLength	1
whiteSpace	preserve

6.168 simpleType: s09

Tag	s09
Base	xs:string
maxLength	9
minLength	1
whiteSpace	preserve

6.169 simpleType: s10

Tag	s10
Base	xs:string
maxLength	10
minLength	1
whiteSpace	preserve

6.170 simpleType: s11

Tag	s11
Base	xs:string
maxLength	11
minLength	1
whiteSpace	preserve

6.171 simpleType: s12

Tag	s12
Base	xs:string
maxLength	12
minLength	1
whiteSpace	preserve

6.172 simpleType: s15

Tag	s15
Base	xs:string
maxLength	15
minLength	1
whiteSpace	preserve

6.173 simpleType: s16

Tag	s16
Base	xs:string
maxLength	16
minLength	1
whiteSpace	preserve

Copyright © 2016 USPS®. All Rights Reserved.

6.174 simpleType: s18

Tag	s18
Base	xs:string
maxLength	18
minLength	1
whiteSpace	preserve

6.175 simpleType: s20

Tag	s20
Base	xs:string
maxLength	20
minLength	1
whiteSpace	preserve

6.176 simpleType: s22

Tag	s22
Base	xs:string
maxLength	22
minLength	1
whiteSpace	preserve

6.177 simpleType: s25

Tag	s25
Base	xs:string
maxLength	25
minLength	1
whiteSpace	preserve

6.178 simpleType: s28

Tag	s28
Base	xs:string
maxLength	28
minLength	1
whiteSpace	preserve

6.179 simpleType: s30

Tag	s30
Base	xs:string
maxLength	30
minLength	1
whiteSpace	preserve

6.180 simpleType: s37

Tag	s37
Base	xs:string
maxLength	37
minLength	1
whiteSpace	preserve

6.181 simpleType: s40

Tag	Mail.XML 14.0A

Copyright © 2016 USPS®. All Rights Reserved.

Tag	Mail.XML 14.0A
Base	xs:string
maxLength	40
minLength	1
whiteSpace	preserve

6.182 simpleType: s45

Tag	s45
Base	xs:string
maxLength	45
minLength	1
whiteSpace	preserve

6.183 simpleType: s50

Tag	s50
Base	xs:string
maxLength	50
minLength	1
whiteSpace	preserve

6.184 simpleType: s60

Tag	s60
Base	xs:string
maxLength	60
minLength	1
whiteSpace	preserve

6.185 simpleType: s64

Tag	s64
Base	xs:string
maxLength	64
minLength	1
whiteSpace	preserve

6.186 simpleType: s66

Tag	s66
Base	xs:string
maxLength	66
minLength	1
whiteSpace	preserve

6.187 simpleType: s80

Tag	s80
Base	xs:string
maxLength	80
minLength	1
whiteSpace	preserve

6.188 simpleType: s256

Tag	s256
Base	xs:string

Copyright © 2016 USPS®. All Rights Reserved.

Tag	s256
maxLength	256
minLength	1
whiteSpace	preserve

6.189 simpleType: s260

Tag	s260
Base	xs:string
maxLength	260
minLength	1
whiteSpace	preserve

6.190 simpleType: sackingBasisType

Tag	sackingBasisType
Base	xs:string
enumeration	0 = Piece Count
enumeration	1 = 20 lbs.
enumeration	2 = 125 Pieces
enumeration	3 = 15 lbs.
enumeration	4 = Both

6.191 simpleType: scheduledInductionDateType

Tag	scheduledInductionDateType
Base	xs:date

6.192 simpleType: scheduledInductionTimeType

Tag	scheduledInductionTimeType
Base	xs:time

6.193 simpleType: scheduledInHomeDateType

Tag	scheduledInHomeDateType
Base	xs:date

6.194 simpleType: serialNumberSevenOrEleven

Tag	serialNumberSevenOrEleven
Base	String
Pattern	"[0-9]{7}|[0-9]{11}"

6.195 simpleType: serialNumberTenOrFourteen

Tag	serialNumberTenOrFourteen
Base	String
Pattern	"[0-9]{10}|[0-9]{14}"

6.196 simpleType: serviceLevelIndicatorType

Tag	serviceLevelIndicatorType
Base	xs:string
enumeration	F = Full-Service
enumeration	B = Basic
enumeration	P = POSTNET
enumeration	O = Other

Copyright © 2016 USPS®. All Rights Reserved.

6.197 simpleType: serviceCodeType

Tag	serviceCodeType
Base	xs:string
enumeration	CM = Certified Mail
enumeration	COD = Collect on Delivery
enumeration	CODE = Electronic Collect on Delivery
enumeration	COM = Certificate of Mailing
enumeration	DC = Delivery Confirmation
enumeration	DCE = Delivery Confirmation Electronic
enumeration	IM = Insured Mail
enumeration	PAL = Parcel Airlift
enumeration	RD = Restricted Delivery
enumeration	RM = Registered Mail
enumeration	RR = Return Receipt
enumeration	RRE = Return Receipt Electronic
enumeration	RRM = Return Receipt for Merchandise
enumeration	SC = Signature Confirmation
enumeration	SCE = Signature Confirmation Electronic
enumeration	SH = Special Handling
enumeration	AS = Adult Signature
enumeration	RAS = Restricted Adult Signature
enumeration	DCD = Day Certain Delivery
enumeration	CBM = Certificate of Bulk Mailing

6.198 simpleType: ServiceTypeCodeType

Tag	ServiceTypeCodeType
Base	mailxml_base:ns03

6.199 simpleType: sortationLevelType

Tag	sortationLevelType
Base	xs:string
enumeration	CRD
enumeration	5DG
enumeration	CR5
enumeration	5DGS
enumeration	CR5S
enumeration	M5D
enumeration	M5DS
enumeration	MET
enumeration	3DG
enumeration	CR3
enumeration	3DGS
enumeration	ADC
enumeration	AADC
enumeration	MADC
enumeration	MAAD
enumeration	SCF
enumeration	PSCF
enumeration	NDC
enumeration	PNDC
enumeration	MNDC
enumeration	ASF
enumeration	OMX
enumeration	PADC

Copyright © 2016 USPS®. All Rights Reserved.

Tag	sortationLevelType
enumeration	MRDC
enumeration	SP
enumeration	MXDS
enumeration	MXDA
enumeration	WORKING
enumeration	SINGLEPIECE
enumeration	SURFACE
enumeration	AIR
enumeration	LOCAL

6.200 simpleType: serviceSubCodeType

Tag	serviceSubCodeType
Base	xs:string
enumeration	N = None or Not Bulk
enumeration	E = Electronic
enumeration	R = Retail or Registered
enumeration	T = Requested at Time of Mailing
enumeration	B = Bulk

6.201 simpleType: standardFlatTypeType

Tag	standardFlatTypeType
Base	xs:string
enumeration	Catalog
enumeration	NotCatalog

6.202 simpleType: stateCode

Tag	stateCode
Base	xs:string
enumeration	AA = Armed Forces Americas (except Canada)
enumeration	AE = Armed Forces Europe (covers all USARAEUR) Armed Forces Canada Armed Forces Middle East Armed Forces Africa
enumeration	AP = Armed Forces Pacific
enumeration	AL = ALABAMA
enumeration	AK = ALASKA
enumeration	AS = AMERICAN SAMOA
enumeration	AZ = ARIZONA
enumeration	AR = ARKANSAS
enumeration	CA = CALIFORNIA
enumeration	CO = COLORADO
enumeration	CT = CONNECTICUT
enumeration	DE = DELAWARE
enumeration	DC = DISTRICT OF COLUMBIA
enumeration	FM = FEDERATED STATES OF MICRONESIA
enumeration	FL = FLORIDA
enumeration	GA = GEORGIA
enumeration	GU = GUAM
enumeration	HI = HAWAII
enumeration	IL = ILLINOIS
enumeration	IN = INDIANA
enumeration	IA = IOWA

Copyright © 2016 USPS®. All Rights Reserved.

Tag	stateCode
enumeration	ID = IDAHO
enumeration	KS = KANSAS
enumeration	KY = KENTUCKY
enumeration	LA = LOUISIANA
enumeration	MH = MARSHALL ISLANDS
enumeration	MD = MARYLAND
enumeration	MA = MASSACHUSETTS
enumeration	MO = MISSOURI
enumeration	MI = MICHIGAN
enumeration	MN = MINNESOTA
enumeration	MS = MISSISSIPPI
enumeration	MT = MONTANA
enumeration	NE = NEBRASKA
enumeration	NH = NEW HAMPSHIRE
enumeration	NV = NEVADA
enumeration	NJ = NEW JERSEY
enumeration	NM = NEW MEXICO
enumeration	NY = NEW YORK
enumeration	NC = NORTH CAROLINA
enumeration	ND = NORTH DAKOTA= NORTH DAKOTA
enumeration	MP = NORTHERN MARIANA ISLANDS
enumeration	OH = OHIO
enumeration	OR = OREGON
enumeration	OK = OKLAHOMA
enumeration	PW = PALAU
enumeration	PA = PENNSYLVANIA
enumeration	PR = PUERTO RICO
enumeration	RI = RHODE ISLAND
enumeration	SC = SOUTH CAROLINA
enumeration	SD = SOUTH DAKOTA
enumeration	TN = TENNESSEE
enumeration	TX = TEXAS
enumeration	UT = UTAH
enumeration	VT = VERMONT
enumeration	VI = VIRGIN ISLANDS
enumeration	VA = VIRGINIA
enumeration	WA = WASHINGTON
enumeration	WV = WEST VIRGINIA
enumeration	WI = WISCONSIN
enumeration	WY = WYOMING

6.203 simpleType: statusType

Tag	statusType
Base	xs:string
enumeration	Accepted
enumeration	Amended
enumeration	Cancelled
enumeration	Counterproposal
enumeration	New
enumeration	NoAction
enumeration	Original
enumeration	PartiallyAccepted
enumeration	Pending
enumeration	Rejected

Copyright © 2016 USPS®. All Rights Reserved.

Tag	statusType
enumeration	Replaced

6.204 simpleType: stopDesignatorType

Tag	stopDesignatorType
Base	mailxml_base:s02

6.205 simpleType: surchargeType

Tag	surchargeType
Base	xs:string
enumeration	2 = Oversized Surcharge
enumeration	A = First-Class Mail Parcel Surcharge
enumeration	D = Dimensional Rate
enumeration	N = Not Oversized
enumeration	P = Balloon Surcharge
enumeration	E = Permit Reply Mail
enumeration	R = First-Class Mail Non-machinable Letters (0.0625 lbs or less)
enumeration	L = Detached Address Labels Used

6.206 simpleType: totalWeightType

Tag	totalWeightType
Base	mailxml_base:s05

6.207 simpleType: trailerLengthType

Tag	trailerLengthType
Base	xs:string
enumeration	20ft
enumeration	40ft
enumeration	45ft
enumeration	48ft
enumeration	53ft

6.208 simpleType: transportationMethodType

Tag	transportationMethodType
Base	xs:string
enumeration	USPS
enumeration	Mailer

6.209 simpleType: transportationModeType

Tag	transportationModeType
Base	xs:string
enumeration	0 = Reject Due to Error
enumeration	1 = Local and Working
enumeration	2 = Bypassed or Unassigned Surface or Air Mail
enumeration	3 = Assigned Surface (S-AMS Surface)
enumeration	4 = Assigned Air
enumeration	9 = Reject Due to Purge

6.210 simpleType: transShipBoLNumberType

Tag	transShipBoLNumberType
Base	mailxml_base:s05

Copyright © 2016 USPS®. All Rights Reserved.

6.211 simpleType: trayType

Tag	Mail.XML 14.0A
Base	xs:string
enumeration	MixedLengthTrays
enumeration	1ft Tray
enumeration	2ft Tray
enumeration	EMM Tray
enumeration	Flat Tub

6.212 simpleType: trayTypeIndicatorType

Tag	trayTypeIndicatorType
Base	xs:string
enumeration	F = 2 Foot Tray
enumeration	M = MM Tray
enumeration	E = EMM Tray
enumeration	H = 1 Foot Tray
enumeration	U = Unknown

6.213 simpleType: truckDispatchNumberType

Tag	truckDispatchNumberType
Base	mailxml_base:s10

6.214 simpleType: unitLoadType

Tag	unitLoadType
Base	xs:string
enumeration	CrossDockPallets
enumeration	WorkingPallets
enumeration	Trailers

6.215 simpleType: uOMType

Tag	uOMType
Base	xs:string
enumeration	AirDryMetricTonne
enumeration	AirDryPercent
enumeration	AirDryShortTon
enumeration	Bale
enumeration	BoardFoot
enumeration	BookUnit
enumeration	Box
enumeration	Bundle
enumeration	C-Size
enumeration	Centimeter
enumeration	Cord
enumeration	CubicFoot
enumeration	CubicMeter
enumeration	Cubit
enumeration	Day
enumeration	DotsPerInch
enumeration	Foot
enumeration	Gallon
enumeration	Gram
enumeration	GramsPerSquareMeter

Copyright © 2016 USPS®. All Rights Reserved.

Tag	uOMType
enumeration	Hour
enumeration	HundredBoardFeet
enumeration	HundredLinealFeet
enumeration	HundredPound
enumeration	HundredSquareFeet
enumeration	Inch
enumeration	Kilogram
enumeration	KilogramsPerDay
enumeration	KilogramsPerWeek
enumeration	KnownBreaks
enumeration	Layer
enumeration	Leaves
enumeration	LinearFoot
enumeration	LinesPerInch
enumeration	Load
enumeration	MagazineUnit
enumeration	Megabyte
enumeration	Meter
enumeration	MetricTon
enumeration	MetricTonsPerDay
enumeration	MetricTonsPerWeek
enumeration	Micron
enumeration	Millimeter
enumeration	Minute
enumeration	Month
enumeration	None
enumeration	Package
enumeration	Page
enumeration	PagesPerInch
enumeration	PalletUnit
enumeration	Percentage
enumeration	PerThousand
enumeration	Picas
enumeration	Piece
enumeration	PixelsPerInch
enumeration	Pound
enumeration	PoundsPerDay
enumeration	PoundsPerHour
enumeration	PoundsPerWeek
enumeration	PulpUnit
enumeration	Ream
enumeration	Reel
enumeration	Set
enumeration	Sheet
enumeration	ShortTon
enumeration	ShortTonsPerDay
enumeration	ShortTonsPerHour
enumeration	ShortTonsPerWeek
enumeration	Signature
enumeration	Skid
enumeration	SquareInch
enumeration	SquareFeet
enumeration	SquareMeter
enumeration	ThousandBoardFeet
enumeration	ThousandLinealFeet

Copyright © 2016 USPS®. All Rights Reserved.

Tag	uOMType
enumeration	ThousandPieces
enumeration	ThousandSquareCentimeters
enumeration	ThousandSquareFeet
enumeration	ThousandSquareInch
enumeration	Ton
enumeration	TonsPerHour
enumeration	Unit
enumeration	UnknownBreaks
enumeration	Week
enumeration	Yard

6.216 simpleType: uniqueContainerIDType

Tag	uniqueContainerIDType
Base	xs:string
maxLength	12
minLength	1
whiteSpace	preserve

6.217 simpleType: userInformationLine1Type

Tag	uniqueContainerIDType
Base	mailxml_base:s40

6.218 simpleType: userInformationLine2Type

Tag	userInformationLine2Type
Base	mailxml_base:s40

6.219 simpleType: userLicenseCodeType

Tag	userLicenseCodeType
Base	xs:string
maxLength	4
minLength	1
whiteSpace	preserve

6.220 simpleType: uspsPickupType

Tag	uspsPickupType
Base	xs:string
enumeration	Y = Yes
enumeration	N = No

6.221 simpleType: verificationLocationType

Tag	verificationLocationType
Base	xs:string
enumeration	BMEU = Business Mail Entry Unit
enumeration	DMU = Detached Mailing Unit

6.222 simpleType: wastedPieceIndicatorType

Tag	wastedPieceIndicatorType
Base	xs:string
enumeration	W = Wasted
enumeration	S = Shortage

Copyright © 2016 USPS®. All Rights Reserved.

Tag	wastedPieceIndicatorType
enumeration	X = Wasted piece and postage adjustment should NOT be triggered
enumeration	T = Shortage pieces not produced and postage adjustment should NOT be triggered

6.223 simpleType: weekFrequencyType

Tag	weekFrequencyType
Base	xs:string
enumeration	Weekly
enumeration	Bi-Weekly
enumeration	First
enumeration	Second
enumeration	Third
enumeration	Fourth
enumeration	Fifth
enumeration	Sixth

6.224 simpleType: weightBreakType

Tag	weightBreakType
Base	xs:string
enumeration	A = For standard Mail Non-Letters, Piece Weight is over 0.2063 lbs. For First-Class Mail Permit Reply, piece weight is over 0.0625 lbs.
enumeration	B = For USPS Marketable Mail, piece weight is 0.2063 lbs or less For First-Class Mail Permit Reply, piece weight is 0.0625 lbs or less.
enumeration	H = For USPS Marketable Mail Letters, piece weight is over 0.2063 lbs
enumeration	N = None

6.225 simpleType: yesNo

Tag	yesNo
Base	xs:string
enumeration	Yes
enumeration	No

6.226 simpleType: zipCodeThreeOrFiveDigit

Tag	zipCodeThreeOrFiveDigit
Base	xs:string
pattern	"[0-9]{3}|[0-9]{5}" - Space removed

6.227 simpleType: zoneICType

Tag	zoneICType
Base	xs:string
enumeration	N = None
enumeration	M = [Future Placeholder]
enumeration	LC = Local
enumeration	1 = Zone 1 & 2
enumeration	3 = Zone 3
enumeration	4 = Zone 4
enumeration	5 = Zone 5
enumeration	6 = Zone 6
enumeration	7 = Zone 7
enumeration	8 = Zone 8
enumeration	ICD = In County DDU
enumeration	IC = In County Other
enumeration	DDU = Out County DDU

Copyright © 2016 USPS®. All Rights Reserved.

Tag	zoneICType
enumeration	SCF = Out County DSCF
enumeration	ADC = Out County DADC

6.228 simpleType: onePassOrTwoPassType

Tag	onePassOrTwoPassType
Base	xs:string
enumeration	One
enumeration	Two

6.229 simpleType: USPSPriceIncentiveType

Tag	USPSPriceIncentiveType
Base	xs:string
enumeration	PostageAffixedReplyRidesFree
enumeration	Saturation-HDTotal
enumeration	Saturation-HDSCF
enumeration	Summer Sale

6.230 simpleType: ContentOfMailType

Tag	ContentOfMailType
Base	xs:string
enumeration	A
enumeration	B
enumeration	C
enumeration	E
enumeration	A1
enumeration	A2
enumeration	A3
enumeration	B1
enumeration	C1

6.231 simpleType: uspsPackageUniqueCharacteristicType

Tag	uspsPackageUniqueCharacteristicType
Base	Xs:string

6.232 simpleType: StandardFlatTypeType

Tag	StandardFlatTypeType
Base	xs:string
enumeration	Catalog
enumeration	NonCatalog

6.233 simpleType: MarketingOrFulfillmentType

Tag	MarketingOrFulfillmentType
Base	xs:string
enumeration	Marketing
enumeration	Fulfillment

6.234 simpleType: MLOCRRateType

Tag	MLOCRRateType
Base	xs:string
enumeration	R = Regular

Copyright © 2016 USPS®. All Rights Reserved.

Tag	MLOCRRateType
enumeration	N = Nonprofit

6.235 simpleType: closeoutResolutionType

Tag	closeoutResolutionType
Base	xs:string
enumeration	DCD = Driver Contracted Dispatch Office
enumeration	DCO = Destination Contacted Origin
enumeration	DRL = Driver Reconciled Load
enumeration	INR = Irregularities Could Not be Resolved on Dock

6.236 simpleType: valueAddedServiceType

Tag	valueAddedServiceType
Base	xs:string
enumeration	D1 = Appointment Value Added Service Option 1
enumeration	D2 = Appointment Value Added Service Option 2
enumeration	D3 = Appointment Value Added Service Option 3
enumeration	D4 = Appointment Value Added Service Option 4
enumeration	D5 = Appointment Value Added Service Option 5

6.237 simpleType: IMcbInfoType

Tag	IMcbInfoType
Base	xs:string
enumeration	Linked
enumeration	Scanned

Copyright © 2016 USPS®. All Rights Reserved.

7. Appendix C - WSDLs and XSDs

The WSDL specification is posted on RIBBS® and can be downloaded from the following location:
https://ribbs.usps.gov/intelligentmail_guides/documents/tech_guides/xmlspec/wsdls/wsdls.htm

The above RIBBS® URL provides WSDLs for both TEM and production environments. Users should always use this link to access the correct and updated version of WSDLs.

Copyright © 2016 USPS®. All Rights Reserved.

8. Change History Archive

FAST-14.0A-R32 Edition 1 Change 0:

Date	Section	Title	Description
11/13/2015	All	All	Updated Cover Page and footers
11/13/2015	1.8	Roadmap of Mail.XML	Added R32 and denoted retirement of Mail.XML 10.0
11/13/2015	4.4	Error Codes/Return Values	Updates for PRS and Parcel Select messages: modified 3550, 3552, 3566, 3568; deleted 3563, 3567, 3573, 3574.

FAST-14.0A-R31 Edition 3 Change 0:

Date	Section	Title	Description
6/5/2015	All	All	Updated Cover Page and footers
6/5/2015	1.8	Roadmap of Mail.XML	Changed April 2015 to May 2015

FAST-14.0A-R31 Edition 2 Change 0:

Date	Section	Title	Description
3/17/2015	All	All	Updated Cover Page, Table of Contents, Index, and footers
3/17/2015	1.8	Roadmap of Mail.XML	Added April 2015

FAST-14.0A-R30 Edition 1 Change 0:

Date	Section	Title	Description
10/30/2014	4.4	Error Codes/Return Values	Added description of Error Standardization effort
10/30/2014	All	All	Updated Cover Page, Table of Contents, Index, and footers
11/05/2014	1.8	Roadmap of Mail.XML	Added 16.0 detail

FAST-14.0A-R30 Edition 2 Change 0:

Date	Section	Title	Description
12/19/2014	4.4	Error Codes/Return Values	Added action messages to some error codes
12/19/2014	All	All	Updated Cover Page and footers
12/22/2014	All	Title Page and Footers	Changed to Version 3

FAST-14.0A-R30 Edition 3 Change 1:

Date	Section	Title	Description
12/23/2014	4.4	Error Codes/Return Values	Modified Action messages for Error codes 1011, 1018, and 3148
12/29/2014	4.4	Error Codes/Return Values	Added, corrected or changed this Change History for the following Error Codes: 1004, 1009, 1010, 1012, 1015, 1202, 3009, 3019, 3028, 3083, 3110, 3129, 4001, 4030

FAST-14.0A-R28 Edition 1 Change 0:

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section	Title	Description
1/13/2014	4.2.1	New Business Rules	Added business rules for Parcel Select mail class combinations
1/13/2014	4.2.1	New Business Rules	Added description for Carrier Name, CRID, Address, and Contact
1/13/2014	4.2.1	New Business Rules	Added description for Parcel Return Service Appointments
1/13/2014	4.2.2	Existing Business Rules	Moved previous new business rules into existing business rules section
1/13/2014	4.2.2	Existing Business Rules	Added description for FSS Scheme Pallets
1/13/2014	4.4	Error Codes/Return Values	Added error code for FSS Scheme Pallets
1/14/2014	All	All	Updated Table of Contents, Index, and footers

FAST-14.0A-R28 Edition 1 Change 1:

Date	Section	Title	Description
1/15/2014	All	All	Corrected FAST release number throughout document
1/15/2014	1.8	Roadmap of XML	Updated Roadmap for July 2014; corrected supported versions.
1/15/2014	2.3	PostalOne! – FAST Mail.XML Web Services Supported Messages	Corrected supported versions.
1/15/2014	4.2.1	New Business Rules	Clarified that CarrierType element is an existing structure within the specification

FAST-14.0A-R28 Edition 2 Change 0:

Date	Section	Title	Description
2/28/2014	2.4.12-13	FAST Workflows for Mail.XML	Added flows for Parcel Return Service appointment creating/updating
2/28/2014	3.1, 3.3	FAST Message and Data Structures	Updated message description and Comment field for Delivery Appt Shell Create/Update for Parcel Return Service appointments
2/28/2014	4.2.1	New Business Rules	Updated message types supporting Carrier information; updated Parcel Return Service description

FAST-14.0A-R28 Edition 2 Change 1:

Date	Section	Title	Description
2/21/2014	N/A	Index	Corrected index page numbers
2/21/2014	N/A	Release Version Support	Removed unnecessary releases
2/21/2014	1.8	Roadmap of Mail.XML	Removed unnecessary releases
2/21/2014	1.14	Environments Supported by USPS	Removed unnecessary date
2/21/2014	5.82	USPSDeliveryContentUpdatedNotificationMsgHeaderInfo	Corrected type name
2/21/2014	3.7, 3.9, 3.21, 3.24	DeliveryContentCreateRequest, DeliveryContentUpdateRequest, DeliveryApptCreateRequest, DeliveryApptUpdateRequest	Corrected verbiage

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section	Title	Description
2/21/2014	4.2.2	Existing Business Rules	Corrected font format

FAST-14.0A-R28 Edition 3 Change 0:

Date	Section	Title	Description
3/28/2014	4.2.1	New Business Rules	Added message types that will support the Parcel Select mail class
3/28/2014	4.2.1	New Business Rules	Removed mention of enhancement for error/warning codes (scope moved to October 2014)

FAST-14.0A-R16 Edition 3 Change 0:

Date	Section	Title	Description
10/31/2013	6.236	ValueAddedServiceType	Removed values D6 - D20.
10/31/2013	4.1.x	Additional Rules/Constraints	Replaced comment: 'return code/description combinations is populated' with 'ErrorWarning blocks with code/ error description combinations is populated' to show utilization of the new ErrorWarning type.
10/31/2013	4.2.1	New Business Rules	Removed comment: The FAST system shall utilize the Five Day Delivery (FDD) calendar API to retrieve whether or not Saturday is a delivery or non-delivery day from the Service Delivery Calculator (SDC) system.
10/31/2013	4.2.1	New Business Rules	Removed comment: FAST error/warning codes will be updated to include Error Code, Severity or Error Type, Error Description, Submission Date and Action.
10/31/2013	4.2.1	New Business Rules	Removed comment: The FAST system utilizes nationalized delivery days to determine In-Home / Service Standard validations.
10/31/2013	4.2.1	New Business Rules	Removed comment: The FAST system shall determine In-Home / Service Standard validations for standard mail class only.
10/31/2013	4.2.1	New Business Rules	Removed comment: All In-Home Date / Service Standard validations will always begin on the In-Home start date.
10/31/2013	4.2.1	New Business Rules	Removed comment: The FAST system shall not consider PO Boxes and other destination type values in the request to SDC.
10/31/2013	4.2.1	New Business Rules	Removed comment: The FAST system shall consider "Saturday" as non-deliverable for standard mail prior to the initial request for Saturday non-delivery days from the SDC system.
10/31/2013	4.2.1	New Business Rules	Removed comment: The Critical Entry Times (CET) are maintained separately from SDC.

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section	Title	Description
10/31/2013	4.2.1	New Business Rules	Removed comment: The Start-The-Clock (STC) indicator is maintained separately from SDC.
10/31/2013	4.2.1	New Business Rules	Removed comment: The STC indicator will always reflect a value of “N” for Saturday.
10/31/2013	4.2.1	New Business Rules	Removed comment: The language of the current error messages and validations shall be modified to accurately reflect the information derived from SDC.
10/31/2013	4.2.1	New Business Rules	Replaced comment: The FAST system shall only request the delivery status for “Saturdays.”
10/31/2013	4.2.1	New Business Rules	Removed comment: The FAST system shall utilize the existing NDC and SCF service standard values (Currently NDC = 5 days and SCF = 3 days for standard mail.)
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3533 Message: The mail preparer does not have a valid Negotiated Service Agreement for the selected service type.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3534 Message: This Mail.XML spec version is not supported for Value Added Service appointments.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3535 Message: Origin Entry content is not valid for Value Added Service appointments.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3536 Message: Actual piece count cannot be greater than <maxPieceCount>.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3537 Message: Bedload Counts are not allowed for Service Hubs.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3538 Message: ShipperMultiStopID <ShipperMultiStopID> is already in use by another Scheduler. Please use a different ShipperMultiStopID.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3539 Message: Only Pallet Appointments are allowed for Service Hubs.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3540 Message: Mail Shape must be Flats.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3542 Message: Rate Type must be BPM/Library/Media.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3546 Message: The service requested is not valid for Origin Entry.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3547 Message: The Facility must be a SCF and it must accept the requested service type.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3548 Message: Mail Class must be First-Class only.
10/31/2013	4.4	Error Codes/Return Values	Added Error: Code: 3549 Message: Web Services appointments/contents cannot be cancelled when within 1 hour of scheduled appointment time.
11/10/2013	4.2.1	New Business Rules	Added business rule “The FAST system shall support pallet type appointments for Service HUBs through Mail.XML 14.0A.”
11/10/2013	1.8	Roadmap of Mail.XML	Made update to Roadmap to correctly display Mail.XML version changes.
11/10/2013	Entire Document	Grammar Correction	Updated all occurrences of “refer” to “refer to”
11/10/2013	5.15	CancelCreateMsgHeaderInfo	Changed comment to “This flag indicates whether the content of the previous message should be transferred

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section	Title	Description
			for use in the new create message.”

FAST-14.0A-R16 Edition 2 Change 1:

Date	Section	Title	Description
8/22/13	5.12	basicReturnInfoType	Added ReturnCode and ReturnDescription
8/22/13	6.236	ValueAddedServiceType	Added values D3 - D20
8/22/13	Header, Footer	Entire Document	Updated to Edition 2 Change 1

FAST-14.0A-R15 Edition 1 Change 1:

Date	Section	Title	Description
7/17/13	4.2.1	New Business Rules	Added the comment: FAST will support AirBox as a container type.
7/15/13	4.2.1	New Business Rules	Added new section: New Business Rules
7/8/13	5.70	ReturnInfoType	Added ErrorWarning Type; Removed ReturnCode and ReturnDescription
7/8/13	5.84	USPSContainerInfoType	Added PostInductionStatus
7/5/13	5.16	CarrierType	Added CarrierCRID
7/3/13	5.75	StatusRequestByTimeMsgHeaderInfo	SchedulerID and CreatorSchedulerCRID changed to Optional. CR022
6/13/13	All	All	Created January 2014 document from Oct. 2013 document

FAST-14.0A-R15 Edition 2 Change 1: for review 06/10/2013

Date	Section	Title	Description
6/10/13	Footer	Entire Document	Updated to Change 1
6/10/13	4, 6	Additional Information, Appendix B	Updated format and punctuation (IT Feedback)
6/10/13	Header	Entire Document	Updated Header to proper version (IT Feedback)

FAST-14.0A-R15 Edition 2 Change 0: for review 06/10/2013

Date	Section	Title	Description
06/07/13	All	Entire Document	Removed Index Markers referring to Mail.xml versions 4.0, 6.0 and 8.0
05/24/13	All	Entire Document	Formatted to narrower margins and document renamed for improved version control

Mail.XML 14.0A FAST Version 1 R15 (October 2013)

Date	Section #	Title	Description
5/21/13	5.12	Complex Type: basicReturnInfoType	basicReturnInfoType has been updated
5/17/13	1.15	*PostalOne!* WSDL Information	Change message to FAST message
5/17/13	All	All	Updated per IT review
5/10/13	All	All	Created October document
5/10/13	All	All	Versions updated

Copyright © 2016 USPS®. All Rights Reserved.

These are the changes from Mail.XML 12.0B FAST Version 1.0 to Mail.XML 14.0A FAST Version 2.0

Date	Section #	Title	Description
3/20/13	Appendix C	WSDL	Updated WSDL information with RIBBS WSDL link
3/20/13	All	**8.1**	Updated grammatical and format errors.
3/7/13	9.197	**8.2 serviceCodeType**	Added CODE = Electronic Collect on Delivery, DCE = Delivery Confirmation Electronic, SCE = Signature Confirmation Electronic, DCD = Day Certain Delivery, CBM = Certificate of Bulk Mailing
3/7/13	9.131	**8.3 palletType**	Updated palletType to include Airbox
3/7/13	9.130	**8.4 palletHandlingUnitType**	Updated palletHandlingUnitType to include Airbox
3/7/13	8.83	**8.5 USPSContainerInfoType**	Updated IMcbInfoType to optional in the complex type USPSContainerInfoType
3/1/13	All	Header and Footer	Updated footer with correct version number and publication date

These are the changes from Mail.XML 12.0B FAST Version 7.0 to Mail.XML 14.0A FAST Version 1.0

Date	Section #	Title	Description
2/14/13	10	Remove	Removed WSDL Links for Mailing, Data Distribution and Identification
2/14/13	9.230	Remove	Removed original 9.230 (simpleType: USPSPriceIncentiveIDType)
2/14/13	9.12, 9.24, 9.25, 9.34, 9.65, 9.46, 9.45, 9.140, 9.227, 9.234	Edits	Added enumeration descriptions to sections
2/14/13	4.1	Remove	Removed text referring to String Type
2/13/13	7.1.15	Remove	Removed text referring to older versions not supported (6.0/8.0)
2/13/13	5	Edits	Adjusted formatting, all should be Arial 10 pt font
2/13/13	3.1	Edits	Changed second line to “Support for Mail.XML 14.0A with two asterisks (**) will begin in the July 2013 Release.”
2/5/13	Throughout		Changed section headers from “12.0B” to “14.0A”
2/5/13	All		Updated cover and footer
2/5/13	6.21	DeliveryApptCreateRequest	Added ValueAddedService
2/5/13	6.24	DeliveryApptUpdateRequest	Added ValueAddedService
2/5/13	6.30	DeliveryReApptRequest	Added ValueAddedService
2/5/13	6.1	DeliveryApptShellCreateRequest	Added ValueAddedService
2/5/13	6.3	DeliveryApptShellUpdateRequest	Added ValueAddedService
2/5/13	8.5	Complex Type: apptBlockGoodsType	Added ValueAddedService
2/5/13	8.6	Complex Type: apptBlockUnscheduledGoodsType	Added ValueAddedService
2/5/13	9.237	simpleType: valueAddedServiceType	Added valueAddedServiceType

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section #	Title	Description
2/5/13	9.238	simpleType: IMcbInfoType	Added IMcbInfoType
2/5/13	8.88	Complex Type: USPSContainerInfoType	Added IMcbInfo and PostInductionStatus

These are the changes from Mail.XML 12.0B FAST Version 5.0 to Mail.XML 12.0B FAST Version 7.0

Date	Section #	Title	Description
1/31/13	Throughout		Edits based on feedback
1/18/13	All		Updated cover and footer
1/18/13	All		Applied new formatting styles to document

These are the changes from Mail.XML 12.0B FAST Version 5.0 to Mail.XML 12.0B FAST Version 6.0

Date	Section #	Title	Description
11/27/12	All		Updated cover and footer
11/27/12	4.1/7.10	*PostalOne!* WSDL Information	Clarified that string-type no longer supported
11/27/12	6.31	PartnerApptQueryRequest	Updated formatting
11/27/12	7.6	Support Mailer SubmitterTrackingID	Clarified that SubmitterTrackingID is required

These are the changes from Mail.XML 12.0B FAST Version 4.1 to Mail.XML 12.0B FAST Version 5.0

Date	Section #	Title	Description
11/07/12	All		Updated cover and footer
11/07/12	7.3	Error Codes/Return Values	Updated Error Codes
11/07/12	7.4	Drop Entry Point Warning Codes and Descriptions	Updated Warning Codes

These are the changes from Mail.XML 12.0B FAST Version 4.0 to Mail.XML 12.0B FAST Version 4.1

Date	Section #	Title	Description
10/30/12	1.2	Mail.XML 12.0B	Removed entire section
10/30/12	2.3	USPS® Limitation Rule on Transaction Requests	Removed disclaimer text
10/30/12	3.1	Roadmap of Mail.XML	Updated description of table
10/30/12	3.4	About this document	Removed references to other versions of Mail.XML that are not 12.0B
10/30/12	4.1.1	Consuming String-Type WSDLs	Added: NOTE: Mail.XML no longer supports String-Type WSDLs
10/30/12	6	Mail.XML 12.0B	Removed note at beginning of section
10/30/12	9	Appendix B - Mail.XML 12.0B	Removed note at beginning of section. Removed references to old versions of Mail.XML
10/30/12	10	Appendix C - WSDLs and XSDs	Removed refines to String-type WSDLs Removed references to older versions of Mail.XML
10/30/12	7.4	Drop Entry Point Warning Codes and Descriptions	Removed references to Mail.XML 6.0 and 8.0B
10/30/12	2.1, 4.1, 7.10		Removed reference to 9.0X
10/30/12	7.10	Types of WSDLs	Added: NOTE: Mail.XML no longer supports String-Type

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section #	Title	Description
			WSDLs
10/30/12	5.2	Access to *PostalOne!* - FAST Web Services	Removed reference to previous Release
10/30/12	7.6	Support Mailer SubmitterTrackingID on MailXML 12.0B Messages	Updated references of 12.0A to 12.0B

These are the changes from Mail.XML 12.0B FAST Version 3.0 to Mail.XML 12.0B FAST Version 4.0

Date	Section #	Title	Description
9/26/12	2.3	USPS Limitation Rule on Transaction Requests	Clarified customer pull software query limitations
9/26/12	3.3	Intended Audience	Updated description
9/26/12	3.5	How to Read Data Structure	Updated description
9/26/12	6	Mail.XML 12.0A	Updated to reflect current versions supported
9/26/12	7.1.15	Partner Appointment Query Response	Formatting updates
9/26/12	7.3	Error Codes/Return Values	Updated IDEAlliance description
9/26/12	7	Additional Information	Formatting updates
9/26/12	9	Appendix B	Updated from 'Appendix A' to 'Appendix B' Formatting updates
9/26/12	10	Appendix C - WSDLs and XSDs	Formatting updates
9/26/12	3.1	Roadmap of Mail.XML	Updated Roadmap to reflect 8.0B decommission in April 2013 Added note for 6.0 decommission date
9/26/12	3.2	Purpose	Added clarification that users must log in to BCG to view drop ship and origin entry guides
9/26/12	7.3	Error Code/Return Value	Removed references to Mail.XML 6.0 Error Codes/Return Values Updated with 12.0A
9/26/12	7.4	Drop Entry Point Warning Codes and Descriptions	Removed references to Mail.XML 6.0/8.0 Updated with 12.0A
9/26/12	5.3	*PostalOne!* - FAST Mail.XML Web Services Supported Messages	Updated section to reflect latest versions of Mail.XML supported
9/26/12	6.19	DeliveryApptCancelCreateRequest	Updated description

These are the changes from Mail.XML 12.0B FAST Version 2.1 to Mail.XML 12.0B FAST Version 2.2

Date	Section #	Title	Description
8/15/12	All		Updated title page and footer
8/15/12	All		Updated SubmitterTrackingID to be required in all data structures
8/15/12	6.19	DeliveryApptCancelCreateRequest	Removed the statement about allowing the users to "transfer" the content of closed/no show/cancelled appointments to other appointments via DeliveryApptCancelCreate.
	3.1	Roadmap to Mail.XML	Added January 2013 to table

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section #	Title	Description
	All		Updated references of 12.X to 12.0A

These are the changes from Mail.XML 12.0B FAST Version 2.0 to Mail.XML 12.0B FAST Version 2.1

Date	Section #	Title	Description
7/30/12	All		Updated title page and footer for July 30 publication.

These are the changes from Mail.XML 12.0B FAST Version 1.11 to Mail.XML 12.0B FAST Version 2.0

Date	Section #	Title	Description
7/5/12	All		Updated title page and footer for July 6 publication.
7/5/12	All		Corrected grammatical and misspelling errors throughout the document.
7/5/12	4.1.1 4.1.2	Consuming String-Type WSDLS Consuming Message-Type WSDLS	Updated number format from 4.1.1.1 and 4.1.1.2 to 4.1.1 and 4.1.2, respectively.

These are the changes from Mail.XML 12.0B FAST Version 1.10 to Mail.XML 12.0B FAST Version 1.11

Date	Section #	Title	Description
6/12/12	All		Updated formatting and grammar throughout document
6/12/12	All		Added DRAFT watermark, update title page, updated footers, updated version number, updated date changed.
6/12/12	All		Corrected grammatical and misspelling errors throughout the document.
6/12/12	6.40	StaleContentQueryRequest	Removed the extra dots at the end of the sentences
6/12/12	6.34	AllDeliveryApptCloseoutRequest	Corrected the phrase "to handle large amount of closeout data" to be "to handle large amount(s) of closeout data"
6/12/12	All		Replaced all references to *PostalOne!* to be *PostalOne!*
6/12/12	1.1	Program Overview	Updated the weblinks to the technical specifications on RIBBS
6/12/12	All		Corrected spelling error of eIndcution to eInduction

These are the changes from Mail.XML 12.0B FAST Version 1.9 to Mail.XML 12.0B FAST Version 1.10

Date	Section #	Title	Description
5/16/12	All		Removed watermark and updated the document cover and footer for May 18 Initial Publication for RIBBS for October 2012 Release.
5/16/12	6.19	DeliveryApptCancelCreateRequest	Added the following description: FAST shall allow

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section #	Title	Description
			mailers/users to add content to a new appointment without the user having to recreate the content in FAST. For closed/no show/cancelled the Content ID is not transferred, but the content details/elements are copied over to the new appointment and given a new Content ID.

These are the changes from Mail.XML 12.0B FAST Version 1.8 to Mail.XML 12.0B FAST Version 1.9

Date	Section #	Title	Description
5/4/12	All		Updated cover and version numbering for October 2012 release
5/4/12	9.14, 9.25, 9.26, 9.31, 9.36, 9.45, 9.47, 9.48, 9.49, 9.59, 9.61, 9.62, 9.63, 9.64, 9.69, 9.77, 9.81,9.83, 9.106, 9.108, 9.117, 9.120, 9.127, 9.132, 9.139, 9.143, 9.148, 9.151, 9.163, 9.173, 9.179, 9.180, 9.187, 9.213, 9.221, 9.223, 9.232, 9.252	bundleLevelType, componentIDType, componentWeightType, container24CharacterBarcodeType, containerGroupingDescriptionType, containerType, cptPeriodicalAdPercentageType, cptPeriodicalAdPercentageBasisType, cptPeriodicalAdPercentageBasisType, daysType, dec03-2, dec04-3, dec18-6, dec10-4, eMD8125ASNBarcodeType, es2, es31, fASTContentIDType, inOutCountyIndicatorType, int04 , maildatRecordStatus, mailIssueType, mailXMLStatusType, moveUpdateType, ns08, ns13, n04, newAddressType, periodicalStatementType, postageStatementStateType, pvdsContainerType, pvdsContainerSubType, recipientType, s31, s72, s255, segmentIDType, unloadStateType	Removed simple types indicated from section 9

These are the changes from Mail.XML 12.0B FAST Version 1.7 to Mail.XML 12.0B FAST Version 1.8

Date	Section #	Title	Description
5/4/12	All		Updated title page, footer, and version number for October 2012 release

These are the changes from Mail.XML 12.0A FAST Version 1.6 to Mail.XML 12.0B FAST Version 1.7

Date	Section #	Title	Description
04/25/12	All		Updated title page, footer, and version number for October 2012 release
04/25/12	8.22	consigneeFacilityType	Added additional required FacilityAddress element
04/25/12	9.122	mailXMLPresentationCategoryType	Added enumeration value “C = Consolidated Internal Copal job with linked logical and presort mailings”
04/25/12	9.185	rateType	Specified enumeration M = Regional Ground
04/25/12	3.1	Roadmap of Mail.XML	Added column to table for October 2012 release
04/25/12	6.21, 6.24, 6.7, 6.9	DeliveryApptCreateRequest, DeliveryApptUpdateRequest, DeliveryContentCreateRequest, DeliveryContentUpdateRequest	Added a business rule note: Please be aware that mailers must create eInduction contents separate from non eInduction contents, else every barcode (IMcb) pallet identified under an eInduction content will be marked for

Copyright © 2016 USPS®. All Rights Reserved.

Date	Section #	Title	Description
			eInduction processing and will be expected to have eDocs and unique IMcbs.

These are the changes from Mail.XML 12.0A FAST Version 1.5 to Mail.XML 12.0A FAST Version 1.6

Date	Section #	Title	Description
04/09/12	All		Updated cover and version numbering for April 10 Final Publication for RIBBS
04/09/12	All		Removed the DRAFT watermark seal

These are the changes from Mail.XML 12.0A FAST Version 1.4 to Mail.XML 12.0A FAST Version 1.5

Dates	Section #	Title	Description
3/27/2012	3.1	Roadmap of Mail.XML	Updated Mail.XML 6.0 retirement date to April 1, 2012

These are the changes from Mail.XML 12.0A FAST Version 1.3 to Mail.XML 12.0A FAST Version 1.4

Dates	Section #	Title	Description
3/13/12	All		Updated title page, header, and footer
3/13/12	6.34, 6.35, 6.38, 6.28, 6.29, 6.19, 6.20, 6.21, 6.22, 6.26, 6.27, 6.24, 6.25, 6.1, 6.2, 6.3, 6.4, 6.7, 6.8, 6.11, 6.12, 6.9, 6.10, 6.31, 6.32, 6.48, 6.49, 6.15, 6.16, 6.40, 6.41, 6.44, 6.45		Added optional SubmitterTrackingID string 20 element to multiple request/response messages
03/14/12	12.3	USPS® Limitation Rule on Transaction Requests	Added a disclaimer to inform users/mailers the statement and limitation in this section are under review by the USPS. Updates for this section will be provided in the next Mail.XML technical specification publication.

These are the changes from Mail.XML 12.0A FAST Version 1.2 to Mail.XML 12.0A FAST Version 1.3

Dates	Section #	Title	Description
3/13/12	All		Updated title page, header, and footer

These are the changes from Mail.XML 12.0A FAST Version 1.1.4 to Mail.XML 12.0A FAST Version 1.2

Dates	Section #	Title	Description
3/1/12	7.6	Support Mailer SubmitterTrackingID on MailXML 12.0A Messages	Added entire section 7.6 Support Mailer SubmitterTrackingID on MailXML 12.0A Messages
3/1/12			Added updated table after title page. Technical Support from the USPS Help Desk and Tier 2 Support:
3/1/12	7.5	Fault Codes	Added 501
3/1/12	7.3	Error Codes/Return Values	Added 1510
3/1/12	6.2, 6.4, 6.8, 6.12, 6.14, 6.16,		Updated TrackingID element from ‘String 12’ to

Copyright © 2016 USPS®. All Rights Reserved.

Dates	Section #	Title	Description
	6.20, 6.22, 6.25, 6.27, 6.29, 6.32, 6.35, 6.39, 6.41, 6.45, 6.49, 8.59		'String 20'

These are the changes from Mail.XML 12.0A FAST Version 1.1.1 to Mail.XML 12.0A FAST Version 1.1.4

Dates	Section #	Title	Description
12/22/11	All		Updated header/footer & title page
2/20/12	8.9	Complex Type: apptInfoType	Created Complex Type: apptInfoType
2/20/12	9.46	containerstatustype	Removed 9.46 containerstatustype
2/20/12	9.260	verificationReportType	Removed 9.260 verificationReportType
2/20/12	8.74	SubmittingParty/ participantIDType	8.74 updated from 'SubmittingParty/ participantIDType' to 'participantIDType'
2/21/12	8.67	ResponseMsgHeaderInfo	Added IncludeElectronicLoad to 5.60 Attribute Type: ResponseMsgHeaderInfo

These are the changes from Mail.XML 12.0A FAST Version 1.1.0 to Mail.XML 12.0A FAST Version 1.1.1

Dates	Section #	Title	Description
1/6/12	1.6	USPS® Limitation Rule on Transaction Requests	Edited the text of this section for clarity
1/6/12	1.7	Roadmap of Mail.XML	Updated the Mail.XML Supported Versions in FAST from Release 18 to 21
1/6/12	3.4	About this Document	Revised the narratives to clearly describe the purpose and format of data structure tables; corrected the reference to Appendix E to B
1/6/12	All		Changed text From "Refer to this simple type in Appendix E" to "Refer to this simple type in Appendix B" throughout the document to correct references to Simple Types
1/6/12	All		Changed text from "Refer to this complex type in Appendix B" to "Refer to this simple type in Appendix A" throughout the document to correct references to Complex Types
1/6/12	All		Changed text from "Refer to this attribute in Appendix B" to "Refer to this attribute in Appendix A" throughout the document to correct references to Attribute Groups
1/6/12	1.10	About This Document	Updated references to Appendices, Mail.XML versions and overview of the sections

These are the changes from Mail.XML 12.0A FAST version 1.1.1 posted on RIBBS (December 23, 2011) to Mail.XML 12.0A FAST Version 1.1.2. (Note: The final Mail.XML version will be confirmed by the USPS after design is completed).

Dates	Section #	Title	Description
01/3/12	All		Update Footer and Cover page with correct version number and revision date Added USPS Foreword on 2nd page to describe scope of Change request (CRs) included for Jan 9, 2012 publication
12/28/11	5.60	Attribute Type: ResponseApptUpdateMsgHeaderInfo	Added new optional yesNo attribute IncludesElectronicLoad to ResponseApptUpdateMsgHeaderInfo

Copyright © 2016 USPS®. All Rights Reserved.

Dates	Section #	Title	Description
12/28/11	5.58	Attribute Type: RequestMsgHeaderInfo	Added new optional yesNo attribute IncludesElectronicLoad to RequestMsgHeaderInfo
12/28/11	5.48	Attribute Type: PickupRequestHeaderInfo	Added new optional yesNo attribute IncludesElectronicLoad to PickupRequestHeaderInfo
12/26/11	All	Header & Footer	Updated header and footer

These are the changes from RIBBS Mail.XML 12.0A Version 1.1.0 to Mail.XML 12.0A Version 1.1.1. (Note: The final Mail.XML version will be confirmed by the USPS after design is completed).

Dates	Section #	Title	Description
12/22/11	3.3.1	PartnerApptQueryRequest	Added new business rules available in April 2012. ConsigneeApptID not required, and one week date range can be used to query.
12/22/11	All		Changed 12.0 to 12.0A throughout document
12/16/11	6	Mail.XML 12.0B – Simple Type Data Structures	Replaced all simple type and headers from Mail.XML 10.0 to Mail.XML 12.0B
12/16/11	5	Appendix A – Mail.XML 12.0B FAST Complex Types	Replaced all complex type and headers from Mail.XML 10.0 to Mail.XML 12.0B
12/16/11	3	Mail.XML 12.0B – FAST Message and Data Structures	Replaced all message and headers from Mail.XML 10.0 to Mail.XML 12.0B
12/16/11	1.7	Roadmap of Mail.XML	Added column for Release 20.0 and 21.0, and their respective Mail.XML supported versions Updated table of supported messages with a new column for Mail.XML 12.0B
12/13/11	All	Footer and Header	Updated throughout document, including footer and header, to reflect Mail.XML 12.0B

These are the changes from RIBBS Mail.XML 12.0A version 1.0.0 (Sept 30, 2011) to Version 1.1.0

Dates	Section #	Title	Description
11/10/11	1.7	Roadmap of Mail.XML	Updated the note Changed the decommissioning date of Mail.XML 6.0D from December 30th, 2011 to January 8th, 2012. Included Mail.XML Release 28 and 29 in the table.
11/07/11	All	Footer and Header	Updated footer and header

These are the changes from RIBBS Version 9.5.3 (Aug 9, 2011).

These changes are being implemented to contribute to the goal of editing of the Postal Service Mail.XML technical specification by function (eDoc, Data Distribution, FAST), which are themselves further divided by Mail.XML versions ie.9.0C,12.0B,11.0 supported in a release.

These changes are being implemented to contribute to the goal of breaking down and editing the Postal Service Mail.XML technical specifications by Mail.XML supported versions to facilitate editing and enhance readability and navigation throughout the document.

In addition, to easier navigation, some sections such as the appendixes have been reorganized.

Previously the technical specifications were just divided by function (eDoc, Data Distribution, FAST). In that scheme, all supported Mail.XML for each release were all combined in one technical specification per function release. i.e. For Release 28 (November 2011) the Mail.XML eDoc technical specification included the supported Mail.XML versions 9.0B, 9.0C and 12.0BC, as while the FAST technical specification containing Mail.XML 8.0B and 12.0B versions.

Copyright © 2016 USPS®. All Rights Reserved.

This approach resulted sometimes in bulky document that became difficult to edit, manage or read as with documents mounting up to sometimes 1000 pages.

With the new editing process, the technical guides are edited focusing on the Mail.XML supported version per function.

For instance, the FAST guide supporting Mail.XML 8.0B and 12.0B versions will have two different sub-Technical specifications for Release 29 (January 2012).

Each technical specification will also group all Mail.XML version and their respective supported errata versions.

For instance, 9.0B and 9.0C supported in eDoc technical specification for Release 28 are combined in one document since they are errata for Mail.XML 9.0. However if Mail.XML 8.0B and 8.1 were supported, they would have been in two different documents since they are not of the same Mail.XML version.

By convention, Mail.XML version name containing a letter, such as 7.0C, 9.0B, 12.0BA are considered errata. In contrast, Mail.XML 8.0 and 8.1 are considered to be two different versions.

The following are the changes from Version 9.5.3 to Version 1.0.0

The version number of the document is being reset to 1.0.0 instead of following the 9.5.3 series because of the new editing approach explained above.

Note that the contents of the business rules and data structures do not change from Version 9.5.3 to Version 1.0.0 in this document. Only the format and organization of the document are modified to facilitate editing for the editors and readability for the readers.

Dates	Section #	Title	Description
09/29/11	4.3.1	Updated Error and Warning messages	Inserted a new table for Updated Error and Warning messages
09/29/11	3.34	AllDeliveryApptCloseoutRequest	Update: Mailxml10 ‘AllDeliveryApptCloseoutRequest ’ with Date Range (Start,End) provided on the request will match date range provided with ‘ScheduledAppt ’ to retrieve ‘ConsigneeGoodsReceipt ’, and ‘ActualTruckArrival ’ to retrieve ‘UnscheduledConsigneeGoodsReceipt ’ . If the Start and End date parameters are not provided, the system will provide all of the available and unrequested data
09/29/11	1.7	Roadmap of Mail.XML	Changed the decommissioning date of Mail.XML 6.0D from October 28, 2011 to December 30, 2011.
09/26/11		Document Change History	Added the changes history from the previous versions to have a complete history log of the guide updates.
09/26/11		Document Change History	Added “NOTE: Below are the document updates before the split into one Mail.XML major version per technical specification.” to the history log
09/01/11		Document Change History	Added a new column “Date” to the table of Change History to record the dates of implemented changes.
08/31/11	3.0	Mail.XML 12.0B - FAST Message and Data Structures	Added new headers to the tables of Mail.XML 12.0B FAST message data structures
08/31/11	5.0	Appendix A	Added new headers to the tables of Complex and Attribute Data Types Data Structure for

Copyright © 2016 USPS®. All Rights Reserved.

Dates	Section #	Title	Description
			Mail.XML 12.0B
08/25/11	Title and Header		Updated Title and Header to include Mail.XML 12.0B
08/25/11	Footer		Updated Footer with current version 1.0.0 and date

NOTE: Below are the document updates before the split into one Mail.XML major version per technical specification.

The following are the changes from Version 9.5.2 to Version 9.5.3

Section #	Title	Description
Title and Header		Updated Title and Header to include January 2012 Release
Footer		Updated Footer with current date 8/09/2011
All	Mail.XML Data Structure for 7.0C messages	Remove all references to Mail.XML 6.0D
All	Mail.XML Data Structure for 6.0D messages	Removed the note stating that this section will be removed from this guide at its next update schedule.

The following are the changes from Version 9.5.1 to Version 9.5.2

Section #	Title	Description
All	Mail.XML Data Structure for 6.0D messages	Removed the note stating that this section will be removed from this guide at its next update schedule.
All	All	Changed the reference across this document from 9.1 to 12.0B since FAST shall be supporting 12.0B and not the 9.X version
Section 3	Mail.XML Data Structure for 6.0D messages	Added a note to clearly state that this section will be removed from this guide at its next update schedule.
All	All	1. Updated the data structure of existing Mail.XML 10 version section to Mail.XML 10A version 2. Updated the complex type associated with the Mail.XML 10A messages 3. Updated the complete Simple Type table in Appendix B
All	All	4. Updated rules, language and grammar
All	Heading formatting	Heading formatting throughout the document for better readability and clear organization
Section 1.5	Roadmap of Mail.XML	Removed the column for Mail.XML 6.0D messages

Following are the changes from Version 9.4 to Version 9.5.1

Section #	Title	Description
1.1	Program Overview	1. Added a detailed section on the scope of Mail.XML 9.1/12.0B and explained the new XSD hierarchy that is being introduced from Mail.XML 9.X version. 2. Re-arrange the section to clearly outline the change history for Mail.XML 8.1 version
1.2	About Schema Modularization	Added a new section to describe the new XSD hierarchy and individual modules.

Copyright © 2016 USPS®. All Rights Reserved.

Section #	Title	Description
		Explained each module briefly to help reader understand each module.
1.3	What Schema's Cover FAST functionality?	Added a new section to help reader clearly understand the modules that constitutes FAST functionalities.
1.4	USPS® Limitation Rule on Transaction Requests	Added a new section to clearly outline the USPS limitations for users of FAST functionalities on the number of requests that they should attempt in a day.
1.5	Roadmap of Mail.XML	Updated the roadmap table to reflect the correct versions that are being supported today and will be supported in January 2011 and Summer or Fall of 2011. Also updated the table that lists all messages organized by versions to reflect the new messages that will be added and supported in Mail.XML 9.1/12.0B version.
1.8	About This Document	Added a clarification note stating that simple type included in Appendix B is same across all Mail.XML technical specifications.
1.11	Environments Supported by USPS	Added section on TEM and Production environments and briefly explained each environment.
1.12	*PostalOne!* WSDL Information	Re-written the section clearly explain the different types of WSDLs that user can use to consume the WSDLs such as "String-Type WSDL" and "Message-Type WSDL"
2.1	Overview (FAST)	Added a brief description on when Mail.XML 9.1/12.0B for FAST will be supported.
2.3	*PostalOne!* FAST Mail.XML Web Services Supported Messages	Added a description explaining the workflow of FAST messages in all supported versions.
2.4	FAST Workflow for Mail.XML	Properly arrange the section to clearly show the workflow of FAST messages.
3.0	Mail.XML 6.0D – FAST Messages and Data Structure	Formatted the section to follow format used throughout the document.
5.0	Mail.XML 9.1/12.0B – FAST Messages and Data Structure	Added a new section that lists all Mail.XML messages supported in FAST with details on every message such as business rules and data structure
Appendix A	WSDLs and XSDs	Added new links/url for the Mail.XML 9.1 and future versions.
Appendix A	Mail.XML 9.1/12.0B – FAST Complex types Data Structures	Added a new appendix listing all the complex types and attributes blocks used by FAST messages with details such as Business rules and data structure.
Appendix B	Simple Types Data Structure	Updated this section with all new and modified simple types.

Following are the changes from Version 9.3 to Version 9.4

Section #	Title	Description
6.1	Closeout Data	Added a section to provide the current workflow of how closeout data is disseminated to MailOwner and MailPreparer

Following are the changes from Version 9.2 to Version 9.3

Section #	Title	Description
Document	Throughout	Fixed the formatting; language; and spellings throughout the document.
Document	Throughout	The word '*PostalOne!*' was replaced with '*PostalOne!*'

Copyright © 2016 USPS®. All Rights Reserved.

Section #	Title	Description
		throughout the document.
1.1	Mail.XML 8.0	Fixed typo, corrected Mail.XML to Mail.XML
1.9	All	Added more details to explain the usage of the MailPreparerID field for Standalone content and distribution of closeout data.
4.8	Mail.XML 8.0 B Specific Business Rules	Statement/Item/Bullet 6. Rephrased parts of the statement. Added the closeout blocks that contain closeout information.

Following are the changes from Version 9.1 to Version 9.2

Section #	Title	Description
Appendix A	WSDLs and XSDs	Added the URL to access the Mail.XML 8.1 WSDLs and XSDs in TEM and Production environment.

Following are the changes from Version 9.0 to Version 9.1

Section #	Title	Description
All	All	Clearly stated that FAST will support only 6.0D and 8.0B versions of Mail.XML in November 2010 release.
1.6	How To Read Data Structure	Added clarity for the reader to understand what the difference is between Required, Optional, and Conditionally required elements. In addition, clarified scenarios where a block within the message is REQUIRED but all elements within the block are OPTIONAL and vice versa.
1.8	Exceptions	Added Exceptions for 8.0B for CSA pallets and for recurring appointments. Deleted Exception about UTF-8 BOM issue which is fixed in May 2010
4.0	Mail.XML 8.0B – FAST Messages and Data Structures	Added ability to query for Drop Ship and Origin Entry recurring appointment by status.
4.1.1	Appointment Closeout Messages	Added SchedulerCRID and CreatorSchedulerCRID.
4.1.3	ConsigneeGoodsReceipt	Removed RecurringAppt and ConsigneeFacility.
4.4.4	DeliveryApptQueryRequest	Added SubmittingParty and SubmittingSoftware.
4.4.5	DeliveryApptCancelCreateRequest	Switched the order of SchedulerID and SchedulerCorpID.
4.4.8	DeliveryApptCancelResponse	Removed CancelConfirmID.
4.4.10	DeliveryApptCancelCreateResponse	Removed CancelConfirmID.
4.5.8	DeliveryContentQueryResponse	Removed ShipperStopNumber.
6.1	Additional Rules/Constraints	Changed description for Container Level AE, AF, and AG. Also, added rules for PartnerApptQueryResponse and DeliveryContentQueryResponse
6.3	Error Codes/Return Values	Added messages 3081, 3100, 3135, and 3158 through 3161.

Following are the changes from Version 8.6 to Version 8.7

Section #	Title	Description
All	All	Fixed spelling and grammar mistakes.
5.0	Mail.XML 8.0B Specifications (Full-Service Release 3 FAST Messages)	Added new fields to message layouts and added a list of supported capabilities of FAST in Mail.XML 8.0 Version for March Release.
6.3	Error Codes/Return Values	Added return codes 3145, 3146, 3147, 3148, 3149, 3150, and

Copyright © 2016 USPS®. All Rights Reserved.

Section #	Title	Description
		3151.
6.4	Drop Entry Point Warning Codes and Descriptions	Added additional warning codes 4028 and 4029. Updated text and explanation of warning codes 4018 and 4020.
Appendix D	Appendix D for Complex Types Data Structure for Mail.XML 8.0 Specification for FAST Messages	Added Appendix D for Complex Types Data Structure for Mail.XML 8.0 Specification for FAST Messages with message descriptions in alphabetical order
Appendix B	Simple Types Data Structure	Rename Appendix D to Appendix B. Updated content header format to body text format.

Following are the changes from Version 8.9 to Version 9.0

Section #	Title	Description
All	All	Performed spell check and grammar correction
All	All	Removed Messages, data structures, and business rules associated with Mail.XML 4.0 for FAST
1.8	Exception	Added the following exception: An issue has been identified in the processing of appointment contents for logical mailings. If only Mail.dat summary block is provided in the Mail.XML, appt create messages, then due to a specification limitation *PostalOne!* may not send accurate data to the FAST system. Logical mailers must send the USPSSummary block until the Mail.XML 9.0 specification is updated and implemented by PO/FAST.
1.8	Exception	Added the following exception: An issue with processing of UTF-8 BOM (Byte Order Mark) character has been identified. At this time *PostalOne!*/FAST does not support UTF-8 BOM characters and this feature will be supported in a future release.

Following are the changes from Version 8.8 to Version 8.9

Section #	Title	Description
All	All	Update references of Mail.XML 8.0 to Mail.XML 8.0B, SchedulerID and SchedulerCorp ID are optional fields for FAST messages in Mail.XML 8.0B Added comment that 4.0 support is going away in summer 2010
All	All	Corrected the messages in this Specs to match with the names used in the Mail.XML XSD
1.1, 1.3, 1.5,	Intro, purpose, Mail.XML 8.0B	Updated the sections for 8.0B and to make them FAST specific
1.8	Exceptions	- Grammar corrections made for the row with title 8.0B - Added Consignee Appointment ID alongside Appointment ID
1.6	Issue Resolution	Added new section that provides a link for readers to get most updated list of issues and work-arounds from the RIBBS® website. Added current examples of issues.
1.8	Exception	Added 8.0D MaildatCode exception and modified the 6.0D presort code exception
2	FAST Workflow for Mail.XML	Section reviewed and message names updated to reflect new message names, primarily replaced the words “Appointment” with “Appt”
2.3	*PostalOne!* - FAST Mail.XML Web Services	Removed the first paragraph, as it was the information provided in the second paragraph covered the information in the first one.

Copyright © 2016 USPS®. All Rights Reserved.

	Supported Messages	
2.4	DeliveryContent Message name	Updated messages name from DeliveryAppointmentContent to DeliveryContent. Added information support for DeliveryContent messages for Transporters. Added the Mail.dat recurring update scenario just for Mail.dat updates
4.4	Delivery Appointment Messages	Grammatical updates made to make the list more consistent,
5.1	Update attribute name	AllAppointmentCloseoutResponse changed to AllApptCloseoutResponse, AllDeliveryAppointmentCloseoutResponse changed to AllDeliveryApptCloseoutResponse, RequestMessageHeaderInfo to RequestMsgHeaderInfo, Changed CreatorSchedulerCorpID to optional
5.4	Delivery Appointment Messages	Grammatical updates made to make the list more consistent.
5.8	Mail.XML 8.0B Specific Business Rules	Added the Mail.dat transportation updates clarification for the recurring appointment for Full-Service compliance.
6.1	Additional Rules/Constraints	Updated rules for the when errors are returned as part of the Delivery Appointment Query message. Added logic for returning a ReturnInfoBlock with IMCB warnings Noted which functionality is for only certain Mail.XML specifications. Updated rules for multiple Mail.XML specifications to include Mail.XML 8.0B. Added details of the interaction between Web Services and the online application Added the description of two new files i.e. BMEU and CET file that is available for download from fast.usps.com -> Resources -> Drop Ship Product Download section. The BMEU file can be used to identify the Locale Key of the Plant and CET file can be used to determine the Critical Entry Time of the Plant by which the mail must arrive for induction
6.10	Closeout Messaging for Mail Owner and Mail Preparers	Added details of Mail Owner and Mail Preparer support for Closeout messages
6.12	Authentication	Updated authentication details as of March 2010 to include what portions *PostalOne!* will continue to perform and what portions FAST will take over
Appendix B	Simple Type	Added the English translation for the simple type codes/enumerations
INDEX	INDEX	Index added at the end of the document

Following are the changes from Version 8.7 to Version 8.8

Section #	Title	Description
6.8	*PostalOne!* WSDL Information	Added the definition for String-type and Message-type WSDLs
Appendix A	WSDL and XSD	Added the URL's for accessing the different WSDLs for TEM and production environments.

Following are the changes from Version 8.5 to Version 8.6

Section #	Title	Description
All	All	Renamed the references of Mail.XML 7.0C to Mail.XML 8.0B throughout the document
All	All	Updated the element names with the actual simple type names
All	All	Fixed spelling and grammar mistakes.
1.2	Roadmap of Mail.XML	Added new section to outline the Mail.XML versions supported in Pre/

Copyright © 2016 USPS®. All Rights Reserved.

Section #	Title	Description
		Post November Release and March 2010 release.
1.3	Document Scope	Added the clarification in the 'Document Scope' section to clearly outline the content of the FAST specification
1.5	About This Document	Added clarification note to explain the Appendix D (Simple Types Data Structure) and also identify the exception that Appendix D does not contain simple types for Mail.XML 4.0 version
1.7	Exceptions	Added an exception that when customer is providing USPSSummary block data for FAST appointment/content management – it is recommended that they also provide maildatsummary block data when available even though maildatsummary block is not required. This data will be useful for future eInduction application support. Another exception is that if the customer is submitter than they will not get the closeout data. Closeout data is provided to Mail Owner, Mail Preparer, and Scheduler only Another exception is that for entity creating Stand-alone content, the entity shall provide their own SchedulerID or CRID to the FAST system in the MailPreparerID field of ContentUSPSSummaryType block in DeliveryContentCreateRequest and DeliveryContentUpdateRequest Messages
6.3	Error/Return Codes	Corrected one Error/Return code from '3014' to '314'
6.8	*PostalOne!* WSDL Information	Added a note to state that Mail.XML 8.0 WSDLs will be available later.
5.1	*Business rules for 8.0B*	Added this new section to identify new business rules for the Mail.XML 8.0B March 2010 implementation.
Appendix A	WSDL	Added a note that Mail.XML 8.0 WSDLs will be available later
Appendix D	Simple Types Data Structure	Added new appendix to show the simple types data structure

Following are the changes from Version 8.4 to Version 8.5

Section #	Title	Description
All	All	Renamed the references of Mail.XML 7.0B to Mail.XML 7.0C throughout in the document
All	All	Specified the acceptable format for 'date' and 'datetime' data type as 'YYYY-MM-DD' and 'YYYY-MM-DDTHH:MM:SS' respectively
All	All	Globally renamed 'Mail.XML' to 'Mail.XML'
All	All	Italicized the word '*PostalOne!*' throughout the document
All	All	Corrected spelling and grammar mistakes
1.3	Intended Audience	Added a new section 'Intended Audience'
1.4	About This Document	Added new section 'About This Document'
4.0	Mail.XML 6.0D Specifications	Added a list of supported capabilities of FAST in Mail.XML 6.0D Version for November Release. With November 15th release of Full-Service Release 2, the following additional capabilities are available in FAST for customer transported origin entry appointments (First-Class Mail, Standard Mail, Periodicals, and Package Services) in Mail.XML 6.0D. • Joint Scheduling • The ability to create and manage appointments at 10 minute intervals for one-time and recurring appointments • The ability to provide the Intelligent Mail Container Barcode (IMCB) up to 5 days past the appointment date/time using the DeliveryContentUpdateRequest
4.4	Multiple	Added and clarified existing business rules.

Copyright © 2016 USPS®. All Rights Reserved.

Section #	Title	Description
4.4.1 4.4.2 4.4.3 4.4.4 4.5 4.5.2 6.1		• 4.4: The ability to create appointments at 10-minute intervals for customer transported origin entry appointments (First-Class Mail, Standard Mail, Periodicals, and Package Services). This applies to one-time and recurring appointments. This will be available in FAST as of November 15, 2009. • 4.4.X: added 10 minute and 5 day rules, as well as class description. • 6.1: Mail.XML 6.0D DeliveryApptShellCreateRequest messages will be designated as drop ship if the PickupOrDelivery element is set to “Delivery”. If the PickupOrDelivery element is set to “Pickup”, the DeliveryApptShellCreateRequest message will be designated as Origin Entry.
Appendix A	WSDL	Removed push WSDLS and XSDs from eDoc, since eDoc does not support PUSH capability. Updated the URL from where the latest WSDL files can be downloaded.
Appendix-B and Appendix-C	-	Removed the exception added in Version 8.3 for the missing state codes and incorrectly spelled state code of Missouri because it will be fixed in Mail.XML 7.0C

Following are the changes from Version 8.3 to Version 8.4

Section #	Title	Description
4.2	Appointment Shell Messages	Removed note for Delivery Appointment Shell messages only working for drop shipment scenarios.
4.5	Delivery Content Messages	Removed note for Delivery Content messages only working for drop shipment scenarios.
4.5.2	Delivery Content Update Message	Added a note about the Delivery Content Update Message and updates to the IMCB for OE content
6.1	Additional Rules/Constraints	Added an additional validation to clarify that the Origin Entry appointments may be scheduled in 10-minute intervals.
6.3	Error Codes/Return Values	Added return codes 3136, 3137, 3138, 3139, 3140, 3141, 3142, 3143, and 3144. Updated text of return code 3053. Added one more variation for Fault Code 500
6.4	CIN Warning Codes and Descriptions	Added warning codes 4028 and 4029. Updated text and explanation of warning codes 4018 and 4020.
6.6	Web Services Additional Constraints	Updated Mail.XML 6.0D namespaces and schema locations
6.8	WSDL Information	Added clarification and links for String-types WSDL and XSD-type WSDLs
Appendix-B and Appendix-C	-	Added an exception note on missing state codes

Following are the changes from Version 8.2 to Version 8.3

Section #	Title	Description
1.4	Exceptions	Added a section “Exceptions” that lists all exceptions of FAST functionality.

The following is the change history from Version 8.1 to Version 8.2

Section #	Title	Description

Copyright © 2016 USPS®. All Rights Reserved.

Section #	Title	Description
Document	All	Changed the reference of Mail.XML 7.0A to Mail.XML 7.0B as latest version of Mail.XML Clarified that FAST messages in Mail.XML 7.0B will be supported in March 2010 release.

All Previous Change History

Section #	Title	Description
Document	All	Created new document 'Postal Service Mail.XML Technical Specification for Appointment Scheduling (FAST)' from the original 'Postal Service Mail.XML Technical Specification Version 7.5'
Document	All	Renamed the 'Errata Identified' column to 'Comment' in all data structure tables
Document	All	Used the correct references of Mail.XML version. Replaced Mail.XML 7.0 references to Mail.XML 7.0A
1.1	What is Mail.XML?	1. Clarified the correct version of the Mail.XML in November release i.e. 7.0A 2. Added clarification on what versions of Mail.XML will be supported in November i.e. Mail.XML 4.0, Mail.XML 6.0D and Mail.XML 7.0A 3. Added table that lists the messages supported in Mail.XML 4.0 specification 4. Added table that lists the messages supported in Mail.XML 6.0D specification 5. Added table that lists the messages supported in Mail.XML 7.0A specification
1.2	Purpose	Added the following Introduction to the Purpose Section: Facility Access and Shipment Tracking (FAST) is a USPS appointment scheduling system utilized by large volume customers to provide advanced notification (logistics and mail content) of mail induction. FAST appointments are required for drop shipments as well as Full-Service customer-transported origin entry mailings. Mailers can provide this data via on-line or Web Services integration between their supply chain systems. Additionally, FAST leverages USPS enterprise systems to incorporate facility information, customer information, address information, and drop ship discounts processed at a corresponding USPS facility. While scheduling, FAST validates the advanced notification information provided by mailers against the "facility profile." Key operational validation questions include: • Is the facility open and staffed to handle drop shipments? • Does this facility accept/process the drop shipment discounted mail that is planned for induction? • Does the volume of mail planned for induction exceed the facility's capacity? Once the advance notification information is validated in FAST, this data is vital to the USPS for facility planning, dock utilization, yard management, and other operational activities. Also Removed the references for MTAC in this section. Also, added clarification that list of error codes, return code, and WSDL are part of this specification
1.3	Environments Supported By USPS	1. Converted existing paragraph into new section 2. This section lists and describes the environment that will be supported by USPS in November 2009

Copyright © 2016 USPS®. All Rights Reserved.

Section #	Title	Description
		3. Removed the 'CAT (Customer Acceptance Environment' paragraph from this section
2.5	FAST Workflows for Mail.XML 6.0	Added Section for FAST Workflows for Mail.XML 6.0
3.0	Mail.XML 4.0 Specifications	Added data structures for the Mail.XML 4.0 Specification supported messages as per the family of messages. Added a new Section for Mail.XML and provided the updates.
4.0	Mail.XML 6.0D Specifications	Added data structures for the Mail.XML 6.0D Specification supported messages as per the family of messages.
4.1.2	AllApptCloseoutResponse Message	Added "CreatorSchedulerCRID' or type Mail.XML_base:CRIDTYpe as an optional attribute.
5.0	Mail.XML 7.0A Specifications	Added the only changes to from Mail.XML 6.0D to Mail.XML 7.0A
6.5	Fault Codes	Updated the Fault Error Codes. Added three variations of 412 and one variation of 403 fault codes.
6.8	*PostalOne!* WSDL Information	Added clarification on WSDL and User Authentication XSD and provided links for downloading WSDL and links for accessing the web service in Production and TEM environment
Appendix A		Added Appendix A for WSDLs and XSDs from the original Mail.XML Specification
Appendix A		Added Appendix A for Complex Types Data Structure for Mail.XML 4.0 Specification for FAST Messages with message descriptions in Alphabetical order
Appendix C		Added Appendix C for Complex Types Data Structure for Mail.XML 6.0D Specification for FAST Messages with message descriptions in Alphabetical order

Copyright © 2016 USPS®. All Rights Reserved.

INDEX

A

AADC 58
ACS 152, 164
actual piece count 62
Actual Piece Count 62
AllApptCloseoutRequest 10
AllApptCloseoutResponse 4, 90
AllDeliveryApptCloseoutRequest 4
appointment. 1, 5, 7, 8, 9, 10, 11, 12, 13, 15, 20, 26, 29, 30, 40, 57, 59, 60, 61, 62, 64, 65, 81, 82, 89, 90, 91, 94, 97, 100, 103, 108, 109, 116, 117, 121, 127
approved 6
ASF 58
authenticate 6
automated 64
AvailableSlots 59, 99

B

barcode 8, 60, 82
Bedload 57, 104, 129
BMEU 26, 57
Bound Printed Matter 59
Business Customer Gateway 8

C

cancelled 156
Cast of Characters 1
class 8, 57, 81, 82
closeout .... *See* Closeout
Closeout 10, 90
Consignee 10, 13, 20
Consignee Appointment ID 13
ConsigneeApptID 59, 60, 63, 64, 100, 102, 112, 113, 119, 122, 123, 124, 126, 128, 129
ConsigneeContentID 60, 64, 102, 103, 129
ConsigneeGoodsReceipt...4, 10, 27, 29, 30, 31, 32, 33, 34, 35, 36, 38, 39, 40, 43, 44, 90
container 1, 5, 8, 9, 59, 60, 82, 117, 130, 137
container barcodes 5
Corporate Scheduler ID 82
Country 59
create 1, 7, 8, 29, 30, 81, 90, 116, 121
CRID 8, 39, 46, 61, 64, 91, 127
Cross Dock 57, 58
CSA 9, 46
CSAID 9, 61, 64
CustomerSupplierAgreementQueryRequest ...4, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 91
CustomerSupplierAgreementQueryResponse 4, 46, 89

D

date range 121
Delivery Content Query 60, 82
DeliveryApptCancelCreateRequest 4, 64
DeliveryApptCancelCreateResponse 4, 85, 89
DeliveryApptCancelRequest 4, 9, 37, 64, 82
DeliveryApptCancelResponse 4, 38, 89
DeliveryApptCreateRequest 4, 8, 11, 13, 62
DeliveryApptCreateResponse 4, 8, 11, 89
DeliveryApptQueryRequest 4, 8
DeliveryApptQueryResponse 4, 8, 89
DeliveryApptShellCancelRequest 4, 64, 82
DeliveryApptShellCancelResponse 4
DeliveryApptShellCreateRequest 4, 13, 14, 15, 17
DeliveryApptShellUpdateRequest 4, 10, 64
DeliveryApptShellUpdateResponse 4, 10, 89
DeliveryApptUpdateRequest 4, 9, 82
DeliveryApptUpdateResponse 4, 9, 89
DeliveryContentCancelRequest 4, 10, 91
DeliveryContentCancelResponse 4, 10, 89
DeliveryContentCreateRequest..... 4, 10, 11, 12, 19, 20, 21, 22, 23, 24, 91
DeliveryContentCreateResponse 4, 10, 11, 12, 89
DeliveryContentQueryRequest 4, 10, 11, 91
DeliveryContentQueryResponse 4, 10, 89
DeliveryContentUpdateRequest 4, 10, 64, 91
DeliveryContentUpdateResponse 4, 10, 89
Destination Entry 9, 30
discounted 5
DMU 26
dock utilization 5
drop ship 5, 26, 34, 39, 59, 62, 63, 64, 65, 81
Drop Ship Product 57, 81
drop shipment 5, 65
drop shipped 8
DropAndPick 57

E

eDoc 1, 7, 9, 12
eDocumentation .... See eDoc
electronic 1
Error Codes 69, 82
Exceptions 7

F

Facilities Access and Shipment Tracking 8
facility 5, 11, 12, 57, 63, 64, 81, 98, 99, 125
Facility Access & Shipment Tracking 8
FAST1, 3, 5, 7, 8, 10, 11, 12, 13, 26, 27, 29, 30, 32, 34, 37, 38, 39, 41, 46, 57, 61, 62, 63, 64, 69, 81, 82, 89, 90, 91, 92, 93, 94, 97, 100, 102, 103, 111, 114, 115, 116, 121, 127
First-Class 26, 30, 33, 34, 37, 57, 64
Full-Service 1, 8, 12, 39, 82, 145, 169
FullServiceStartTheClockQueryRequest 6

I

IDEAlliance 1, 5, 8, 62, 63, 64
IMCB 13, 59, 60
induction 5
Intelligent Mail 6, 8, 20, 65

J

Joint Scheduling 10, 11

Copyright © 2016 USPS®. All Rights Reserved.

L

Library 59
logistics.....5, 9, 10, 61, 65
Logistics 82

M

M Bags 59
machinable.....136, 173
Mail Owner 8, 9, 11, 12, 61, 62, 82, 90
Mail preparer 8, 9
Mail.dat.....1, 5, 7, 8, 9, 12, 57, 62, 63, 82
Mail.dat Transportation updates 12
Mail.XML . 1, 3, 5, 6, 7, 8, 9, 11, 12, 13, 61, 86, 87, 90, 93, 132, 164, 168, 174
Mail.XML 4.0 90
Mail.XML 6.0 90
Mail.XML 8.0 90
Mailers.....5, 7, 82
manifest.....1
Media.....59
message.... 5, 12, 13, 14, 15, 16, 17, 19, 20, 22, 23, 26, 27, 29, 30, 32, 34, 37, 38, 39, 41, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 62, 63, 64, 81, 82, 85, 86, 87, 89, 90, 91, 92, 108, 109, 111, 120, 127
MessageResponseRetrievalRequest 4, 86, 89
MessageResponseRetrievalResponse 4
Mixed ADC 58
MLOCR 1, 149, 150, 164

O

One time.....9, 30, 33, 37
One Time Appointment..... See one-time
one-time 8, 9, 39, 60, 64
Origin Entry 20, 30, 33, 34, 37, 39, 59, 62, 64, 65, 82

P

Package Services.....30, 33, 34, 37, 59, 64, 135, 148
Pallet 57, 64, 117
PalletPresortType.....117
Pallets.....62, 104, 129, 135, 136, 137
PalletUnitType 117
Parcel Post 59
Parcel Select 59
Partner Appointment Query.....9, 61
PartnerApptQueryRequest 4, 9, 91, 92
PartnerApptQueryResponse 4, 9, 90
password.....86, 91
Password.....6
Periodicals. 11, 30, 33, 34, 37, 57, 64, 135, 143, 145, 148, 156, 159
Perishable 63, 98, 104, 125, 129
pieces.....177
postage.....177
Postage 1, 132, 149, 158
postage statements 1
PostalOne!... 1, 5, 6, 7, 8, 10, 12, 13, 27, 57, 63, 64, 82, 89, 90, 91, 94, 116, 127, 137, 188
PostalOne! system overview 1
Presort.....57, 58, 62
presorts 62
Processing Categories 57

Q

qualification reports 1

R

R 12, 58, 60, 64
Rapid Information Bulletin Board System.....*See* RIBBS
recurring.... 9, 11, 12, 13, 26, 30, 33, 34, 37, 60, 61, 64, 65, 82, 121
Recurring Appointment 9, 11, 12, 61
RecurringApptQueryRequest 4, 11, 13, 26, 91, 92
RecurringApptQueryResponse 4, 11, 26, 90
Reports 8
ReturnInfo block.....59, 60, 61, 82, 85
RIBBS 5, 6, 8

S

scenarios.....63
Scheduled Induction Date 13
Scheduler..... 9, 61, 62, 63, 64, 82, 90, 91
Scheduler CRID 91
SchedulerContent ID.....90
SchedulerContentID..... 64, 102, 103, 116, 129
SchedulerCorpID13, 63, 91, 100, 106, 112, 113, 114, 119, 122, 123, 124, 126, 128, 129
SchedulerID .. 13, 63, 64, 91, 92, 100, 106, 112, 113, 119, 123, 124, 127, 128, 129
shape 8, 57, 81
Shell 60, 91
SiblingBarcode.....63, 131
single Entity.....8, 9
Single Piece 58
SOA 1
SOAP 86
specification 1, 5, 6, 57, 62, 63, 64, 90, 93
Speedline 57
stand-alone content.....63, 65
Standard 11, 30, 57, 64
Standard Mail..... 135, 142, 144, 148, 162
SubmittingParty5, 13, 14, 16, 17, 19, 20, 22, 23, 26, 37, 46, 47, 49, 50, 51, 52, 53, 54, 55, 86, 127

T

Test Environment for Mailers Checklist and Troubleshooting Guide 6
tracking ID.....86
transactions.....6
Transporter 8, 9, 10, 11, 12
Trays 135, 137

U

UniqueContainerBarcode..... 62, 63, 116, 130
UniqueContainerBarcodes..... *See* UniqueContainerBarcode
UnscheduledConsigneeGoodsReceipt 4, 10, 13, 41, 90
UPD 158
Urban Direct.....58
USPS .. 1, 5, 6, 7, 8, 10, 11, 12, 57, 59, 62, 63, 64, 86, 90, 117, 173
USPSSummary..... 7, 61, 62, 63, 64, 81, 114, 116, 117
USPSSummaryBlock 60, 61

Copyright © 2016 USPS®. All Rights Reserved.

V

VerificationZip4 ..... 63, 116
volumes 1

W

Web Services 1, 5, 8, 46, 57, 63, 64, 65, 69, 89, 90, 91
WSDL 6, 7, 82, 89, 180

X

XSD 5, 81, 93

Y

yard management 5

Z

Zip Code 57
Zone 177, 178
zone skipping 8

Copyright © 2016 USPS®. All Rights Reserved.